

RADIO-AUTOMOBILES-NEW INVENTIONS

Reg. U.S. Pat. Off.

# Popular Science

FOUNDED MONTHLY 1872



Jack Binns' Ten Commandments for Success with Your Radio Set (Page 42)

How to "Tune Up" Your Car and Double Your Mileage

NOVEMBER

Over 70 Useful Things to Make with Tools

25 CENTS

Copyrighted material



# VACUUM TUBES CUNNINGHAM

## *Built To Give Maximum Efficiency*

VACUUM tubes are used for two distinct individual purposes in a receiving set—as DETECTORS and as AMPLIFIERS. The qualifications of a tube for these two uses are so different that for maximum efficiency tubes of entirely different design must be used.

This point was one of the chief considerations of the research engineers who designed Cunningham tubes in the great laboratories of the General Electric Company. After years of research and experimental work, the Cunningham C-300, a SUPER-SENSITIVE DETECTOR, and the Cunningham C-301, a DISTORTIONLESS AMPLIFIER, were developed. These two tubes, now nationally recognized as standards for all types of receiving sets, are responsible for the highly perfected results obtainable in radio phone reception.

### *Amplifies As It Detects*

TYPE C-300  
GAS CONTENT  
DETECTOR

**\$5<sup>00</sup>**

TYPE C-301  
HIGH VACUUM  
AMPLIFIER

**\$6<sup>50</sup>**

#### PATENT NOTICE

Cunningham tubes are covered by patents dated 11-7-05, 1-15-07, 2-18-08 and others issued and pending. Licensed only for amateur or experimental uses in radio communication. Any other use will be an infringement.



The trade mark GE is the guarantee of these quality tubes. Each tube is built to most rigid specifications.



*E. J. Cunningham*

Trading as  
AUDIOTRON MFG. COMPANY

218 First Street  
San Francisco, Calif.

154 West Lake Street  
Chicago, Illinois





# An Amazingly Easy Way to Earn \$10,000 a Year

*Let Me Show You How Free*

**T**O the average man the \$10,000 a year job is only a dream. Yet today there are a surprising number of men earning five figure salaries who were merely dreaming of them a short while ago. The secret of their success should prove a startling revelation to every ambitious man who has ever aspired to get into the \$10,000 a year class.

There is nothing fundamentally "different" about the man whose salary runs into five figures. He is made of the same stuff as you and I. It is not necessary that he must enjoy the privilege of some influential connection or "pull." For example take J. P. Overstreet, of Denison, Texas. A few short years ago he was a police officer earning less than \$1,000 a year. To-day his earnings are in excess of \$1,000 a month—more than \$12,000 a year. C. W. Campbell, Greensburg, Pa., was formerly a railroad employee on a small salary—last month his earnings were \$1,562.

## Why Salesmen Earn Such Big Pay

Just stop a moment and think over the successful men of your acquaintance. How many of them are connected with some form of selling? If you will study any business organization you will see that the big jobs go to the men who sell, for upon their efforts depend the profits a company makes. Without trained men to place a product on the market, the finest goods are worth no more than so much clay. Salesmen are the very nerve centers of a business. Is it any wonder that they earn big pay?

The man who starts working as a bookkeeper or clerk for \$25.00 a week, never increases his value to the firm. Any advance in pay is merely a reward for length of service. At the end of ten years he is no more essential to the life of the organization than he was at the end of ten weeks. He is only a necessary liability—drawing his pay because somebody must be found to work at the unimportant, routine jobs. Once established in the rut, he becomes a cog in the machine—when he is worn out, he can be easily and cheaply replaced.

## Why Don't You Get Into the Selling Field?

Mr. Overstreet, Mr. Campbell and the others whose letters you see on this page are all successful salesmen. They realized their ambitions by landing \$10,000 jobs in an amazingly simple way, with the help and guidance of the National Salesmen's Training Association. Sometime—somewhere back in the past, each one of them read of this remarkable course of Salesmanship training and Employment Service just as you are reading of it to-day. Each one of them was dissatisfied with his earning capacity—as perhaps you are—and each one cast his lot with the N. S. T. A. To-day they are important factors in the business world—enjoying all the comforts and luxuries money can buy. And yet they are not ex-

ceptions, for there are thousands of N. S. T. A. trained salesmen who are making big money, as we will be only too glad to show you if you will mail the coupon.

## We Train You and Help You Land a Job

The National Salesmen's Training Association is an organization of top-notch salesmen and sales managers formed for the express purpose of training men in the science of successful selling. You do not need to know the first thing about selling—for the N. S. T. A. trains you from the ground up—gives you a complete insight into selling methods—in your spare time without making it necessary to give up

your present position until you are ready to begin actual selling.

In addition to this remarkably efficient course of training, the N. S. T. A. maintains a Free Employment Service to help its Members to jobs in the lines for which they are best suited. This in itself is of incalculable value for it allows the prospective salesman to make a complete survey of the selling field and to select the work which most appeals to him.

## ☐ Salesmen Are Needed—Now!

Get out of that rut! Work for yourself! Salesmanship is the biggest paid of all professions. Just because you have never sold anything is no sign that you can't. We have made Star Salesmen of men from all walks of life, with no previous selling experience. These men have jumped from small pay jobs to big selling positions and handsome incomes. The same training on which they founded their success is open to you. You can follow in their footsteps. Why don't you get in a class with men who make real money? Never before have the opportunities been greater. At least you cannot afford not to investigate the great field of selling and see what it offers you. It will only cost you a 2 cent stamp and the facts and proof you will receive will surprise you.

## Free Book on Salesmanship

Just mail the coupon or write for our free illustrated Book, "Modern Salesmanship," which we will be glad to send without any obligation on your part. Let us prove to you that regardless of what you are doing now, you can quickly become a Star Salesman. Let us show you how you too can step into the ranks of these big money makers of business. See how easily you can learn this fascinating, big pay profession at home in your spare time. Learn what we have done for others and what we stand ready to do for you. Don't put it off until to-morrow—write us to-day. Every hour lost keeps you that much farther from success. Mail the coupon at once.

## National Salesmen's Training Association

Dept. 15-S, Chicago, Ill., U. S. A.

## National Salesmen's Training Association

Dept. 15-S, Chicago, Ill., U. S. A.

Please send me, without any obligation on my part, your free Book, "Modern Salesmanship," and full information about the N. S. T. A. system of Salesmanship training and Employment Service. Also a list showing lines of business with openings for salesmen.

Name .....

Street .....

City .....

Age..... Occupation.....

## Read These Amazing Stories of Quick Success

### Earned \$524 in Two Weeks

I have never earned more than \$60 a month. Last week I cleared \$306 and this week \$218. You have done wonders for me.—Geo. W. Kearns, Oklahoma City, Okla.

### I Now Earn as High as \$100 a Day

I took your course two years ago. Was earning \$16 a week clerking. Am now selling many of the largest firms in the U. S. I have earned more than \$100 in a day. You secured me my position. Our Sales Manager is a graduate of yours.—J. L. DeBonis, Chicago, Ill.

### Earns \$1,562 in Thirty Days

My earnings for the past thirty days are \$1,562, and I won Second Prize in March although I only worked two weeks during that month.—C. W. Campbell, Greensburg, Pa.

### Earned \$1,800 in Six Weeks

As soon as I received a letter from you and your literature, I knew that I was on the right track and very soon after I applied for a position as a Salesman to one of the firms whom you informed me were in need of a Salesman and to whom you had recommended me. As soon as they received my application, which was by mail, they wired me to come for an appointment which I did, with the result being that I sold my service to them in about thirty minutes, took a territory in Illinois and Wisconsin and made a success of it from the very first week.

From that time on I have been what might be termed as a "high pressure" Salesman, selling lines where nine out of ten Order Takers would fail. I have sold goods in a highly successful manner in nine or ten States, both North and South. My earnings for March were over \$1,000 and over \$1,800 for the last six weeks, while last week my earnings were \$356.00. I travel eleven months out of the year, working five days each week.

The N. S. T. A. dug me out of a rut where I was earning less than \$1,000 a year and showed me how to make a success.—J. P. Overstreet, Denison, Texas.



# POPULAR SCIENCE MONTHLY

NOVEMBER, 1922; Vol. 101, No. 5  
25 cents a Copy; \$2.50 a Year



Published in New York City at  
225 West Thirty-ninth Street

## Our National Crime against Good Health—the Way We Heat Our Homes!

**T**HE fact that the air in your home during the winter is more arid than the atmosphere of any desert in the world may astonish you. But do you realize, also, that it involves an actual and grave menace to your health?

Read what noted experts have to say. You will learn that leading specialists consider the overheated dryness of the American home to be one of the chief causes of bad colds, sore throats, and serious winter infections of all kinds. Minor annoyances such as chapped hands are caused primarily by the dry heat indoors.

### For Your Health's Sake

**D**O YOU know that soon after steam heat is turned on in apartments and offices, statistics show that illness takes a sudden jump?

There is probably no single convenience of modern homes that is so outright a menace to general health as the much-vaunted central heating system which Europe envies America!

**A**MAZING facts about heating arrangements, humidity, and health discovered by engineers and physicians, but ignored by the general public, are revealed in an eye-opening article in the next issue of POPULAR SCIENCE MONTHLY. This article is of vital importance to all your family's welfare.

### A Whole Year for \$2.50

**M**AKE sure of having POPULAR SCIENCE MONTHLY come to you regularly for the next year. You want to keep up with the marvelous new discoveries of science. Every issue will contain practical suggestions worth more than the subscription price. Send \$2.50 for one year's subscription.

## Uncle Sam Says Your Car Is Wasting 30% in Gas— Learn How to Save It!

**G**OVERNMENT engineers declare the average motorist wastes from 20 to 30 per cent of gasoline, just through faulty carburetor adjustment.

In the next issue of POPULAR SCIENCE MONTHLY are described the extraordinary results of recent experiments by the United States Bureau of Mines, which show that for lack of a simple device to switch the average carburetor instantly into various adjustments for hill climbing, starting, straight running, weather changes, etc., about one third of the 550 gallons of gasoline annually used by most motorists is practically thrown away.

**W**OULD'N'T you like to increase your mileage 23 per cent? That is what these government engineers did in the case of one popular-priced car, by simply adjusting the carburetor scientifically. And they have had similar success with many other makes.

You can do likewise. Harold F. Blanchard, POPULAR SCIENCE MONTHLY's automobile expert, tells in the next issue how to make these simple attachments.

### Your Radio Problems

**D**ON'T miss Jack Binns' "Ten Commandments for the Users of Vacuum Tube Sets." It gives expert advice and information to every man interested in radio.

### "Standard Radio Guide"

**T**HIS is the ideal book for the radio amateur. It tells simply and clearly all you want to know. It was written by the Radio Editor of POPULAR SCIENCE MONTHLY and answers all the questions our readers have asked about radio.

Price 50 cents postpaid.

## CONTENTS

	Page
How Aerial Yachtsmen May Tour Skies.....	25
Plant Hunters Bring Us New Foods.....	28
America's Longest Tunnel.....	31
Flat Bottomed Liners for Comfort.....	33
Life Germs from Other Worlds.....	40
Jack Binns' Ten Radio Commandments.....	42
Tiny Trains Win Race with Flood.....	45
Paper Models Test Strength of Arches.....	47
Novel Photographs from the News.....	48
Office Safes Survive Test Oven.....	50
Strange Relics of a Lost Race.....	53
How Diver Patched Ship's Bottom.....	55
New Shoe with "Automatic Fit".....	56
"Sugar Cane Lumber" for Homes.....	61
How to Tune Up Your Car.....	72
Useful Inventions for Car Owners.....	75

And 116 Important News Articles

## THE HOME WORKSHOP

Seventy New Ideas for Tool  
Users, pages 77-128

\$75 in Prizes—See pages 44 and 92

## POPULAR SCIENCE MONTHLY

Issued monthly. Single copy, 25 cents. Yearly subscription to United States, its possessions, and Canada, \$2.50; foreign countries, \$3.

Entered as second-class matter Dec. 28, 1918, at the Post Office at New York under the act of March 3, 1879. Entered as second-class matter at the Post Office Department, Canada. Printed in U. S. A.

Copyright, 1922, by the Modern Publishing Co.

The contents of this magazine must not be reprinted without permission.  
H. J. Fisher, President; R. C. Wilson, Vice-President  
O. B. Capen, Secretary and Treasurer

POPULAR SCIENCE MONTHLY,  
225 W. 39th St.,  
New York, N. Y.

Please enter my subscrip-  
tion for one year for \$2.50.

NAME .....

ADDRESS .....

POPULAR SCIENCE MONTHLY,  
225 W. 39th St.,  
New York, N. Y.

Send me, postpaid, your  
handbook, "The Standard  
Radio Guide." I inclose  
Fifty Cents (cash, check, or  
money order).

NAME .....

ADDRESS .....



# The Only Sure Way to Avoid Embarrassment



Do you know the correct thing to say in this embarrassing situation?



Do you know the correct thing to wear to every social occasion?



Do you know how to word invitations, acceptances, etc.?



Do you know how to create conversation when left alone with a noted person?



Do you know what to say when you arrive late at an entertainment?

WE have all had our embarrassing moments. We all suffered moments of keen humiliation, when we wished that we had not done or said a certain thing. We have all longed, at some time or other, to 'know just what the right thing was to do, or say, or write.

Every day, in our business and social life, puzzling little questions of good conduct arise. We know that people judge us by our actions, and we want to do and say only what is absolutely in good form. But, oh, the embarrassing blunders that are made every day by people who do not know!

## The Only Way

There is only one sure way to be calm and well-poised at all times—to be respected, honored and admired wherever you happen to be. And that is by knowing definitely, positively, the correct thing to do on all occasions. Whether you are dining in the most exclusive restaurant or at the most humble home, whether you are at the most elaborate ball or the most simple barn-dance, whether you are in the company of brilliant celebrities or ordinary people, you will be immune to all embarrassment, you will be safe from all blundering mistakes—if you know the simple rules of etiquette.

## What Is Etiquette?

Etiquette is not a fad. It is not a principle or theory or belief. It is meant not merely for the very wealthy or for the extremely well-educated. It is meant for all people, who, in the course of their everyday life, find it necessary to keep themselves well in hand; to impress by their culture, their dignity; to know how to be trusted and respected in business and admired in the social world; and for women who wish to be considered at all times cultured and charming.

It is embarrassing to overturn a cup of coffee and not know just what to say to the hostess. It is embarrassing to arrive late to an entertainment, and not know the correct way to excuse yourself. It is embarrassing to be introduced to some brilliant celebrity, and not know how to acknowledge the introduction and lead subtly to channels of interesting conversation.

The man who is polished, impressive, and the woman who is cultured, will find the doors of the most exclusive society opened to admit them. But the world is a harsh judge—and he who does not know what to do and say and wear on all occasions will find himself barred, ignored.

You have often wondered how to word invitations, how to acknowledge introductions, how to ask a lady to dance, how to act at the wedding, the funeral, the theatre, the opera. Here is your opportunity to find out the absolutely correct thing to do,

say, write and wear on all occasions.

The Book of Etiquette, in two large volumes, covers every detail of every-day etiquette. It tells you how to act at the dinner table, how to excuse yourself if you drop a fork, how to write and answer invitations, how to make and acknowledge introductions. It tells you what to wear to the dinner, the dance, the party, what to take on a trip to the South.

You cannot do without the Book of Etiquette. You need it to refer to whenever some important event is pending. You need it to refer to whenever you are in doubt, whenever you are puzzled, anxious. It corrects the blunders you have perhaps unknowingly been making; helps you to avoid all embarrassment; shows you the way to be always, at all times, cultured, impressive and charming.

## Send No Money Five-Day FREE Examination

The complete two-volume set of the Book of Etiquette will be sent to you FREE for 5 days. Glance through the books. Read a page here and there. See for yourself some of the blunders you have been making. You will immediately realize that the Book of Etiquette is a wonderful help to you.

Just mail the coupon below, filled in with your name and address. Don't send any money—just the coupon. The two-volume Book of Etiquette will be sent to you at once—FREE to read, examine and study. After 5 days you have the privilege of returning the books without obligation, or keeping them and sending \$3.50 in full payment.

## Do It NOW!

Send off the coupon today—now—before you forget. You've often wondered what you would do or say in a certain embarrassing situation. You've often wished you had some authoritative information regarding right conduct.

Don't overlook this opportunity to examine for yourself the famous Book of Etiquette. Don't wait until some very embarrassing incident makes you regret that you never knew the right thing to do or say. Here's your opportunity to examine the Book of Etiquette in your own home without cost. You cannot afford to miss this opportunity. Mail the coupon NOW. Nelson Doubleday, Inc., Dept. 2511, Garden City, N. Y.

## NELSON DOUBLEDAY, INC.

Dept. 2511, Garden City, N. Y.

Without obligation on my part, and without any money in advance you may send me the complete two-volume set of the Book of Etiquette for free examination. Within 5 days after receipt I will either return the books or keep them and send you only \$3.50 in full payment.

Name..... Please print name and address

Address.....

☐ "Check this square if you want these books with the beautiful full-leather binding at five dollars with 5 days' examination privilege."



Do you know the embarrassing blunders to be avoided at the wedding?



Do you know the correct way to introduce people?



Do you know how to avoid embarrassment at exclusive restaurants?



Do you know the correct etiquette of the theatre and opera?





## The New Sweeney Radio-Phone

### Specifications Sweeney Radio-Phone

**Cabinet:** Genuine solid walnut, hand rubbed.

**Circuits:** Tuning circuit consists of an antenna inductance with four taps and a series variable condensers wave lengths from 175 to 550 meters. Two Radio frequency, detector, and two audio frequency amplifying tubes.

**Panel:** Bakelite 7x20 3/4. 3/16 inch thick Control Knobs. Smooth running and easily adjusted. Only two adjustments required in tuning.

**Terminals** are in rear of the cabinet to which the aerial ground, A battery and B battery are connected.

**Wiring** and connections substantially made with 1/16 inch brass rod with cambric tube sleeving.

Recognizing the demand for a set to receive the radiophone broadcasting of entertainment features as well as market reports and government information, our engineers have developed this receiver which incorporates simplicity of operation with its ability to receive long distance stations with clearness and sufficient volume to operate a loud speaking horn. The wave length range will cover those being used for the broadcasting of musical programs as well as the government live stock markets, grain quotations and weather forecasts. All sets are carefully constructed with the best quality of material and most careful workmanship. Each set is rigidly examined and tested before it is released. Radio frequency amplifications, one of the newest developments in radio reception, is used, which accounts for the extreme sensitivity of the instrument and enables the operator to pick up long distance stations. The audio frequency amplification increases the signal strength to such a volume that any type of loud speaking horn at present on the market may be operated. Write for special low introductory price.

### SWEENEY BROADCASTING W. H. B.


#### This Is One of the Largest Inland Stations in the Country

and sends out official Government market and weather reports every day, besides giving musical, educational and religious programs on Sundays, Tuesdays and Thursdays. Through the courtesy of C. G. Conn & Co., Elkhart, Ind., Makers of Musical Instruments, we are broadcasting some of their concerts.

This station cost \$50,000 to erect. CALL IS—WHB—360 meters for concerts and 485 for Government reports. 500 watts W. E. set provides its power. This great of the Sweeney Company to serve you in the purchase of all supplies and equipment.


### Get This Radio Catalog and Instruction Book

Every radio enthusiast should have a copy of this valuable book which is just off the press. Contains new and interesting matter and descriptions and hints that will save you time and money, including hookups showing connections of crystal, regenerative, and high frequency amplification apparatus and give you much better results. Do not buy any radio supplies until you have seen this book as we have gone into this business on a great scale and are prepared to supply you with the best and most efficient new material at lowest prices. This book has been prepared by some of the best known electrical and radio engineers and practical instructors. Sent on receipt of Twenty-Five cents in stamps. Get your copy today.

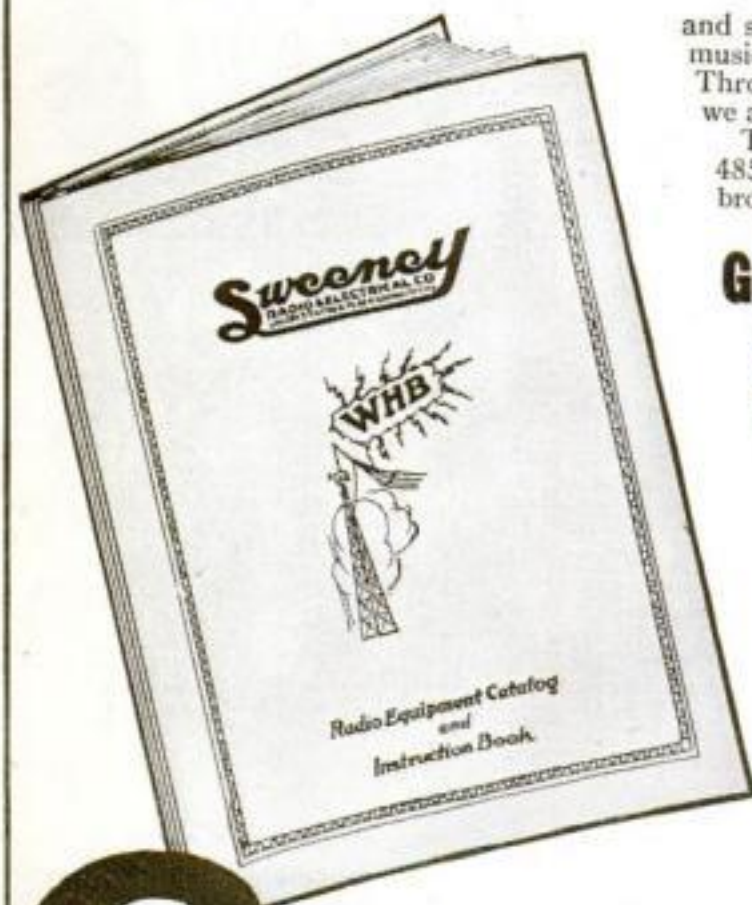

# Sweeney

**RADIO & ELECTRICAL CO**  
1113 UNION STATION PLAZA, KANSAS CITY, MO

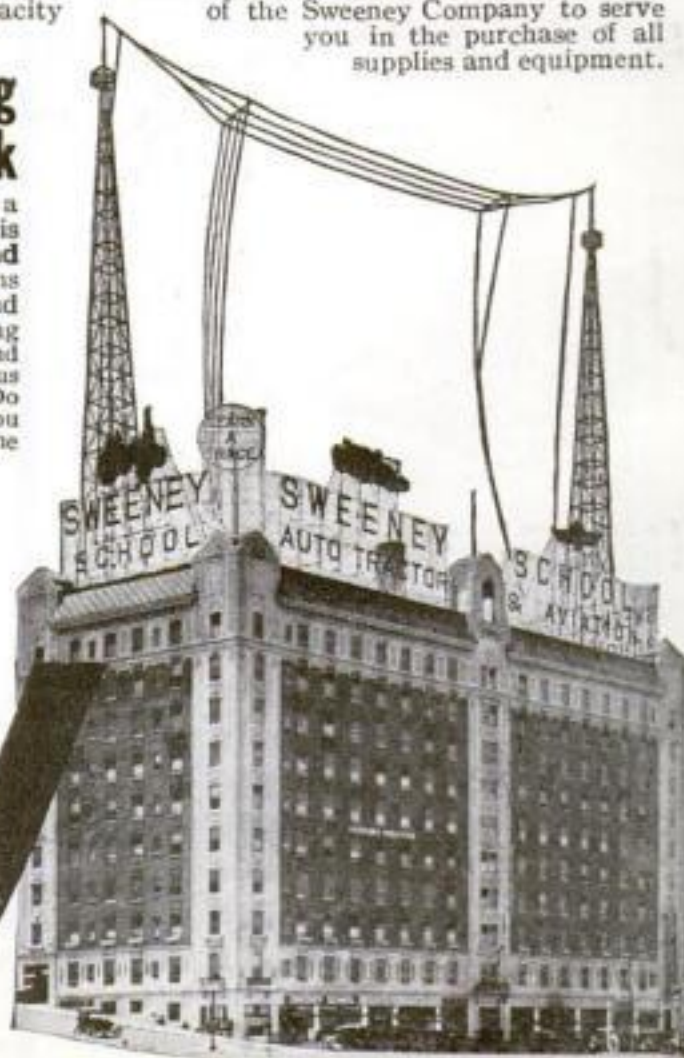



1	2	3	4	5	6	7
bright	white	attractive	active	good	real	strong
radiant	snowy	pleasing	busy	fine	true	potent
vivid	chalky	charming	alert	splendid	genuine	powerful
brilliant	milky	magnetic	brisk	excellent	sterling	keen
glowing	hoary	enticing	lively	prime	sincere	intense

# Pick Out the 7 Best Words

*Can you tell which is the most convincing word in each list? Try it. Learn to use words that win.*

**S**TUDY the words at the top of this page. See if you can select the most effective word in each list.

It's a mighty important thing to do. For the ability to use the right words in the right way, is one of the biggest, money-making powers you can possess.

No matter *who* you are—*where* you are—or *what* your daily task—words are the tools with which you work.

The only way you accomplish anything is through the use of words.

It makes no difference whether you are selling goods, buying goods, applying for a position or asking for an increase in salary, you *must* do it with words.

Therefore, the knowledge of how to use *powerful, constructive, convincing* words instead of *weak, negative, ineffective* words is of the utmost importance to you every waking minute of the day.

One reason why so many people are less than fifty per cent. efficient in speaking or writing, is because they use old, overworked, played-out, unconvincing words and phrases that have lost their power to interest and convince—words that no longer possess any real, forceful meaning.

To learn to use *right* words instead of *wrong* words, get and read our new, free book, *The Secret of Making People Say "Yes."*

## Wrong Words Are Costly

The mistakes you make in the use of words cost money.

You gain or lose your friends—your position—your customers—your practice—your trade—by what you say and what you write.

Knowing how to express yourself in words that attract, interest and convince, often means the difference between humiliating failure and triumphant success.

Why is it that some salesmen earn \$10,000 a year, while others, in the same line of work and with the same opportunities make only \$3,000?

Why is it that one public speaker causes his audience to cheer with approval, and another speaker leaves them cold and unresponsive?

Why is it that one letter lands a good position while others only land in the waste-basket?

Why is it some people are popular in society and make hosts of friends, while others, equally deserving, make no social headway whatever?

The answer is simple. It is because some people know *what* to say and *how* to say it. Others do not.

The subtle knack of expressing ourselves in a way that immediately secures the attention of others—the power to use interesting, forceful language—*language that convinces*—is the secret of success in almost every walk of life.

How to attain this knack is clearly set forth in our free booklet.

## \$10,000 a Year to Write Letters

Not long ago a business house advertised for a man to write their sales letters. The position paid a salary of \$10,000 a year. The

man who got the job and earns that handsome salary, does so simply because he knows how to use *persuasive, compelling* words instead of *ordinary, unconvincing* words.

There is an expert letter writer in New York City who prepares sales letters for some of the biggest business houses. It is said that he receives as high as \$500 for a single letter. This seems a big price. But when you know that one of his letters sent to a big list of names, brought in more than \$150,000 in orders, you can easily see that such a business-bringing letter is cheap at two or three times \$500.

Any man who can put words on paper—in letters, circulars, catalogs, etc.—in a way that attracts, interests and convinces his readers can charge a great big price for his services.

And remember this: the only difference between the successful letters, circulars, or catalogs, and the unsuccessful ones—the kind that fill waste-baskets—is the difference in the words they contain—the

# FREE!

Mail coupon at once for a free copy of our new booklet which gives *The Secret of Making People Say "Yes."* You will find it amazingly interesting. Only 10,000 copies are now being distributed. They won't last long. So, get yours today!

difference between *clear, positive, convincing* language and *hazy, negative, unconvincing* language. You will be interested in this important point as set forth in our free booklet.

## Overcome Timidity and Fear

One of the important things that a knowledge of words—a mastery of speech—brings to you, is a total freedom from humiliating embarrassment and self-consciousness.

Men and women who are able to express themselves freely and fluently—who know what to say and how to say it—under all circumstances—never fall victims to the distressing influences of timidity and fear.

The ability to talk or write *clearly, readily* and *easily* at all times and under all conditions, produces a *poise and power* that can be obtained in no other way.

That quaking nervousness—that chilling fear—that overcomes most people when meeting strangers, when called upon to make a speech, or when they find themselves in any unusual position, is due almost entirely to the fact that they lack the power of self-expression. They do not know what to say or how to say it.

Why suffer in this way? Get our free book and learn how to get rid of this embarrassing difficulty.

## Success Depends on Words

We are all salesmen—every mother's son of us. Some of us are selling merchandise. Some are selling services. Some are selling only themselves.

But every one of us is trying to sell something to somebody. In other words, we are trying to convince somebody of something. We are trying to get others to do what we want them to do. We are trying to get them to say "Yes" instead of "No."

And we must do it with words. So, you see, we all need a knowledge of the right use of words, because we all want to become better salesmen, no matter what we are selling.

The only way we can sell is by talking or writing. Therefore, our success depends upon our knowledge of what words to use and how to use them.

Get this important knowledge and get it now.

## What Right Words Will Do For You

Our free booklet—*The Secret of Making People Say "Yes"*—points out the quickest and easiest way for you to learn to express yourself with the forceful effectiveness that persuades people to *do what you want them to do*.

It shows you how to gain a command of powerful English that enables you to get a good—or a better—position

- secure an increase in salary
- successfully handle important business deals
- make bigger sales and more of them
- explain embarrassing mistakes
- collect money
- write letters that win
- secure financial, and other accommodations.
- attract worth-while friends
- win the admiration of those you care for.

A knowledge of the skillful use of words *doubles* your powers of accomplishment by *doubling* your ability to influence others. It gives you the *power to persuade*, which is the real secret of success.

Get this free book at once. It is the key to effective speech.

## Do Not Delay

Send for this free book now. Do not put it off. Only 10,000 copies are now being distributed. They are sent to any one who asks for them—without cost or obligation of any kind. They will not last long. So, if you want one, be prompt.

You cannot possibly judge in advance of seeing it, what this little book can do for you, but

—by showing you how to get the maximum results from the right use of words;

—by showing you how you can easily acquire the word power to attract, interest and convince others;

—by showing you just how to please people and persuade them to say "Yes" instead of "No," it will convince you, beyond a shadow of doubt, that you took a wise step in sending for it, and that it is the most fascinating and valuable little book of information you ever got for the asking.

Send the coupon today—before the present edition is all distributed. Independent Corporation, Dept. B E-7711, 15 West 37th Street, New York.

## Use This Coupon

INDEPENDENT CORPORATION

Dept. B E-7711, 15 West 37th Street, New York

Gentlemen: I accept your offer of a free copy of *The Secret of Making People Say "Yes."* Mail it at once to

Name .....

Address .....

Pop. Sc. 11-22

Copyrighted material



# QUICK-ACTION ADVERTISING

HERE READERS AND ADVERTISERS MEET TO TRANSACT BUSINESS

Rate 25 Cents a Word. Advertisements intended for the January issue should be received by November 1st

## AUTOMOBILES AND ACCESSORIES

**PATENTS**—Write for free Illustrated Guide Book and Evidence of Conception Blank. Send model or sketch and description of invention for our opinion of its patentable nature. Highest reference. Reasonable terms. Victor J. Evans & Company, 189 Ninth, Washington, D. C.

**PROTECTION** from the Wind, Dust, Rain and Snow. Use "Wear Me" Windshield Wings and motor with pleasure. Fully Guaranteed. Money back if not satisfied after ten days use. Regular set \$12.50, Ford Special \$10.00. Wear Me Auto Specialty Company, 1002 Broadway, Pittsburgh, Pennsylvania. See "Ad" page 115.

**AUTOMOBILE** Mechanics, Owners, Garagemen, Repairmen, send for free copy America's Popular Motor Magazine. Contains helpful instructive information on overhauling, ignition wiring, carburetors, batteries, etc. Automobile Digest, 513 Butler Building, Cincinnati, Ohio.

\$100.00 weekly manufacturing automobile specialties. Repainting, retrimming, automobiles, easily learnt at home. Indispensable to all automobile trades people, motorists, etc. Frederick De Wilde, Sheboygan, Wisconsin.

35 MILES on gallon of gas. Send ten cents, self addressed stamped envelope, names of five friends and receive complete instructions for obtaining this mileage on Ford, other automobiles in proportion. John Blum, Fourteen Nineteen W. Susquehanna Avenue, Philadelphia.

SAVE your broken battery jars, quickly repaired; also magneto collector rings, distributors, covers and all radio hard rubber parts. By using H. R. Cement. Mailed fifty cents per bottle. Duluth Accessories Mfg. Co., Duluth, Minn.

**MR. ADVERTISER:** Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## FORD ACCESSORIES

**SPEEDSTER** fans—see "Red-i-Kut" ad page 101.

**CYCLO "Dynamic"** provides remarkable solution of hot-spot problem. Cyclo Manifold Co., Chestnut St., Akron, Ohio.

**FORD OWNERS**—Keep your car looking neat and trim. Burnam's Flexible Fender Brace holds fenders in correct position, keeps them from sagging, lessens tire wear. Big money for agents. Send one dollar for sample and particulars. Burnam's Shop, Huntsville, Alabama.

## WANTED

**DETECTIVES**—Excellent opportunity. Fascinating work. Experience unnecessary. Particulars free. Write American Detective System, 1968 Broadway, New York.

**CASH** for old gold, platinum, silver, diamonds, Liberty Bonds, war, thrift, unused postage stamps, false teeth, Magneto Points, jobs, any valuables. Mail in today. Cash sent, return mail. Goods returned in ten days if you're not satisfied. Ohio Smelting Co., 309 Hippodrome Bldg., Cleveland, Ohio.

**WANTED**—Representatives in every factory in the United States. Popular Science Monthly, 225 West 39th Street, New York.

**MR. ADVERTISER:** Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## DUPLICATING SERVICES

**"MODERN"** Duplicators save Time, Labor and Money. Gets Business. Reproduces Typewritten or Penned Letters, Drawings, Lessons, Music, Menus, Bids, Notices, Specifications, Maps or anything in one or more colors. Prints Two per minute. Special Sale On. 30 Days Free Trial. \$2.25 up. Booklet free. J. V. Durkin-Reeves Co., Pittsburgh, Pennsylvania.

## TRADE SCHOOLS

**DENTAL** laboratory work quickly taught through individual instruction. Our graduates in great demand, earn \$1500 to \$6500 yearly. Earn while you learn. Send for Bulletin 4 McCarrick School of Mechanical Dentistry, 34 West Lake Street, Chicago.

**EARN** more money—Learn sign painting, scenic painting, showcard writing, auto painting, paper hanging, decorating, graining, marbling, at Chicago or at your home. Chicago Painting School, 157 West Austin Avenue, Chicago.

## LABORATORY AND CHEMICAL

**YOUR** chemical problem solved and working formula furnished, five dollars. Write me. W. Stedman Richards, Consulting Chemist, Box 2402, Boston, Massachusetts.

**CHEMICAL** pointers (illustrated) for six months and chemical outfit—forty cents. The Wright Laboratory, Caldwell, New Jersey.

**ENTER** soap business, every person uses soap. Manufacture and distribute, small capital at start, utensils and material obtainable anywhere. One person can make two tons per day under this system. A sensible, sound, industry. Complete method \$3.00. Write now. Chester W. Johnson Co., 168 Dartmouth Street, Boston, Massachusetts.

**MR. ADVERTISER:** Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## MANUFACTURING

**WE** manufacture anything, design and build special machinery, develop inventions, build models, make drawings of every description, our facilities the best. Write for booklet. R. G. Clyne Engineering Co., St. Louis, Missouri.

**TO order**—Metal articles, models, tools, patterns, experimenting, manufacturing. Inventions developed. Cleveland Specialty & Manufacturing Co., Searsville Avenue, Cleveland, Ohio.

## ADDING MACHINES

**FREE** trial, marvelous new adding machine. Adds, subtracts, multiplies, divides, automatically. Work equals \$350.00 machine. Price only \$15.00. Speedy, durable, handsome. Five-year guarantee. Used by largest corporations. Write to day for catalog and free trial offer. Lightning Calculator Co., Dept. O, Grand Rapids, Mich.

## BOATS AND LAUNCHES

**MAKE** 16' rowboat—blueprint 30c. Wee-Sho-U Co., 41-8, West Market, Detroit, Michigan.

## DOES IT PAY? These Advertisers Say "Yes."

Every week we receive letters from satisfied and successful advertisers who know that POPULAR SCIENCE MONTHLY PAYS. For that reason they continue to use it month after month, year after year. Their opinions are valuable to us—they should be to you. Why not profit by their experience and put YOUR advertisement where it will do the most good? Here are just a few remarks worth heeding:

"Our advertisement has proven very satisfactory and profitable." Betty Lee, Inc., New York.

"Our advertising in POPULAR SCIENCE MONTHLY has proven out very well indeed." Dodge's Institute, Valparaiso, Indiana.

"We carry several ads in your magazine and the results are satisfactory." C. T. Ludwig Corp., Kansas City, Mo.

"Our little ad in your magazine does its duty each month." Durkin-Reeves & Co., Pittsburgh, Pennsylvania.

There is no better time than now to start your campaign for MORE and BETTER business. 250,000 responsive readers are ready to heed your message if it is worthwhile. Why not start talking to them in the next issue? Forms close on the 5th of each month. Rate 25 Cents a Word—and cheap at that.

Classified Advertising Manager  
POPULAR SCIENCE MONTHLY  
225 West 39th Street  
New York City

## TELEGRAPHY

**TELEGRAPHY**—(Morse and Wireless) and railway accounting taught thoroughly. Big salaries, great opportunities. Oldest, largest school. All expenses low—can earn large part. Catalogue free. Dodge's Institute, Queen Street, Valparaiso, Indiana.

## STAMPING NAMES

**MAKE** \$19.00 hundred stamping names on key checks. Send 25c for sample and instructions. PS Keytag Company, Cohoes, New York.

**QUICK** profits with our Keycheck outfit. Jewell Keycheck Company, Shelby, Ohio.

## FORMULAS

**FREE**—Formula catalog. Laboratories, 4600 Boylston Building, Chicago.

**500 FORMULAS**, resilvering mirrors—renewing dry batteries—10 luminous paints, 25c. Ideal Book Shop, 5501-PP, North Robey, Chicago.

**3000 FORMULAS** and recipes—400 pages, \$1.00. Englewood Book Shop, 7021 D South Winchester, Chicago.

**FORMULA** catalog free. C. A. Lutz, Apartment 241, York, Pennsylvania.

**FORMULAS** of the better sort. Write for our free catalog. National Scientific Laboratories, 641 Main, Richmond, Virginia.

**"OPPORTUNITY KNOCKS,"** formula for radio crystal and new cement. Electrical cement, particulars \$1.00. H. J. Davis, 42 Pine Street, Brooklyn.

**3000 FORMULAS**—368 pages; 85c. Ideal Book Shop, 5501-LP, North Robey, Chicago.

## RADIO SUPPLIES

**ROTOR** balls 50c; wound, with brass stems \$1.00. Variometers, variocouplers. Discounts to dealers. E. U. Mack, Mfr., Florence, South Carolina.

**AMPLIFIER.** Our one stage power tube amplifier when used in addition to the regular two stage amplifier will give surprising results, remarkably free from distortion. Write for descriptive matter of our one, two, and three-stage amplifiers. Central Mfg. Co., Fairfield, Iowa.

**MR. ADVERTISER:** Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## MOTORCYCLES, BICYCLES, SUPPLIES

**DON'T** buy a bicycle motor attachment until you get our catalogue and prices. Shaw Mfg. Co., Dept. 4, Galesburg, Kansas.

**PARTS** for all motorcycles cheap. Schuck Cycle Co., 1922 Westlake, Seattle, Washington.

**USED** and new parts. Indian, Excelsior, Harley, Reading, Thor, Henderson, Yale. Get our price lists. Kingshighway Cycle Co., 1166 North Kingshighway, St. Louis, Missouri.

**LARGEST** stock of new and used motorcycle parts and accessories in the world at your disposal via Uncle Sam's mail. Write for quotations. Motorcycle Parts Mfg. Co., 2030-36 Wabash Avenue, Chicago, Illinois.

## MOTORS, ENGINES, MACHINERY

**PULLEYS**, grooved and motor. Reducing gears. Light transmission machinery. Send for catalog. Winfield H. Smith, Lock Street, Buffalo, New York.

## AMERICAN MADE TOYS

**CASTING** form for making metal warbling bird whistles, \$35.00 complete. H. Smith, 218 Montgomery Street, Trenton, New Jersey.

**MR. ADVERTISER:** Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## AVIATION

**PROPELLERS** for aeroplane propulsion, 5-foot diameters, \$12; 6-foot for Ford, \$15; others in proportion. Motorcycle sketch blueprints, 75c, Ford size, \$1.00. Pictures free. Crawford Motor and Aeroplane, Long Beach, Calif.

**BOYS** build model aeroplane at small cost. Write for circulars. Aero Shop, 3050 Huribut Ave., Detroit, Michigan.

**INVENTORS** desiring information write for our free Illustrated Guide Book and Evidence of Conception Blank. Send model or sketch of invention for our opinion of its patentable nature. Highest references. Prompt service. Reasonable terms. Victor J. Evans & Company, 151 Ninth, Washington, D. C.

## MODELS AND MODEL SUPPLIES

**WE** make working models for inventors and experimental work, and carry a complete stock of brass gears and model supplies. Send for catalogue. The Pierce Model Works, Tinley Park, Illinois.

**MODEL** making and experimental work; modern shop, expert workmen. Manufacturing. Lamson Model and Experimental Works, 625 W. Jackson, Chicago.

**PRACTICAL** model steam engines, boilers, blowlamps, pumps. Send 10c in stamps for a new catalogue. Model Machine Shop Co., 417 East 71st Street, New York City.

**MODEL** steam engines, boilers, boats, model ship and naval fittings, model makers' supplies. Send 20c for new and enlarged illustrated catalogue and handbook. Bathe Mfg. Co., Dept. C, 5214 Woodland Avenue, Philadelphia, Pennsylvania.

## FOR THE HOME


**GRANDFATHER** clock works, \$5.00. Build your own case, instructions free; make good profits selling your friends. Clock works with chimes for old or new cases. Write for full particulars. Clock Co., Nicetown, Pennsylvania.

Quick-Action Advertisements continued on page 8






Public Buildings Are Big Users of Electricity

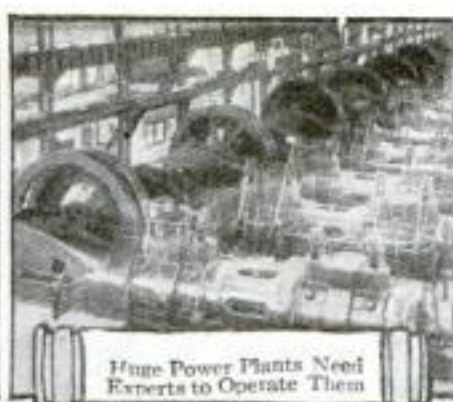

Huge Power Plants Need Experts to Operate Them



Hydro-Electric Plants Being Built Everywhere

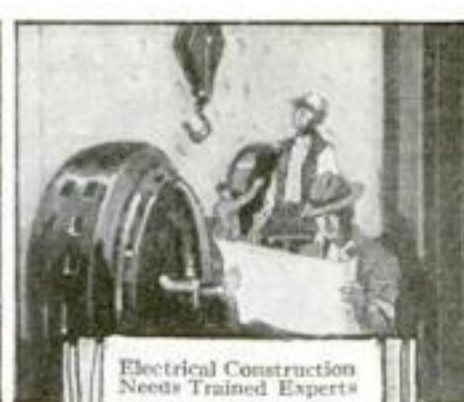


Electrical Construction Needs Trained Experts

# Be a Certificated Electrical Expert Earn \$3500 to \$10000 a Year In This Big Pay Field

**T**RAINED "Electrical Experts" are in great demand at the highest salaries, and the opportunities for advancement and a big success in this line are the greatest ever known.

"Electrical Experts" earn \$70 to \$200 a week. Fit yourself for one of these big paying positions. Big jobs everywhere are waiting for trained men to fill them.

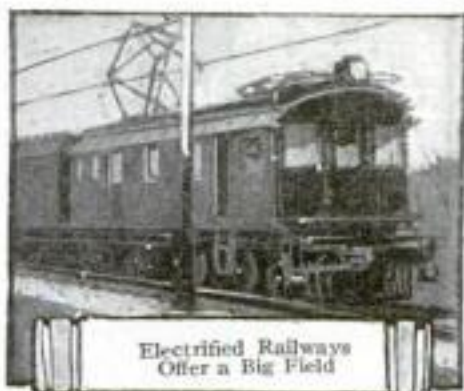

Electrified Railways Offer a Big Field

It is the most simple, thorough, and successful Electrical Course in existence, and offers every man, regardless of age, education, or previous experience, the chance to become, in a very short time, an "Electrical Expert," able to make from \$70 to \$200 a week.

## I Give You a Real Training

As Chief Engineer of the Chicago Engineering Works, I know exactly the kind of training a man needs to get the best positions at the highest salaries. Hundreds of my students are now earning \$3,500 to \$10,000 a year. Many are successful ELECTRICAL CONTRACTORS. Every branch of Electricity is open to you when you have finished my course. My experience as a practical engineer and my most unusual course makes this possible. I even have special lessons for those who want to go into business for themselves.

## Your Satisfaction Guaranteed

So sure am I that you can learn Electricity—so sure am I that after studying with me you, too, can get into the "big money" class in electrical work, that I will guarantee under bond to return every single penny paid me in tuition if, when you have finished my course, you are not satisfied it was the best investment you ever made.

## FREE—Electrical Working Outfit—FREE

I give each student Outfit of Electrical Tools, Materials and Measuring Instru-

ments absolutely FREE. I also furnish them with all supplies, including examination paper, and many other things that other schools don't furnish. You do PRACTICAL work—AT HOME with this Outfit. You start right in after the first few lessons to WORK AT YOUR PROFESSION in a practical way.

## You Owe Yourself the Best Why Not Get It?

To make yourself the big success you want to be—to get the big money and make a name for yourself—you need the best training you can get. Get it right here—Now—Where results are guaranteed.

## Get Started Now—Mail Coupon



Automotive Electrical Men Are Needed

I want to send you the "Vital Facts" of the Electrical Industry, including my Electrical Book, Proof Lessons, and a sample of my guarantee bond all FREE. These cost you nothing and you'll enjoy them. Make the start today for a bright future in Electricity. Send in the coupon—NOW.

**L. L. COOKE, Chief Engineer**  
**Chicago Engineering Works**  
Dept. 38  
2150 Lawrence Ave. Chicago, Ill.

L. L. COOKE, Chief Engineer Chicago Engineering Works.  
Dept. 38, 2150 Lawrence Ave., Chicago, Ill.

Dear Sir:—Send at once the "Vital Facts" containing Sample Lessons, your Big Book, and full particulars of your Free Outfit and Home Study Course—all fully prepaid, without obligation on my part.

Name .....

Address .....

## Learn at Home to Earn \$12.00 to \$30.00 a Day

Today even the ordinary Electrician—the "screw driver" kind—is making money—big money. But it's the trained man—the man who knows the whys and wherefores of Electricity—the "Electrical Expert"—who is picked out to "boss" ordinary Electricians—to boss Big Jobs—the jobs that pay. You, too, can learn to fill one of these jobs—spare time only is needed. Be an "Electrical Expert"—Earn \$70 to \$200 a week.

## Age or Lack of Experience No Drawback

You don't have to be a College Man; you don't have to be a High School graduate. If you can read and write English, my course will make you a big success.

### Some Features of My Course That Make SUCCESS Certain

#### Home Study Training Revolutionized

1. Practical Money-Making Instruction—no useless, high-sounding theory.
2. Free Electrical Outfit—Finest outfit ever sent out for home experiment and practical use.
3. Free Employment Service. (Helps you get a good job.)
4. Free Consulting Service. (No chance to get stuck on anything, while studying or afterward.)
5. Free Engineering Magazine.
6. Free use of my Electrical Laboratory.
7. Extra Courses Free—Radio—Electrical Drafting.
8. Spare Time Work—Special earn-while-you-learn lessons.
9. Reduced prices on all Electrical Supplies.
10. Cash Refund Guarantee Bond.

These features are all explained in my big Free Book.

# The "Cooke" Trained Man is the "Big Pay" Man





# See How Easy It Is To Learn Music This New Way

YOU know how easy it is to put letters together and form words, once you have learned the alphabet. Playing a musical instrument is not very much different. Once you learn the notes, playing melodies on the mandolin, piano or violin is simply a matter of putting the notes together correctly.

The first note shown above is F. Whether you are singing from notes, playing the piano or banjo or any other musical instrument, that note in the first space is always F. The four notes indicated are F, A, C, E, easy to remember, because they spell the word "face." Certain strings on the mandolin, certain keys on the piano, represent these same notes—and once you learn them, playing melodies on the instrument is largely a matter of following the notes.

Anyone can now learn to play a musical instrument at home, without a teacher. A new simplified method of teaching reduces all music to its simplest possible form. You can now master singing, piano-playing, or any musical instrument you wish right at home, quickly, easily, without endless study and practice.

Practice is essential, of course—but it's fun the new way. You'll begin to play melodies almost from the start. The "print and picture" method of self-teaching

is fascinating; it's simply a matter of following one interesting step after another. You learn that the note in the first space is F, and that a certain key on the piano is F. Thereafter you will always be able to read F and play it whenever you see it. Just as you are able to recognize the letters that make a word, you will be able to recognize and play the notes that make a melody. It's easy, interesting.

You don't have to know anything whatever about music to learn to play a musical instrument this new way. You don't have to pin yourself down to regular hours, to regular classes. You practice whenever you can, learn as quickly as you please. All the intricate "mysteries" of music have been reduced to a method of amazing simplicity—each step is made as clear as ABC. Thousands have already learned to play their favorite musical instruments this splendid new quick way.

## You Can Play Your Favorite Instrument Three Months From To-Day

If you are dissatisfied with your present work, let music act as a stepping-stone into a new career. If you long for a hobby, a means of self-expression, let music be the new interest in your life. If you

wish to be a social favorite, if you wish to gain popularity—choose your favorite instrument and, through the wonderful home-study method of the U. S. School of Music, play it three months from to-day.

You can do it. Youngsters of 10 to 12 years have done it, and men as old as 60 have found new interest and enjoyment in learning how to play a musical instrument. You don't have to listen while others entertain any longer. YOU can be the center of attraction, the talented person who holds the audience fascinated.

Is it the piano you wish to play, the mandolin, the violin, the saxophone? Do you want to learn how to sing from notes? Are you eager to be able to play "jazz" on the clarinet, the banjo?

## Free Book Explains New Method

It costs you nothing and obligates you in no way whatever to send for our free book called "Music Lessons in Your Own Home." Everyone who is interested in music should send at once for this valuable book. It not only explains the wonderful new simplified method of learning music, but tells about a special short time offer now being made to music-lovers.

Mail this coupon at once for your copy. Remember, it obligates you in no way whatever—it's free. But act now before the supply is exhausted. U. S. SCHOOL OF MUSIC, 811 Brunswick Building, New York.

## U. S. SCHOOL OF MUSIC

811 Brunswick Bldg., New York City  
Please send your free book, "Music Lessons in Your Own Home," and particulars of your Special Offer. I am interested in the following course:

(Name of Instrument or Course)

Name.....  
(Please Write Plainly)

Address.....

City..... State.....

## LEARN TO PLAY ANY INSTRUMENT

Mandolin	Piano
Drums and Traps	Organ
Harmony and Composition	Violin
Sight Singing	Banjo
Ukulele	Clarinet
Piccolo	Flute
Trombone	Harp
Saxophone	Cornet
Voice and Speech Culture	Cello
Automatic Finger Control	Guitar

## LETTER SPECIALISTS

BETTER business letters: Make busy men take notice. Letters written—processed—mailed. Harvey Letter Service, Brewton, Alabama.

## FOR BOYS

MOUTH-ORGAN Instructor, 25c. Play in one hour. Elsen Publisher, Bowling Green, Ohio.

## ASTROLOGY

MAGIC words! Secret; sure method of obtaining your desires. Postpaid for dime. Smedley, 145 Miller, Brooklyn, New York.

ASTROLOGY revealed—2000 word trial reading, 25c; two questions free. State birth date. Prof. Audrey, Desk P, Box 834, Washington, D. C.

## OFFICE DEVICES

ADDRESSING machines, multigraphs, duplicators, folders, check writers, sealers, dictating machines, at about half new cost. Pruitt, 170-Z North Wells, Chicago.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## MISCELLANEOUS

RAZOR Blade Pocket Knife—Money easy made by selling a handle for an old discarded safety blade. Sample mailed to agents on receipt 25c coin or stamp. A. Tubbs & Company, 66 Plummer, Hammond, Indiana.

MAKE interesting new friends through jolly letter! Send stamp. Betty Lee, Incorporated, 4254 Broadway, New York City.

RUBBER stamps. Your name and address, 20c. Rubber Stamp Shop, Muncie, Indiana.

ALCOHOL book, \$2. Formulae free. Rye, rum flavor, \$2 bottle. Copper kettles. C. Cara, Box 2571, Boston.

STOLEN auto, make this device yourself at home in few minutes, attach to auto and prevent thief. Drawings and instructions for making \$1.00. Tangle Supply Company, Muscatine, Iowa.

## ADVERTISING

PUT your advertising problems up to those who know. As president of the advertising agency of Douglas Wakefield Cutler, Inc., New York, I have conducted campaigns for many of the national advertisers of America. What I have done for others I can do for you. And by doing it in my spare time you'll get maximum results at minimum cost. Letters, folders, booklets, advertisements written and illustrated. Explain your needs in first letter. Reference—R. G. Dun, any magazine or newspaper. Address: Douglas Wakefield Cutler, 906a Park Avenue, Woodcliff, New Jersey.

FREE AD-Guide giving interesting rates for advertising in magazines and weeklies. Concordia Magazine, 2DW, York, Pennsylvania.

ADVERTISE in 24 metropolitan dailies, 25 words, \$15. Helpful Guide listing 1000 publications, 4c stamps. Wade, Baltimore Bldg., Chicago.

INCH Display advertisement, 161 magazines, thrice, \$15.00. Wood's Popular Services, Atlantic City.

ADVERTISING letters, booklets, circulars composed. Quinn, 5404 Lansdowne Avenue, Philadelphia.

ADVERTISE in 100 magazines, 2c word, \$2.00 inch. Western Hills, 2433 Robertson, Cincinnati, Ohio.

## WORK WANTED

PUNCH Press work, tool and die making model, and special machine work wanted. Completely equipped with new machinery of the latest type. Prompt delivery, reasonable prices guaranteed. Quality & Machine Co., Dept. B, 6154-56 N. Clark St., Chicago.

## SCENERY FOR HIRE

SETTINGS for opera, plays, minstrels. Plush drops. Address Amelia Grain, Philadelphia.

## TYPEWRITERS AND SUPPLIES

TYPEWRITERS—all makes, \$15.00 up. Guaranteed five years; one month's free trial. Special proposition to agents. Send for catalogue before purchasing. Typewriter Manufacturers' Exchange, Fordham, New York.

## PRINTING, ENGRAVING, MULTIGRAPHING

LETTERHEADS, envelopes, 500 \$2.65. Samples free. Quality Printery, Marietta, Ohio.

100,000 1 x 2" labels, \$33.00. 3,000, \$2. Save 30%. Wolf Labels, Station E, Philadelphia.

BETTER printing for less money! Send for our large package of samples of hundreds of items every user of printing is interested in. These samples worth dollars will be sent for 10 cents to pay postage. Ernest Fantus Company, 525 South Dearborn Street, Chicago.

EMBOSSED business, personal stationery. Samples, stamp. Daniels P. Company, Pittston, Pennsylvania.

LOWEST prices on advertising. Pencils in quantity. Sample with your Ad imprinted in gold, 10c. S. Mustal & Co., 425 Walnut Street, Yonkers, New York.

500 TWO-COLOR letterheads, \$2.65. Samples free. "Adverpress," Station: C-5, Milwaukee.

500 LETTER heads or envelopes, \$2.00. Royal Printing Company, Post Falls, Idaho.

## POULTRY AND LIVE STOCK

BREED squabs. Book free. C. Rice, Melrose Highlands, 77, Massachusetts.

SPENCER turken—half turkey, half chicken. Photos, booklet, free. Spencer, R. I. Santa Cruz, California.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## Fill a Big Job

**\$150 to \$300 a month in Auto and Tractor Business**

Qualify in 8 weeks in the great shops of Rahe for high paying positions. Through my training Louis Beimer was made Foreman at the age of 24. Hundreds of others have done as well or better.

**Big Jobs Open**—I get calls every day from Garages, Battery Stations, Auto Repair, Welding Shops and other successful firms, for Rahe men. Big concerns need trained men right away and they know where to look for them.

**Railroad Fare and Board FREE**

In order to fill these openings at once I am making an offer no one has ever made before. I cannot hold this open long. I'll tell you about it in my letter. Send for details and Big Free Book on Auto Business. Write before it's too late.

**RAHE AUTO & TRACTOR SCHOOL**  
Dept. 2573 4445 Grand Blvd., Chicago,  
or 9th and Walnut, Cincinnati, O.

## "STAMMERING"

### Its Cause and Cure

You can be quickly cured if you stammer. Send 10 cents, coin or stamps, for 288 page cloth bound book on Stammering and Stuttering. It tells how I cured myself after Stammering and Stuttering for 20 years.

**BENJAMIN N. BOGUE, 687 Bogue Bldg., 1147 N. III St., Indianapolis**

---


## MAKE MONEY AT HOME

**YOU** can earn from \$1 to \$2 an hour in your spare time writing show cards. Quickly and easily learned by our new simple "Instructograph" method. No canvassing or soliciting; we teach you how, guarantee you steady work at home no matter where you live, and pay you cash each week.

Full particulars and Booklet Free.

**AMERICAN SHOW CARD SCHOOL**  
206 Ryrie Building Toronto, Can.



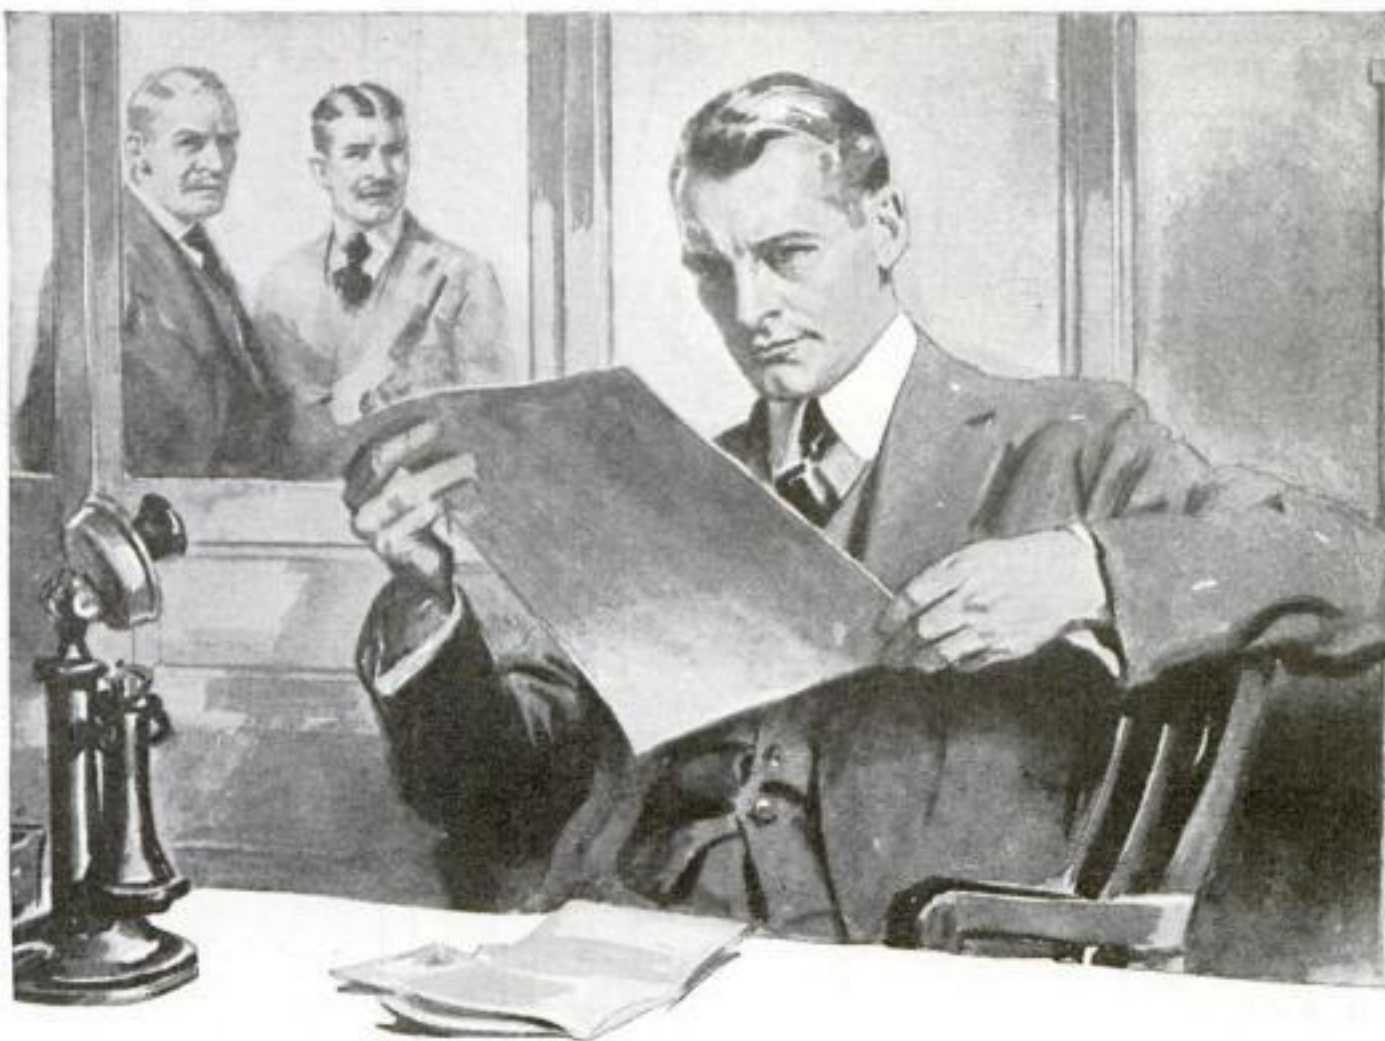

## "We pay him \$100 a week"

**A**ND he's worth every cent of it. Came here several years ago asking for a job. He got just that—a small job at a small salary.

"Then I forgot about him—hardly knew he was on the payroll until one day I got a letter from the International Correspondence Schools telling me that Thomas A. Andrews had enrolled for a course and had received a mark of 98 for his first lesson.

"There's a man worth watching," I said to myself, so I began to keep tabs on his work. Pretty soon he began coming to me with suggestions. I could almost see him growing.

"Somehow he was the first man I thought of whenever there was a position open. And he always made good because he was always preparing himself for the job ahead. We pay him \$100 a week now and he's going to be earning even a larger salary some day. I wish we had more men like him."

**H**OW do you stand when your employer checks up his men for promotion? Does he think of you? Is there really any reason why you should be selected?

Ask yourself these questions fairly. You must face them if you expect advancement and more money. For now, more than ever, the big jobs are going to men with special training.

There is an easy, fascinating way for you to get this special training right at home in spare time. One hour a day, spent with the I. C. S. in the quiet of your own home, will bring you more money, more comforts, more pleasures, all that success means.

**A**N I. C. S. course is not a sure guarantee of a larger salary, but it comes as near to it as anything we know. Certainly the man who studies in his spare time is more certain to get ahead than the man who just drifts along.

Every mail brings letters from I. C. S. students telling of advancements and increased salaries won through spare-time study. In a single year, the increases voluntarily reported by I. C. S. students totaled more than \$2,000,000.

These advancements and increases in salary were not only in the technical subjects such as Electrical, Mechanical and Civil Engineering, Architecture, Chemistry, etc., but in Salesmanship, Advertising, Business Management, Accounting, etc.

Whatever the course, if it is an I. C. S. course, you can be sure it represents the best thought of men who are leaders in that field and is drawn from their practical experience.

Is there any reason why you should stand still while others are proving every day that you can get ahead if you

really want to? Don't you feel that you should at least find out what the I. C. S. can do for you?

**Y**OU can have the position you want in the work you like best—a salary that will give you and your family the home, the comforts, the pleasures you would like them to have. No matter what your age, your occupation, your present education, or your means, you can do it.

Just mark and mail this coupon, and, without cost or obligation, get full particulars telling how you can prepare for success in the work of your choice.

### INTERNATIONAL CORRESPONDENCE SCHOOLS Box 7609-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

#### BUSINESS TRAINING DEPARTMENT

- |   |   |
|---|---|
| <input type="checkbox"/> Business Management                              | <input type="checkbox"/> Salesmanship           |
| <input type="checkbox"/> Industrial Management                            | <input type="checkbox"/> Advertising            |
| <input type="checkbox"/> Personnel Organization                           | <input type="checkbox"/> Better Letters         |
| <input type="checkbox"/> Traffic Management                               | <input type="checkbox"/> Foreign Trade          |
| <input type="checkbox"/> Business Law                                     | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law                          | <input type="checkbox"/> Business English       |
| <input type="checkbox"/> Accountancy (including C.P.A.)                   | <input type="checkbox"/> Civil Service          |
| <input type="checkbox"/> Nicholson Cost Accounting                        | <input type="checkbox"/> Railway Mail Clerk     |
| <input type="checkbox"/> Bookkeeping                                      | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary                                | <input type="checkbox"/> High School Subjects   |
| <input type="checkbox"/> Business Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating           |

#### TECHNICAL AND INDUSTRIAL DEPARTMENT

- |   |  |
|---|--|
| <input type="checkbox"/> Electrical Engineering                           | <input type="checkbox"/> Architect                                   |
| <input type="checkbox"/> Electric Lighting                                | <input type="checkbox"/> Blue Print Reading                          |
| <input type="checkbox"/> Mechanical Engineer                              | <input type="checkbox"/> Contractor and Builder                      |
| <input type="checkbox"/> Mechanical Draftsman                             | <input type="checkbox"/> Architectural Draftsman                     |
| <input type="checkbox"/> Machine Shop Practice                            | <input type="checkbox"/> Concrete Builder                            |
| <input type="checkbox"/> Railroad Positions                               | <input type="checkbox"/> Structural Engineer                         |
| <input type="checkbox"/> Gas Engine Operating                             | <input type="checkbox"/> Chemistry <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Civil Engineer                                   | <input type="checkbox"/> Automobile Work                             |
| <input type="checkbox"/> Surveying and Mapping                            | <input type="checkbox"/> Airplane Engines                            |
| <input type="checkbox"/> Metallurgy                                       | <input type="checkbox"/> Agriculture and Poultry                     |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics                                 |

Name.....

Street Address.....

City..... State.....


Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.



# Let These Guides

# Solve Your Problems

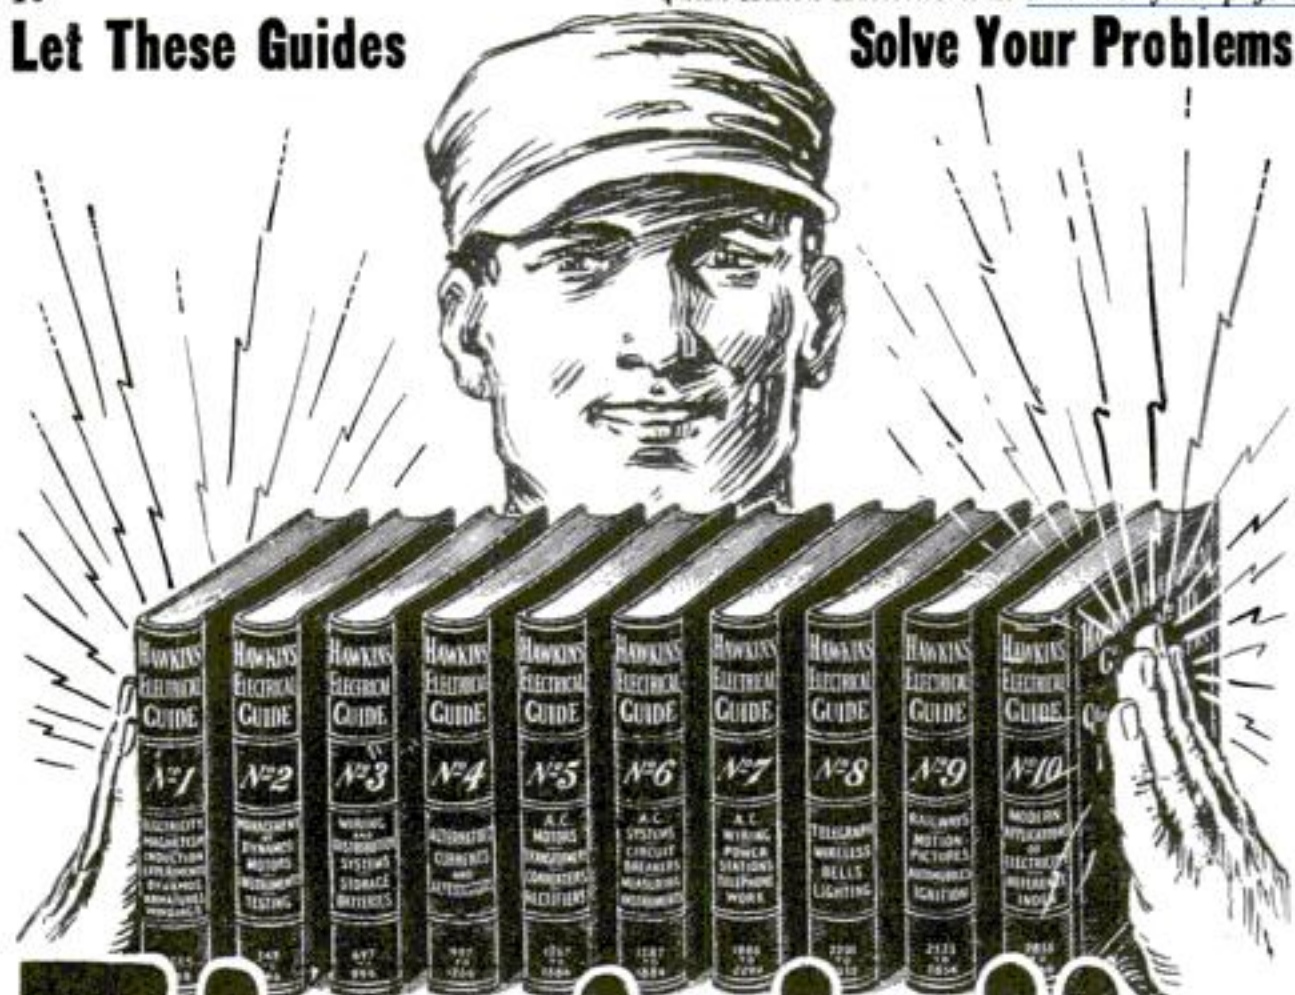

# Electricity at your finger ends

## HAWKINS ELECTRICAL GUIDES

4500 PAGES  
3700 PICTURES

\$1 A VOLUME  
\$2 A MONTH

IN TEN VOLUMES

Send Only This Coupon

Know the facts in Electricity. They mean more money and better position for you. Hawkins Guides tell you all you need to know about Electricity. Every important electrical subject covered so you can understand it. Easy to study and apply. A complete, practical working course in 10 volumes. Books are pocket size; flexible covers. Order a set today to look over.

### LEARN ALL ABOUT

Magnetism—Induction—Experiments—Dynamometers—Electric Machinery—Motors—Armatures—Armature Windings—Installing of Dynamometers—Electrical Instrument Testing—Practical Management of Dynamometers and Motors—Distribution Systems—Wiring—Wiring Diagrams—Sign Flashers—Storage Batteries—Principles of Alternating Currents and Alternators—Alternating Current Motors—Transformers—Converters—Rectifiers—Alternating Current Systems—Circuit Breakers—Measuring Instruments—Switchboards—Wiring—Power Stations—Installing—Telephone—Telegraph—Wireless—Bells—Lighting—Railways. Also many Modern Practical Applications of Electricity and Ready Reference Index of the ten numbers.

### SHIPPED FREE

Not a cent to pay until you see the books. No obligation to buy unless you are satisfied. Send Coupon now—today—and get this great help library and see if it is not worth \$100 to you—you pay \$1.00 a month for ten months or return it.

**LEARN BY DOING**  
Every phase of all branches of

## ELECTRICITY

taught by

### Actual Practice

In America's foremost and oldest institution for trade training.

### No Books Used

Individual Instruction.  
Start Any Day

Write for **FREE 64-page catalog**

## THE NEW YORK ELECTRICAL SCHOOL

40 West 17th St., New York City

# Free to Writers!



**A WONDERFUL BOOK**—read about it! Tells how easily stories and plays are conceived, written, perfected, sold. How many who don't DREAM they can write, suddenly find it out. How the Scenario Kings and the Story Queens live and work. How bright men and women, without any special experience, learn to their own amazement that their simplest ideas may furnish brilliant plots for plays and stories. How one's own imagination may provide an endless gold-mine of ideas that bring happy success and handsome cash royalties. How new writers get their names into print. How to tell if you ARE a writer. How to develop your "story fancy," weave clever word-pictures and unique, thrilling, realistic plots. How your friends may be your worst judges. How to avoid discouragement and the pitfalls of failure. *How to Write!* This surprising book is *absolutely free*. No charge. No obligation. Your copy is waiting for you. Write for it now. Just address **AUTHORS' PRESS, Dept. 300, AUBURN, NEW YORK**

## Keystone Institute

"THE SERVICE SCHOOL"

A fully equipped school with expert instructors, organized to give intensive instruction in

2-Year Courses  
Electrical Engineering  
Mechanical Engineering  
Accounting and Business Administration  
16 weeks' course in Automotive Engineering

Day and Night Classes. Graduates are sought by large and small industrial establishments and are filling important positions in all sections of the country. Write for information on subject that interests you, to Keystone Institute. Address The Information Bureau, 133 North 4th Street, Reading, Penna.

## Popular Science Monthly

DOGS, BIRDS, PETS

DOG owners, amateur or professional. Here is your opportunity. New book "Care of Dogs," free, contains helpful instructive information on feeding, training, diseases. Every dog owner needs it. Book mailed free with a 3 months' trial subscription to Sportsman's Digest—America's popular illustrated Dog and Hunting Magazine. Send 25c to-day (coin or stamps). Sportsman's Digest Publishing Co., 523 Butler Bldg., Cincinnati, Ohio.

### PHONOGRAPHS, RECORDS

**BUILD** your phonograph. Quality phonoparts. Highest quality spring and electric motors, tone arms, reproducers, amplifiers, case material and accessories. Free blue prints and building instructions. Big saving. Wonderful results. New catalog mailed for ten cents. Hoosier Manufacturing & Supply Co., Phonograph Supply Department, 316 Baldwin Block, Indianapolis, Indiana.

AMERICAN phonograph parts are best and lowest priced. Write for catalog today. American Phonograph Co., 3515 North Crawford, Chicago.

### CHALK TALKS

LAUGH producing program, \$1.00. Circulars free. Cartoonist Balda, Oshkosh, Wisconsin.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

### EDUCATIONAL AND INSTRUCTION

USED correspondence school courses only one quarter original price; bargain list 1000 courses free; used courses bought. Students' Exchange, 47A West 42nd Street, New York

BOOKKEEPING in a week. Dukes, 1857-59 Walton Avenue, New York.

DOUBLE entry bookkeeping mastered in 60 hours; guaranteed; diploma. International Bookkeeping Institute, Springfield, Missouri, Desk 10.

LINCOLN-JEFFERSON University. Home study in Academy College, Theological, Law, Music, Pharmacy, Business and Graduate schools, leading to degrees. Box G, 64 W. Randolph Street, Chicago.

USED correspondence courses rented; courses bought; J. J. Henderson, Ridge Avenue, Yonkers, New York.

LEARN Architectural Drafting. Big pay. Opportunities everywhere. Practical, inexpensive instruction. Easy payments. Write now. Designer Evers, Englewood B, Denver, Colorado.

USED correspondence courses bought and sold. Brooks, Bryant Park Building, New York.

VIBRATION and color: What do they mean to you? Interesting literature free. Robert Knox, Box 728, San Francisco, California.

STUDY bacteriology—become a laboratory expert, course interesting, can be mastered in few months at home or in school. Good paying positions open. Degree granted our graduates. School 13 years old. Send for announcement. American College of Bacteriology, 2923 S. Michigan Avenue, Chicago, Illinois.

HYPNOTISM easily learned. Lessons guaranteed. Postpaid \$1.10. Smith Publishing Co., Springfield, Mass.

HIGH school, normal, business, law, engineering and regular collegiate courses thoroughly taught by mail. Special rates. Address Carnegie College, Rogers, Ohio.

CORRESPONDENCE courses. Bargain prices. Bulletin 1064 free. Used courses bought. Instruction Correspondence Exchange, 1906 Broadway, New York.

DEVELOP your psychic powers and become a spirit medium. Instructive lesson free. Address Occult, Box 1331, Tampa, Florida.

BE a successful shorthand writer. New, practical training method; prepares you quickly for expert position. Easy home lessons. Address "Business Methods," 402 Willoughby Building, Chicago.

### LANGUAGES

WORLD-ROMIC system. Masterkey to all languages. Primers, 15 languages, \$1.94 each language: Arabic, Chinese, Danish, Dutch, English, French, German, Italian, Japanese, Panjabi, Polish, Portuguese, Russian, Spanish, Swedish. Pronunciation-tables, 92 languages, 30c each language. Languages Publishing Company, 8 West 40th Street, New York.

### GAMES AND ENTERTAINMENTS

YOU'LL have lots fun exchanging cheery letters in my club. Eva Moore, Box 908, Jacksonville, Florida. (Stamp.)

MAGIC, stage money, books. Catalogs 10c. Gilmagico, Morgan Park, Chicago.

### FOR MEN AND WOMEN

GENUINE Indian baskets and wampum—wholesale. Catalogue. Gilham, Kelseyville, California.

BE a detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Missouri.

"SEXUAL philosophy," 12c. Clear, specific, authoritative, complete, best, satisfies. Fred B. Kaessmann, Lawrence, Massachusetts.

### CIGARS, CIGARETTES, TOBACCO

HOMESPUN smoking tobacco—5 lbs. \$1.00; 10 lbs. \$1.75; 20 lbs. \$3.25. Farmers' Union, Mayfield, Kentucky.

### SPORTING GOODS

LUGER pistols, barrels 4" to 16"; Mauser pistols, long barrels; holster-stocks for both. Super accurate Mauser, Springfield and Mannlicher rifles. Catalogue, ten cents in stamps. Pacific Arms Corporation, San Francisco.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.



# The Magic Power that Enables Men to do the "Impossible"

It Lies Dormant in Everyone. Awake It and You Instantly Release a Great and Entirely Unsuspected Money-Making Power

**W**HILE the whole world held its breath, Blondin, the famous French acrobat, got up from a sick bed, and calmly pushed a wheelbarrow carrying a man over Niagara Falls on a tight-rope. Against the wild protestations of his physicians, he performed a feat that everyone said was "impossible."

Grant, after suffering defeat and humiliation, and confronted with every conceivable obstacle, spent months of apparently hopeless work trying to capture the fortress at Vicksburg. Everything was against him. His efforts were laughed at. It was "impossible" they said. Yet the fortress finally surrendered to him, and he was crowned with glory.

Columbus—alone on the vast expanse of the Atlantic Ocean—surrounded by a gang of murderous mutineers—achieved the "impossible" when he re-kindled confidence in the hearts of his men, made them *eager* to obey him, and sailed on and on until he discovered a New World.

Pizarro, the Spanish adventurer, in his quest of the riches of Peru, was left on the small island of Gallo with but thirteen followers and no provisions. They suffered deprivations and tortures of every kind. The one hope lay in turning back to Panama. But Pizarro, tracing a line in the sand with his sword said, "Friends and comrades, on this side (the South) are toil, hunger, nakedness, the drenching storm, desertion and death; on this side (the North) ease and pleasure. There lies Peru with its riches; here Panama and its poverty. Choose, each man, what best becomes a brave Castilian. For my part, I go to the South—" He stepped across the line and his men followed him—to success.

Wright achieved the "impossible" when he proved that men could fly in the air. Washington achieved the "impossible" when with his handful of ragged, half-starved soldiers he defeated the strong, well-fed British. Joffre, achieved the "impossible" when he stemmed the German onslaught at the Marne. History is filled with similar examples of how men, hopelessly handicapped and in the face of insurmountable obstacles, have gone ahead and accomplished the "impossible."

## The Sleeping Giant Within You

What is the power that lies back of these almost superhuman achievements? Is it something that is possessed only by a few chosen individuals? No. It is a power that lies within you—and within everyone. In most of us, however, it is dormant. It is a sleeping giant, which, when aroused to action can perform deeds that are almost God-like in their wonder. Yet most of us do not even suspect its existence!

The thing that has carried all great men of history to success—the thing that is responsible for every great fortune in the world—the thing that lies back of every great achievement is simply *Will Power*.

In achieving success—in making money—a strong, indomitable Will can do more for you than any faculty you possess.

No matter what circumstances are against you, no matter how "impossible" achievement may now seem—you *can* achieve the success you have always hoped for—you *can* increase your earning power—if you only *WILL* to do so!

The whole thing is ridiculously simple. Take any successful man. Compare him with yourself. You will find that you and he are pretty much the same. Your appearances may differ. Your habits may differ. But fundamentally, you are both very much alike. He has succeeded in a big way—and you haven't. What is the answer?

The true answer—the answer which you *know* to be true, yet which is hard to admit—is that he had the *Will* to push himself ahead and win—and you hadn't. It was hard for you to get started because getting ahead looked "impossible." You were perhaps afraid you wouldn't make good. You were afraid you would get in hot water. And while you were holding back, actually looking for obstacles as an excuse, the successful man, with no more intelligence than you, pushed ahead and won.

Acquire a strong inflexible Will, and nothing will be too big for you. With a strong Will you can brush aside every obstacle and like Grant, Columbus and Pizarro, achieve the "impossible." With a properly trained Will and average intelligence—that is all, just *average* intelligence—you can increase your earnings to a really astonishing degree. You've got to succeed—you *can't* help succeeding.

## This Amazing Power Can Now Be Yours

But, you ask, can one really increase his will power—and if so, does it not mean a long hard period of training? There is a way—a sure, *certain* way—of developing a powerful Will. And instead of being a difficult process, it is fascinatingly interesting. It is through Prof. Frank Channing Haddock's world-famous book "Power of Will." Over three million people, it is estimated, have benefited through the money-making, success-building knowledge contained in this remarkable book. Through it, thousands of men and women have been able to go in business for themselves, and make more money than they ever thought possible. Through it, thousands have doubled—and even trebled—their salaries in an amazingly short time. Salary increases of from \$15 and \$25 a week to over \$200 a week are not at all unusual.

By giving you a dynamic will that nothing can resist, "Power of Will" can change your whole life, just as it has changed the lives of thousands of others. Once you possess a new strong Will, rich opportunities will open up for you. Driving energy you never dreamt you had will manifest itself. You will thrill with a new power. You will have an influence over people that you never thought possible. Success—in whatever form you want it—will come as easily as failure came before. These are only a few things that "Power of Will" can do for you.

## 5 Days' Free Examination

So that you may have an opportunity of seeing and examining this amazing book, the publishers are willing to send it to you entirely at their risk. Without a penny in advance, they will send you, not a pamphlet, but the whole book "Power of Will" itself. Keep it five days. Read it—apply some of its simple teachings. Then if it doesn't prove to you that it can increase your income many times over, simply return it and you will be out nothing.

But if you feel that "Power of Will" can do for you what it has done for thousands of others—if you feel, as they do, that it's the next greatest book to the Bible—send only \$3.00 in full payment. If you pass this opportunity by you may easily be out the difference between what you are now making and an income several times as great. So mail the coupon now—today.

**Pelton Publishing Co.**  
14-T Wilcox Block, Meriden, Conn.



Blondin rose from a sick bed and performed an "impossible" feat over Niagara Falls



Grant achieved the "impossible" at Vicksburg



Columbus surmounted all obstacles and discovered a new world



Pizarro, faced with starvation, mutiny, and death, achieved the "impossible" in conquering Peru



People told Wright it was "impossible" for man to fly in the air

## PELTON PUBLISHING CO.

14-T Wilcox Block,  
Meriden, Conn.

You may send me "Power of Will" at your risk. I agree to remit \$3.00 or return the book to you in five days.

Name.....

Address.....





## A BIG RAISE in SALARY

Is Very Easy to Get, if You Go About It in the Right Way

You have often heard of others who doubled and trebled their salaries in a year's time. You wondered how they did it. Was it a pull? Don't you think it. When a man is hired he gets paid for exactly what he does, there is no sentiment in business. It's preparing for the future and knowing what to do at the right time that doubles and trebles salaries.

### Remember When You Were a Kid

and tried to ride a bike for the very first time? You thought that you would never learn and then—all of a sudden you knew how, and said in surprise: "Why, it's a cinch if you know how." It's the way with most things, and getting a job with big money is no exception to the rule, if you know how.

### WE WILL SHOW YOU HOW

Without loss to you of a single working hour we can show you a sure way to success and big pay. A large number of men in each of the positions listed are enjoying their salaries because of our help—we want to help you. Make check on the coupon against the job you want and we will help you get it. Write or print your name on the coupon and mail it today.

### American School

Dept. G ; 875, Drexel Ave. and 58th St., Chicago

### American School

Dept. G, 875 Drexel Avenue and 58th Street, Chicago

Send me full information on the subject checked and how you will help me win success

- |                              |                               |                            |
|------------------------------|-------------------------------|----------------------------|
| .....Architect               | .....Electrical Engineer      | .....Steam Engineer        |
| .....Building Contractor     | .....Electric Light and Power | .....Foremanship           |
| .....Automobile Engineer     | .....General Education        | .....Sanitary Engineer     |
| .....Automobile Repairman    | .....Vocational Guidance      | .....Surveyor (& Mapping)  |
| .....Civil Engineer          | .....Business Law             | .....Telephone Engineer    |
| .....Structural Engineer     | .....Lawyer                   | .....Telegraph Engineer    |
| .....Business Manager        | .....Machine Shop Practice    | .....High School Graduate  |
| .....Cert. Public Accountant | .....Photoplay Writer         | .....Fire Insurance Expert |
| .....Accountant and Auditor  | .....Mechanical Engineer      | .....Wireless Radio        |
| .....Bookkeeper              | .....Shop Superintendent      | .....Undecided             |
| .....Draftsman and Designer  | .....Employment Manager       |                            |

Name.....

Address.....

## CHEMISTRY

### LEARN AT HOME

Good salaries await trained men. No work is more interesting—no other profession offers greater opportunity for advancement. You can learn quickly and easily at home—in an hour a day of the spare time that now goes to waste. Write today for full particulars.

INTERNATIONAL CORRESPONDENCE SCHOOLS, Box 7612-C, Scranton, Penna.

## LEARN ENGINEERING

Courses, 3 months to 2 years—practical-technical training under experts. Not a Trade School, but a practical-technical college teaching electricity, steam, gas, auto-electric, armature winding, drafting. Extensive laboratory and shop. Degrees awarded. Day and night sessions. Enroll any time.

FINLAY ENGINEERING COLLEGE  
1002 Indiana Ave., Kansas City, Mo.

## WANTED

**Railway Mail Clerks**  
**\$1600 to \$2300 Year**

**MEN—BOYS OVER 16**  
**SHOULD WRITE IMMEDIATELY**

**Steady Work. No Layoffs. Paid Vacations**  
**Common Education Sufficient**  
**Send Coupon Today—SURE**



FRANKLIN INSTITUTE, Dept. J284, Rochester, N. Y.

Sirs: Send me, without charge, (1) Sample Railway Mail Clerk Examination questions; (2) Schedule showing places in all coming U. S. Government examinations; (3) List of many government jobs now obtainable.

Name.....

Address.....

### PHOTOGRAPHY AND SUPPLIES

FILMS developed 5c roll, prints 3c each. Photo Service, 929 McMillan, Cincinnati, Ohio.

SPECIAL trial offer: Any size Kodak film developed for 5c; prints 2c each. Over-night service. Expert work. Roanoke Photo Finishing Co., 212 Bell Ave., Roanoke, Virginia.

HAVE you a camera? Write for free sample of our big magazine, showing how to make better pictures and earn money. American Photography, 156 Camera House, Boston, 17, Massachusetts.

MAKE money with your camera. Booklet free. Lancaster, 115 E. North Main, Los Angeles, Calif.

KODAK prints 3c. Developing 5c. Postcards 5c. Altine Photo Co., Dept. W, 1982 Kinney, Cincinnati, Ohio.

### BOOKS AND PERIODICALS

A WONDERFUL Book Bargain! 12 Beautiful Volumes by 12 Famous Authors—comprising 42 masterpieces of fiction—1176 pages of interesting, educational reading—for only \$2 complete. Think of it! A chance to own the finest writings of such authors as Dumas, DeMaupassant, Kipling, Poe, Stevenson, Dickens, Irving, and others of equal reputation—all for the cost of one novel. Each volume is printed in large type on fine paper, bound in black fibre leather and stamped in gold. Actual size 4 1/4" x 6 1/2". And you get 12 of these handsome volumes for \$2. Order today. Send no money—merely pay the postman when the books arrive. Famous Authors Handy Library, 1a West 34th Street, New York.

SEXOLOGY—Complete catalog of international famous books sent to professionals and advanced adult students. The Book League, Dept. O, 5 Columbus Circle, New York.

BOOKS. All kinds. Lists. Higene's, K2441 Post Street, San Francisco.

SOVEREIGN Company, 40 Broadway, Buffalo. Great 35 courses. "Master key" leather, \$5.00. "Genevieve de Brabant," international novel, \$1.10.

VIBRATIONS—Sounds—lights—colors—radio—cold-lights—Auras illustrated. Stevens Research Laboratories, 242 Powell Street, San Francisco, California.

NEW code book for letter writing, telephone and radio-phone conversations, telegraphy and wireless. Book numbers are on record—no one can get a book like yours. Sold in pairs or any number of the same book to one party, 50c each postpaid. Address Box 140, Pasadena, California.

### AUTHORS—MANUSCRIPTS

WRITE for newspapers and magazines. Big pay. Experience unnecessary, details free. Press Reporting Syndicate, 400, St. Louis.

WRITERS: Have you a song-poem, story, photoplay, to sell? Submit manuscript now to Music Sales Company, 48, St. Louis.

WRITERS: Stories, poems, plays, etc., are wanted for publication. Literary Bureau, 117, Hannibal, Missouri.

FREE to writers—a wonderful little book of money-making hints, suggestions, ideas; the A B C of successful story and play-writing. Absolutely free. Just address Author's Press, Dept. 15, Auburn, New York.

\$\$\$ FOR Ideas. Photoplay plots accepted any form; revised, criticized, copyrighted, marketed. Advice free. Universal Scenario Corporation, 904 Western Mutual Life Bldg., Los Angeles.

### MUSIC AND SHEET MUSIC

SONGWRITERS! Learn of the public's demand for songs suitable for dancing and the opportunities greatly changed conditions offer new writers, obtainable only in our "Songwriter's Manual & Guide," sent free. Submit your ideas for songs at once for free criticism and advice. We revise poems, compose music, secure copyright and facilitate free publication or outright sale of songs. Knickerbocker Studios, 315 Galey Building, New York.

CORNETISTS, trombonists, saxophonists, clarinetists, send for "Free Pointers." Mention instrument. Virtuoso School, Buffalo, New York.

HAVE you poems or melodies? Have wonderful proposition. Ray Hibbeler, D1, 4040 Dickens Avenue, Chicago.

SONG Poems wanted at once. Frank Radner, 6048 Prairie Avenue, Dept. 629, Chicago.

SONG poems wanted. Submit manuscript to New Era Music Co., 114 St. Louis, Missouri.

WRITE the words for a song. We compose music. Submit your poems to us at once. New York Melody Corp., 419 Fitzgerald Bldg., New York.

### MOTION PICTURE BUSINESS

"FILMS cheap—Home projectors \$30; Professional, Projectors—new and used; Stereopticons. Movie Sales High Ridge, Missouri."

WRITE photoplays; \$50 each. Experience unnecessary, details free to beginners. Producers' League, 194, St. Louis.

### REAL ESTATE, FARM LANDS

\$10 to \$50 down! starts you on 20, 40, or 80 acres near a thriving city in Lower Michigan. Balance on long time. Write today for free booklet giving full information. Swigart Land Co., O-1251 First Nat'l Bank Bldg., Chicago.

WANT to hear from owner having farm for sale; give particulars and lowest price. John J. Black, 174th Street, Chippewa Falls, Wisconsin.

### FOR INVENTORS

THE G. & G. Manufacturing Company, 3116 Spring Grove Avenue, Dept. A, Cincinnati, Ohio. Special machinery, models, dies, patterns, tools, metal stampings, gears, contract manufacturing.

900 mechanical movements, also illustrations explaining 50 perpetual motions. My book, "Inventor's Universal Educator," fifth edition, tells how to procure and sell patents. Government and other costs. Covers the matter from A to Z. 160 pages elegantly bound. Mechanical Movements greatly assist inventors—suggest new ideas that may prove of great aid in perfecting inventions. Tells how to select an attorney. Has valuable information regarding patent sharks, selling agents and brokers. Price \$2. Postage free everywhere. Money back if not satisfactory. Explanatory circular free. Fred G. Dieterich, 681 Ouray Building, Washington, D. C.

PATENTS—Write for free Guide Book and Evidence of Conception Blank. Send model or sketch of invention for free opinion of its patentable nature. Highest references. Reasonable terms. Victor J. Evans & Company, 156 Ninth, Washington, D. C.

PATENTS—Send for free book. Contains valuable information for inventors. Send sketch of your invention for free opinion of its patentable nature. Prompt service. (Twenty years' experience.) Talbert & Talbert, 436 Talbert Bldg., Washington, D. C.

SELL patents. Established in 1900. Charles A. Scott, 773PS, Garson Avenue, Rochester, New York.

GET patents yourself. Complete instructions, \$1. Cooper Cutting, Campbell, California.

INVENTIONS wanted. Cash or royalty for ideas. Adam Fisher Mfg. Co., 183 St. Louis, Missouri.

PATENTS—My fees in installments. Advice book free. Frank Fuller, Washington, D. C.



# LEARN WIRELESS By Practice at Home

## Our Wonderful Outfit Makes It Easy Gentleman's Work with Big Pay

**T**HOUSANDS of Radio experts are needed to fill splendid big-pay positions waiting. Do you want to be ready to jump into one of these big, easy jobs in a few short months? Why not? All you need to start with is a common school education. You can travel or stay at home. Radio provides you with valuable training and gives you a profession that will enable you to find a good-pay position no matter where you go. And besides as a Radio man on a ship you can save big money right from the start. It is nothing unusual for Radio men to save over \$1,000 the first year they work. That's because they get food and quarters absolutely free. They work only a few hours a day and the rest of the time is their own—to do with as they like. Many men then train themselves for the high positions of Radio Engineers and Executives, paying up to \$10,000 a year. You can start at a fine salary, with all your expenses paid. Can you save \$85 or \$95 a month in the job you have now? That's what you save as an operator—and in no other position can you **SAVE ALL YOU MAKE?**

**WE  
SUPPLY  
ENTIRE  
OUTFIT**

If you want to work on land there is plenty of room for you. Every commercial and broadcasting station has a force of men as operators, aids, mechanics, repairmen, installation and maintenance experts, inspectors, engineers, clerks, etc., etc. Newspapers pay big money to men who can write their Radio sections. Banks, Stock Exchanges, Police Departments, Schools—wherever Radio has taken its place, have splendid opportunities waiting for competent, trained Radio men.

### Lots of Pleasure While You Learn

The Radio era is upon us. Radio is everywhere—in department stores, big factories, banks, schools—everywhere! One million people are listening every night to music, vaudeville, speeches broadcasted by Radio. You can get all this fun while you are learning our course. *This entertainment is actually practice.* As a part of our amazingly complete course we give you four wonderful Radio instruments. One of them is the Narola Radio receiving set. You make the parts, erect the aerial, and then listen to all the news and entertainment of the world sent to you through the air! Think of sitting in your home, and getting all this fun, for just a few minutes' work, that eventually fits you for a big-pay position in this great industry.

The other instruments which are loaned to you free give you actual practice in real Radio work. Among them is the famous Natrometer, the only device ever invented that gives you an exact reproduction of the transmission of Radio work by two Trans-Atlantic professional Radio operators. These instruments are the four steps

You learn Radio at home by actual practice on four wonderful, patented instruments that have helped all our graduates to better-paying positions.



The Natrometer is only one of the "automatic Teachers" furnished with our course. You learn at home by the aid of these Four Wonderful Inventions that have helped eight thousand other men to better-paying positions.

## NATIONAL RADIO INSTITUTE

1345 Pennsylvania Ave., N. W.

Dept. L-12

Washington, D. C.

to a fine position in Radio with its big-pay and wonderful future. Nothing could be more fascinating than Radio. No dirty hands, scarred fingers, or aching back. You won't have to worry about dull times, strikes, lockouts, layoffs, because the Radio field is growing so fast that the jobs are looking for the men.

### Personal Instruction by Radio Experts Qualifies You in Spare Time at Home

In 1914, barely three years after Marconi made his marvelous discoveries of Radio, the National Radio Institute was founded—the first Radio School in America. Since that time we have taught over 10,000 students, more than all other Radio Schools combined, and we are to-day the largest Government-recognized Radio School in the country. Our method of training by mail is endorsed by government officials; our school is officially recognized and stands first on the list of schools recommended by the Department of Commerce. Our Diploma of Graduation is given five to ten credits at all Government Commercial License examinations.

We have made Radio as interesting as a fascinating romance. Prominent Radio men, who are nationally known as experts, inventors, operators, give you personal instruction in every branch and phase of the subject. They give you advice you want, answer your questions, help you in every way to become a successful Radio expert. And then, don't forget the Four Radio Instruments (which are loaned to you free) that makes our course so practical and so thorough. You can easily learn in four months. Ernest Bostwick finished his course in ten weeks. Soon you will be ready to step into a real job. Thousands have found it easy. You can too.

### Four New Inventions Make Radio Easy to Learn by Practice at Home

With our famous short-cut course in Radio Telegraphy and Radio Telephony you are furnished with our four patented Radio Practice Instruments by which you actually learn by doing.

1. The Code-o-meter which teaches you how to send code quickly.
2. The Rec-o-meter which makes the most difficult part of Radio fascinatingly easy.
3. The Narola Receiving Set which you make yourself, and gives you practice in taking real messages from the air, and lets you in on the glorious entertainment broadcasted every day.
4. The Wonderful Natrometer, the only device ever patented which gives you an exact reproduction of the transmission of two famous Trans-Atlantic commercial operators. With this instrument you learn in less than the usual time how to send and receive Radio messages with the accuracy, precision and speed of a professional operator.

### FREE—This Interesting Big Book on Radio

If you are genuinely and sincerely interested in making Radio your Life's profession, send for our big, free illustrated book, "How to Learn Radio at Home," which gives complete details of our wonderful home-study course, the four instruments which we give you free, the splendid positions open in Radio, the fine salaries paid, and how you can qualify for the position you want in your spare time at home. Fill in the coupon and mail it AT ONCE!



National Radio Institute, Dept. L-12  
Washington, D. C.

Send me your free, illustrated book, "How to Learn Radio at Home," which gives full details of your short-cut course in Radio Telegraphy and Radio Telephony, the four Radio Instruments you lend free, and how your course qualifies me quickly in spare time at home for a First Class Commercial License and a fine position in Radio.

Name..... Age.....

Address.....

City..... State.....



# Service

"I had six honest, serving men;  
(They taught me all I knew):  
Their names are WHAT and WHY and WHEN,  
and HOW and WHERE and WHO."

WHAT was the Declaration of London?

WHAT are consols?

WHY does the date for Easter vary  
from year to year?

WHEN and by whom was the great  
pyramid of Cheops built?

HOW can you distinguish a malarial  
mosquito?

WHERE is Canberra? Zeebrugge?  
Delhi?

WHO was Mother Bunch? Millboy  
of the Slashes?

Are these "six men" serving you too?

Give them an opportunity

by placing

## WEBSTER'S NEW INTERNATIONAL DICTIONARY



in your home, office, school, club, shop, library. This "Supreme Authority" in all knowledge offers service, immediate, constant, lasting, trustworthy. Answers all kinds of questions. A century of developing, enlarging, and perfecting under exacting care and highest scholarship insures accuracy, completeness, compactness, authority.

The name Merriam on Webster's Dictionaries has a like significance to that of the government's mark on a coin. The New International is the final authority for the Supreme Courts and the Government Printing Office at Washington.

Write for a sample page of the New Words, specimen of Regular and India Papers, also booklet "You are the Jury," prices, etc. To those naming this magazine we will send free a set of Pocket Maps.

G. & C. MERRIAM COMPANY  
Springfield, Mass., U. S. A.

Established 1831

Name .....

Address .....

P. S. M.

### FOR INVENTORS

**PATENTS**—Protect your rights. Before disclosing invention write for booklet and blank form Evidence of Conception to be signed, witnessed and returned with rough sketch or model of your idea, upon receipt of which, I will promptly give opinion of patentable nature and instructions. No charge for preliminary advice. Highest references. Prompt, personal attention. Clarence P. O'Brien, Registered Patent Lawyer, Southern Building, Washington, D. C.

**WILL** buy outright or manufacture on royalty articles to be made of glass. E. A. Babcock Co., P. O. Box 935, Charleston, West Virginia.

### PATENT ATTORNEYS

**PATENTS**, trade marks, copyrights. Prompt, personal, reliable service. Over 30 years' active practice. Write for terms. Book free. Address E. G. Siggers, Box 1, N. U. Building, Washington, D. C.

**PATENTS**—Send for free book. Contains valuable information for inventors. Send sketch of your invention for free opinion of its patentable nature. Prompt service. (Twenty years' experience.) Talbert & Talbert, 452 Talbert Bldg., Washington, D. C.

**PATENTS**. Booklet free. Highest references. Best results. Promptness assured. Watson E. Coleman, Patent Lawyer, 624 F Street, Washington, D. C.

**PATENTS**—Write for free illustrated Guide Book and Evidence of Conception Blank. Send model or sketch of invention for free opinion of its patentable nature. Highest references. Prompt attention. Reasonable terms. Victor J. Evans & Company, 155 Ninth, Washington, D. C.

**LACEY Patent-Sense**. "The book the inventor keeps." Free. See page 114.

**ROBB, ROBB & HILL** offer a strictly professional service to manufacturers and inventors in patenting inventions and registering trade-marks, a service which is the result of twenty years' experience. Write for free booklet and names of prominent manufacturers and inventors represented by us. Send sketch for preliminary advice. 840 McLachlen Building, Washington, D. C., 1336 Hanna Building, Cleveland.

**PATENTS** promptly procured. Personal, careful and efficient service. Highest references. Moderate fees. Send sketch or model for actual search and advice. George P. Kimmel, Master of Patent Law, 38N, Loan and Trust Bldg., Washington, D. C.

"**INVENTOR'S Guide**" free on request; gives valuable information and advice. Frank Ledermann, 15 Park Row, New York.

**PATENT**, trade-mark and copyright specialist. Write at once for free Duplex Conception Form. Personal service. M. E. Jones, lawyer, 509b 7th Street, Washington, D. C.

**PATENTS**. Trademarks. Moderate fees. Easy payments. Eugene Stevens, Jr., Washington, D. C.

**BEFORE** or after filing an application for patent on your invention it will pay you to read over my "Inventor's Adviser No. 1," which may be obtained free of charge. M. Labiner, Registered Patent Attorney, No. 3 Park Row, New York City.

U. S. and foreign patents procured, validity reports, infringement suits, experting, over forty years actual experience. If you have a new invention which you wish to patent, you can write to us fully and freely for advice in regard to the best way of obtaining protection, how to proceed, etc. Fred G. Dieterich & Co., Patents and Patent Causes, 690 Ouray Building, Opposite U. S. Patent Office, Washington, D. C.

**INVENTORS** aided. Ideas developed and patented. Practice in all courts and departments. C. E. Richardson, 28-Albee Building, Washington, D. C.

**PATENTS**—Protect your rights. Before disclosing invention write for booklet and blank form Evidence of Conception to be signed, witnessed and returned with rough sketch or model of your idea, upon receipt of which I will promptly give opinion of patentable nature and instructions. No charge for preliminary advice. Highest references. Prompt, personal attention. Clarence P. O'Brien, Registered Patent Lawyer, Southern Building, Washington, D. C.

**PROTECT** your rights—Write for "Record of Invention," and booklet about Patents. Prompt personal service. Advice without charge. J. Reaney Kelly, 612-P Columbian Building, Washington, D. C.

**INVENTORS**: Send sketch or model of invention for opinion concerning patentable nature and exact cost of patent. Book, "How to Obtain a Patent," sent free. Tells what every inventor should know. Established twenty-eight years. Highest references, prompt service, reasonable charges. Chandler & Chandler, 440 Seventh, Washington, D. C.

**PATENTS**, trade-marks—30 years of confidential service; expert advice, prompt action, reasonable fees. Send for free Book No. 63, Edgar Tate & Co., 245 Broadway, New York, 635 F St., N. W., Washington, D. C.

**MONROE MILLER**, Ouray Building, Washington, D. C. Patent Attorney, mechanical and electrical expert. Best quality of work and results. Moderate charges.

**INVENTORS**—Send for form "Evidence of Conception" to be signed and witnessed. Form, fee schedule, information free. Lancaster and Allwine, 232 Ouray Building, Washington, D. C.

**PATENTS** procured—trade marks registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 44 Owen Building, Washington, D. C., or 2276-Z Woolworth Building, New York.

**PATENTS**—Trademarks. Thirty-five years' experience. Send model or sketch for opinion as to patentability. Free "Inventors Guide." Highest references and personal attention assure best results. Franklin H. Hough, 530 Washington Loan & Trust Bldg., Washington, D. C.

**PATENTS**, trade marks, designs and copyrights. Registered firm of attorneys-at-law. Careful, prompt, personal service assured. Moderate fees. Full information free upon request. Gross & Collings, 610 Ouray Building, Washington, D. C.

**INVENTIONS** patented. Trade-marks registered. Reasonable charges, prompt service, plain advice. Request detailed information. Jaynes & Jaynes, 710 Kellogg, Washington, D. C.

**MILLIONS** spent annually for ideas! Hundreds now wanted! Patent yours and profit! Write today for free books—tell how to protect yourself, how to invent, ideas wanted, how we help you sell, etc. American Industries, Inc., 501 Patent Dept., Washington, D. C.

**PATENT** applications filed on partial payment plan. Trade-marks, copyrights, etc. Milo B. Stevens & Co., 640 F Street, Washington, D. C. Established 1864.

**EXACT** expenses quoted in advance. Moderate charges. No extras. Applications satisfactorily prepared or money returned. Submit data. Lynwood B. James, 892 McGill Building, Washington, D. C. Established 1913.



## Be Master of a Real Job

Then you can walk confidently into the office or the plant, knowing that you are needed and appreciated—that there is a growing future ahead, one that holds more power, better pay, bigger leadership.

You won't have to "cool your heels" in waiting rooms looking anxiously for a job at "almost anything," which is what men usually say when they are not masters of their work.

### Good Advice from One Who Climbed.

R. H. McElroy, one of the vice-presidents of the Standard Oil Company, who climbed to a \$30,000 salary from a clerical position, says—(N. Y. Times, July 2, 1922): "Any young man who has the right stuff in him, who is willing to work at his job and study after working hours, who will keep his eyes open . . . can achieve the same success that I and my associates have." In a letter to us, Mr. McElroy adds: "I believe the correspondence and evening schools provide a splendid opportunity for the young man of limited time and means to prepare himself for a brilliant future."

After a quarter-century of experience in aiding men through spare hours to become their Bigger Selves, the United Y. M. C. A. Schools offer their tested service by mail, so that, wherever you may be, whatever you may need or whatever your hours of employment are, you can now get this valuable aid.

Mark and mail the coupon for free copy of our new catalog, and our friendly counsel.

### Some of our 300 Correspondence Courses

Business Courses	Technical and Other Courses
Accountancy	Agricultural Courses
Advertising	Applied Psychology
Banking	Architecture
Better Letters	Automobile Courses
Bookkeeping	Building Construction
Business Arithmetic	Civil Engineering Courses
Business Administration	Drafting Courses
Business English	Electrical Courses
Business Finance	English Courses
	Factory Management
	Foreign Languages
	Foremanship
	Highway Engineering
	High School Subjects
	Illustrating
	Insurance Courses
	Mathematical Courses
	Mechanical Engineering
	Own-Your-Home Course
	Plan Reading
	Plumbing
	Poultry Husbandry
	Radio Engineering
	Radio Telegraphy
	Radio Telephony for Amateurs
	Steam Engineering Courses
	Structural Drafting
	Surveying
	Use of the Slide Rule
	Vocational Courses

Are you an ex-service man?



## Correspondence Instruction

375 Lexington Avenue  
New York City

Dept. 8-N

Without obligating me, please advise regarding the course in

Name .....

Full Address .....

(Please write plainly.)



Learn to Write

Begin Today—Write for My FREE BOOK  
I can make a good penman of you at home during spare time. Write for my FREE BOOK, "HOW TO BECOME A GOOD PENMAN." It contains specimens and tells how others mastered penmanship by the Tamblin System. Your name will be elegantly written on a card if you enclose stamp to pay postage. FREE BOOK—Write for it today.

F. W. Tamblin, 437 Ridge Bldg., Kansas City, U. S. A.

## BIG PROFITS FROM POULTRY

We Teach You How; Easily Learned at Home;

our guaranteed methods make success certain; write for free book, "How to Raise Poultry for Profit," Free. Don't delay; write today.

The National Poultry Institute, Inc., Dept. 313L, Washington, D. C.



## AGENTS AND SALESMEN WANTED

**FREE** sample "Rain Shield Wiper"—Retail \$1; cost you 25c; 300% profit. Invention just out. Sold on Clear and Rainy Days. Every automobilist buys quickly. No cloth. No paste. No mechanical attachment. One rub keeps windshields clear forty-eight hours against rain, snow storms. Prevents accidents. Riley made \$108 three days. Stocom makes \$10 hour. Experience unnecessary. Wonderful pocket sideline. Write quickly for your Free Sample. Nullie Corporation, Hartford, Connecticut.

**GET** our plan for monogramming automobiles, trucks, hand luggage and all similar articles by transfer method; experience unnecessary; exceptional profits. Motorists' Accessories Company, Mansfield, Ohio.

**MAN** in each town to refinish chandeliers, brass beds, automobiles, by new method. \$10 daily without capital or experience. Write Gunmetal Company, Avenue "F," Decatur, Illinois.

**AGENTS** make 500% profit handling auto monograms, new pictures, window letters, transfer flags, novelty signs. Catalog free. Hinton Co., Dept. 125, Star City, Indiana.

**AGENTS**—Make a dollar an hour. Sell Mendota, a patent patch for instantly mending leaks in all utensils. Sample package free. Collette Mfg. Company, Dept. 467, Amsterdam, New York.

**AGENTS**—\$85.00 weekly is a small income if you sell the Eridium (Luminous) Crucifix. Every Catholic will buy for \$2.00. Costs 84c. Your profit 140%. Demonstrating case free. All homes can use luminous switch plates, bulbs, and house numbers. Quick easy sales that bring big money. The Pioneer Corporation, 6307 Yale Avenue, Chicago.

**SALESMEN** can make \$5.00 a day selling our calendars, pencils, signs, advertising novelties, yardsticks, whistles, etc. Liberal terms. Sells entire year. Fine side line. Local and traveling agencies. Model Calendar Co., Dept. 309, South Bend, Indiana.

**PATENTS.** Write for free Illustrated Guide Book. Send sketch or model for free opinion of its patentable nature. Highest references. Prompt attention. Reasonable terms. Victor J. Evans & Co., 174 Ninth, Washington, D. C.

**AGENTS:** Big profits. Best and cheapest window letters made. Easily applied. Dime brings five samples. Particulars free. Stalbrite Company, 1115 Second Avenue, New York.

**AGENTS**—375% profit. Wonderful little article; something new; sells like wildfire. Carry in pocket. Sample 15c. Peters Mail Order House, 12 Harrison Avenue, Gardiner Maine.

**MEN** only. Sell new novelty. Sample 25 cents. Howard Eddy, Meriden, Connecticut.

**YOU** are worth more money—Let B & G Rubber Specialties get it for you. Forty-five fast sellers needed in every home. Profits extra large. Get right write now. B & G Rubber Mfg. Co., Dept. 499, 618 Penn Ave., Pittsburgh, Pennsylvania.

**EVERYBODY** uses extracts. Sell Duo Double Strength Extracts. Complete line household necessities. Big repeaters. Write today. Duo Co., Dept. E66, Attica, N. Y.

**MEN'S** shirts, easy to sell. Big demand everywhere. Make \$15.00 daily. Undersell stores. Complete line. Free samples to workers. Chicago Shirt Co., 9 South Clinton, Factory 220, Chicago.

**\$5 TO \$15** daily easy—Your pay in advance, introducing New Style Guaranteed Hosiery. Must wear or replaced free. No capital or experience required. Just show samples, write orders. We Deliver and Collect. Elegant outfit furnished—all colors and grades including silks and heathers. Mac-O-Chee Mills Company, Desk 2611, Cincinnati, Ohio.

**GREAT** profits assured capable men joining immediately national selling organization for Everflo Self-Filling Ink-Pencil Pen. Writes with ink instead of lead. Send for profit proposition. Everflo Pen Co., Dept. 55, Grand Rapids, Michigan.

**\$25.00** will be paid first person proving one-quart C-M-G. does not equal forty to sixty gallon gasoline. Quart \$2.50. Combination Motor Gas Company, 323 1st Avenue, Milwaukee, Wisconsin.

**MONEY** back guarantee makes Premier Sharpener fastest seller. Hundreds getting rich. You can. Write Premier Mfg. Co., 815 E. Grand Blvd., Detroit, Michigan.

**AGENTS:** We pay \$9 a day taking orders for 300 candle-power coal-oil lanterns. Get orders from farmers, dairymen, hucksters, gardeners, contractors. Auto furnished to travel in. Write for particulars. Thomas Mfg. Co. Class 2961, Dayton, Ohio.

**ALEXANDER** Publicity Motion Pictures are rented to 50 lines of business. They are short and snappy. They combine all the features of good advertising: known circulation, undivided attention, low price, front page position, skillful actors, constant change of copy. 35 states now served. More hustling district managers and salesmen wanted. Service sold repeatedly to same advertisers. \$25,000 per year is the present known limit of earnings. A postal or wire will bring the details to high-grade men. Alexander Film Company, 1141 Main, Spokane, Washington.

**LIGHTNING**—Strange battery compound startles the world. Better than sulphuric acid. Charges discharged batteries instantly. Gallon free to agents. Lightning Co., St. Paul, Minnesota.

**WE** start you without a dollar. Soaps, extracts, perfumes, toilet goods. Experience unnecessary. Carnation Co., Dept. 21, St. Louis.

**AGENTS**—Steady income. Large manufacturer of handkerchiefs and dress goods, etc., wishes representative in each locality. Factory to consumer. Big profits, honest goods. Whole or spare time. Credit given. Send for particulars. Freeport Mfg. Co., 24 Main Street, Brooklyn, New York.

**AGENTS**—Signs of all kinds. Big money making line. Price right. Attracto Sign Works, P. Cicero, P. O., Chicago.

**NO** Dull Times Selling Food—people must eat. Federal distributors make big money; \$3,000 yearly and up; no capital or experience needed; guaranteed sales; unsold goods may be returned. Your name on packages builds your own business. Free samples to customers—repeat orders sure. Exclusive territory. Ask Now! Federal Pure Food Co., Dept. 58, Chicago.

**TERRITORIAL** and local salesmen. Climax Oil Burners hottest residence furnace burners made. Scientific principles prevent smoke and soot, side line success, big demand. E. L. Miller Mfg. Company, 2224 West Third, Kansas City.

**MAKE** \$5000 every year—\$2000 in spare time. You share profits besides. Show "Weather Monarch" Raincoats and Waterproofed Overcoats. Ask about "Duol Coat" (No. 999). Free raincoat for your own use. Associated Raincoat Agents, Inc., M444 North Wells, Chicago.

**AGENTS**—\$15 a day—Easy, quick sales—Free auto—Big weekly bonus—\$1.50 premium free to every customer. Simply show our beautiful 7-piece, solid aluminum handle cutlery set. Appeals instantly. We deliver and collect. Pay daily. New Era Mfg. Co., 803 Madison Street, Dept. 41B, Chicago.

**57 MILES** per gallon made with new patented gasoline vaporizer. Write for particulars. Vaporizer Company, Pukwana, South Dakota.

# MEN WANTED

## write today to the SWEENEY SCHOOL



**NOW** I will guarantee a real job to qualified SWEENEY Graduates. Learn the Auto and Tractor business. Learn a trade. Eight weeks' course leads to employment. Free Railway Fare to Kansas City. Wonderful offer to you from World Famous Million-Dollar Trade School. **FREE RADIO COURSE.**

Young man, the only difference between a rut and the grave is that the grave is deeper. I say, get out of the rut. Do the work you like. Be independent. Learn a trade. Be a mechanic. Get into the auto business. You can earn big money. You can travel and see the world.

I have helped 50,000 men to success. This Million-Dollar trade school is the greatest success factory you ever saw. The way to learn is easy. You don't need any experience. I teach with tools not books. You learn your trade by actually doing the work.

You have a right to make a success of your life. Make a start now. I'd like to show you what thousands of men just in your position have done as a result of the Sweeney system of practical instruction. It's a shame for you to stick in a rut or work at jobs you don't really like.

**FREE** Simply send name today for my big 72-page catalog. Shows hundreds of pictures of men at work in the schools. Tells all about wages, profits, opportunities in auto and tractor business. Explains step by step how you learn. Interesting letters from graduates telling how they made good. Shows how men come from all over the world to this big school. Makes you want to join the crowd. Tells everything you want to know about, including all the new radio details. Includes contract for employment. No cost, no obligation. Clip the coupon or a postcard will do. Get the catalog now—that's the first step. Don't put it off one minute. No colored students accepted.

**E. J. SWEENEY,**  
President.

**LEARN A TRADE**  
**Sweeney**  
SCHOOL OF AUTO-TRACTOR-AVIATION  
1064 SWEENEY BLDG KANSAS CITY, MO.

### PRACTICAL AMATEUR WIRELESS STATIONS

This book contains best suggestions of thirty-three experimenters on building, installing and operating experimental stations for radio communication.

Profusely illustrated. 136pp. Price 75c

**POPULAR SCIENCE MONTHLY**

225 West 39th Street. New York City, N. Y.

**A FILE**

**Stop Forgetting**

Make Your Mind an Index from which you select facts, figures, names, faces. Develop concentration, self-control; overcome bashfulness, forgetfulness. Write today for FREE memory and concentration test and illustrated booklet, "How to Remember."

**PROF. HENRY DICKSON**  
Dept. 929 Evanston, Ill.

**NOT A FILE**

### "HOW I BEAT THE GAME"

The Inspiring Story of how one poorly paid garage mechanic won success, his own business and a big income. Tells how you can increase your salary from 100 to 500%. Send for it today **FREE.**

**Ambu Engineering Institute**

Dept. 410 2632 Prairie Ave., Chicago, Ill.

Ask any Sweeney man. They are in good positions all over the country. Repairing and selling autos. Driving cars and trucks. Mechanics. Running garages, tire shops, battery shops. Welders. Handling radio supplies.

Learning is a real pleasure in the Sweeney School. World's finest equipment. Fine associates. Healthful surroundings. Entertainment after working hours. Instructors who take personal interest in you. Free radio course. Big radio broadcasting station. Call W. H. B.

I am now paying your Railroad fare to Kansas City and giving a free radio course. No extras. No books. You are sure of getting a job when you graduate. I can't tell it all here, but send for my big catalog. Investigate this real opportunity

*The Million Dollar*  
**Sweeney**  
**AUTOMOBILE**  
**(and) TRACTOR**  
**SCHOOL**

Largest in the World

E. J. Sweeney,  
President,  
Dept. 1064  
Sweeney Bldg.,  
Kansas City, Mo.

Send me Free Catalog  
and Your Guaranteed  
Job Offer.

Name.....

Address.....

### THE STANDARD RADIO GUIDE

Clear directions for making an excellent radio receiving set. Also for assembling and adjusting a set. Adequately illustrated. Price 50 cents.

**POPULAR SCIENCE MONTHLY**

225 West 39th Street New York City

### Learn Cartooning

At Home—in Your Spare Time

From the school that has trained so many of the successful cartoonists of today earning from \$50 to \$200 and more per week. The Landon Picture Chart Method of teaching makes original drawing easy to learn. Write for full information and chart to test your ability. Please state age.

**THE LANDON SCHOOL**

451 National Bldg., Cleveland, O.

**FREE**

**HERE'S MORE MONEY FOR YOU**

**150 Home-Study Books**

Each of these sure pay-raising self-help books is a complete course of instruction. They cover Electricity, Automobile, Machine Shop, Carpentry, Painting, Engineering, Railroad, and twenty other trades. Full catalog **FREE.** A postcard brings yours.

**F. J. DRAKE & CO., PUBLISHERS**  
1003 Michigan Avenue, Chicago



# How to Invent

## Edison Says "Invention is a Science and should be taught as a Profession"

### One Idea May Win You a Fortune

Thousands of inventions are needed today. Just one little idea can bring you fortune and fame. The world is waiting for new inventions in engineering, chemistry, household articles, radio,



and other fields—and will pay big money for even the simplest idea. Little things like the tin bottle cap, the crimped hair-pin, the rubber on the end of a pencil brought their inventors hundreds of thousands of dollars. Couldn't you make some equally simple invention? Haven't you ideas that could be turned into money? Inventing isn't a matter of blind luck—it isn't a question of guesswork. Invention is based on certain principles, just as any other profession. It follows a definite course of procedure step by step from the origination of the first idea to its final development on a commercial scale.

## Learn at Home in Spare Time

Hitherto, every inventor had to work out these principles of invention for himself. For every successful inventor knows and uses these principles. He knows WHAT TO INVENT and HOW TO INVENT. But now you can learn in a few months what it took great inventors years of discouragement and terrific struggle to acquire. Fifteen famous inventors have now revealed, for the first time, the secrets of invention. They explain how to originate ideas, how to develop and perfect your ideas, how to patent your inventions, and how to sell them to your best advantage. In short, they make it amazingly easy for you to become an inventor, simply by learning the whole wonderful science of invention, step by step, from beginning to end. It requires just fascinating moments of your spare time at home.

## First Course of Its Kind

This is the first course in practical invention that has ever been devised. Now you can take Edison's advice and actually learn HOW TO INVENT—how to make invention a profession! In simple, easy-to-understand language, you are told how successful inventors work; you learn how to use the secrets of invention that convert a simple little idea into money.

## FREE New Book on Inventive Science

A wonderful new book has just come from the press that tells all about the Science of Invention; that shows how great inventors work; how little ideas have made fortunes; how you, too, can easily learn the secrets of successful invention. This fascinating Book will be sent free to all those who are genuinely interested. Send for this Book today, as only a limited number are available for free distribution. Write your name and address on the coupon below, or send a post card NOW! There is no cost or obligation.

**BUREAU OF INVENTIVE SCIENCE**  
Dept. 211, Wisner Building, Rochester, N. Y.

Bureau of Inventive Science, Dept. 211  
Wisner Building, Rochester, N. Y.

Please send me your free book, "The Science of Invention."

Name.....

Address.....

City.....

State.....

WE want men and women who are desirous of making \$25 to \$200 per week clear profit from the start in a permanent business of their own. Mitchell's Magic Marvel Washing Compound washes clothes spotlessly clean in ten to fifteen minutes. One hundred other uses in every home. Nothing else like it. Nature's mightiest cleanser. Contains no lye, lime, acid or wax. Free samples make sales easy. Enormous repeat orders—300% profit. Exclusive territory. We guarantee sale of every package. Two other "right sellers" and sure repeaters give our agents the fastest selling line in the country. No capital or experience required. Baker, Ohio, made \$600 last month. You can do as well. Send for free sample and proof. L. Mitchell & Co., Desk 77, 1302-1314 E. 61st St., Chicago, Illinois.

**AGENTS**—Cost \$5.00 your profit \$89.50 transferring monograms on autos, trunks, bags, furniture, etc., no experience, no license. Write for free samples. Transfer Monogram Co., Inc., 10 Orchard St., Dept. 155, Newark, New Jersey.

**RISK** a postal and learn how to start profitable business without capital or experience. \$60 weekly easy. Silvering mirrors, refinishing tableware, reflectors, plating. Complete outfit furnished. International Laboratories, Dept. 27, 309 Fifth Avenue, New York City.

**AGENTS:** It's a "Whirlwind." Get in on the greatest Repeat Order Proposition. In three months' time orders for Universal Products will come in by themselves. Let us prove it. Exclusive territory. All repeat orders turned over to you. Write today. Universal-Victor Company, Desk A, 1460 East Jefferson Ave., Detroit, Mich.

**AGENTS**—Clever Invention! Inkspoon makes every pen a fountain pen. Fast office seller; big profit, demand increasing everywhere. Exclusive territory offered. Sample free. H. Marul Company, Tribune Building, New York.

**A BUSINESS** of your own—Make sparkling glass name plates, numbers, checkerboards, medallions, signs; big illustrated book. Free. E. Palmer, 512 Wooster, Ohio.

**SHIRT** manufacturer want agents; sell advertised brand men's shirts direct to wearer. No capital or experience required. Free samples. Madison Mills, 505 Broadway, New York.

**WHY** work for others? Make and sell your own goods. We show you how. Enormous profits. Write quick for free book explaining everything. National Scientific Laboratories, 641 Main, Richmond, Virginia.

**\$1,080** made by Wingo in six weeks selling Never Fail Razor Sharpeners. Purdy made \$40.00 first day. Other inexperienced men cleaning up big money. Applewhite La., six orders in thirty minutes. Hurry—investigate—exclusive territory. Write to-day. Never Fail Co., 152 Allen Bldg., Toledo, Ohio.

**MAKE** \$25 to \$50 week representing Clows' Famous Philadelphia Hosiery, direct from mill—for men, women, children. Every pair guaranteed. Prices that win. Free book "How to Start" tells the story. George Clows Company, Desk 24, Philadelphia, Pennsylvania.

**AGENTS**, \$60 to \$200 a week, free samples. Gold sign letters for store and office windows. Anyone can do it. Big demand. Liberal offer to general agents. Metallic Letter Co., 431 A, N. Clark Street, Chicago.

**GREATEST** sensation! Eleven-piece soap and toilet set, selling like blazes for \$1.75 with \$1.00 dressmaker's shears free to each customer; other unique plans. E. M. Davis Co., Dept. 59, Chicago.

**\$10 WORTH** of finest toilet soaps, perfumes, toilet waters, spices, etc., absolutely free to agents on our refund plan. Lacassian Co., Dept. 615, St. Louis, Missouri.

**ONLY** one sale a day means \$200 per month! Five sales \$1,000 per month! Marvelous new adding machine. Retails \$15.00. Work equals \$350 machine. Adds, subtracts, multiplies, divides automatically. Speedy, accurate, durable, handsome. Five year guarantee. Offices, stores, factories, garages buy one to dozen. A fortune for live agents. Write quick for protected territory and free trial offer. Lightning Calculator Co., Dept. P, Grand Rapids, Michigan.

**EARN** \$2.00 an hour in your spare time taking subscriptions for this magazine. Write to-day for the agency in your town. Popular Science Monthly, 225 West 39th Street, New York.

**AMBITIOUS** men, write today for attractive proposition, selling subscriptions to America's most popular automobile and sportsman's magazine. Quick sales. Big profits. Pleasant work. Digest Pub. Co., 1523 Butler Bldg., Cincinnati.

**AGENTS**—Best seller; Jem Rubber Repair for tires and tubes; supersedes vulcanization at a saving of over 800 per cent; put it on cold, it vulcanizes itself in two minutes, and is guaranteed to last the life of the tire or tube; sells to every auto owner and necessary dealer. For particulars how to make big money and free sample, address Amazon Rubber Co., 504 Amazon Building, Philadelphia, Pennsylvania.

**AGENTS** to travel by automobile to introduce our fast selling, popular priced household necessities. The greatest line on earth. Make \$10 a day. Complete outfit and automobile furnished free to workers. Write today for exclusive territory. American Products Co., 7917 American Bldg., Cincinnati, Ohio.

**SELL** household necessities. Liberal credit extended. Hy-Gen-Ol Laboratory, Spring Valley, New York.

**LOCAL** distributors—For tire armor, an inside casing and armor that greatly increases mileage of all tires, prevents punctures and blowouts, saves tire repair expenses. Will give several thousand or more miles to almost all worn-out tires. Outlasts several tires and costs less than good tubes. Very liberal discounts. Big opportunity in every locality. Write for exclusive agency. Motor Products Co., Lunt Avenue, Chicago.

**SALESMEN**—Dollars are waiting for you! Wherever internal combustion engines are used—and that means everywhere. Motor Ignition Amplifiers sell themselves on their merits by easy demonstration. More power to a new motor, new power to the old—verify they sell because they excel—they serve power and conserve ignition system, reduce carbon deposits and insure quick start with complete combustion. Salesmen, agents, dealers—investigate. Motor Ignition Corporation, Albany, New York.

**SELL** necessities. Everybody needs and buys the "Business Guide." Bryant cleared \$800 in July. Send for sample. It's free. Nichols Company, Box 1B, Naperville, Illinois.

**MAKE** 600% profit. Free samples. Lowest priced gold window letters for stores, offices. Anybody can do it. Large demand. Exclusive territory. Big future. Side line. Acme Letter Company, 2800 N. Congress, Chicago.

**\$31.00 PROFIT** with only \$1.50 selling Pure Gold Leaf Monograms for Automobiles—trunks, bags—(Window and Wagon letters). Applied instantly. No experience necessary. No. 1 Outfit brings you \$32.50—cost only \$1.50—you make \$31.00 profit. Get colored catalog. Full particulars. Free samples (36 designs). "Hurry." Nullite Auto-Aid, Hartford, Connecticut.

**POLMET** Polishing Cloth cleans all metals like magic. Sells fast at 25c. Sample free. F. C. Gale Co., 15 Edinboro Street, Boston, Massachusetts.



## \$1000 REWARD

### For the Capture of This Man

**CONVICT** 6138, escaped from the State Penitentiary; Name, Charles Condray; age 37; Height, 5 ft. 8 in. Weight 141 pounds; Hair, light brown; Eyes, gray.

Easy enough to identify him from his photograph and this description, you may say—but, Condray took the name of "Brown", dyed his hair, darkened his skin, grew a mustache, put on weight and walked with a stoop.

Yet, he was captured and identified so positively that he knew the game was up and returned to the penitentiary without extradition. How was it accomplished? Easy enough for the Finger Print Expert. They are the specialists, the leaders, the cream of detectives. Every day's paper tells their wonderful exploits in solving mysterious crimes and convicting dangerous criminals.

## More Trained Men Needed

The demand for trained men by governments, states, cities, detective agencies, corporations, and private bureaus is becoming greater every day. Here is a real opportunity for YOU. Can you imagine a more fascinating line of work than this? Often life and death depend on finger print evidence—and big rewards go to the expert. Many experts earn regularly from \$3,000 to \$10,000 per year.

## Learn at Home in Spare Time

And now you can learn the secrets of this science at home in your spare time. Any man with common school education and average ability can become a Finger Print Detective in surprisingly short time.

## Free Course in Secret Service

For a limited time we are making a special offer of a *Professional Finger Print Outfit*, absolutely free, and *Free Course in Secret Service Intelligence*. Mastery of these two kindred professions will open a brilliant career for you.

## Send for Free Book



Write quickly for fully illustrated free book on Finger Prints which explains this wonderful training in detail. Don't wait until this offer has expired—mail the coupon now. You may never see this announcement again! You assume no obligation—you have everything to gain and nothing to lose. Write at once—address

**University of Applied Science**  
Dept. 9368, 1920 Sunnyside Ave., Chicago, Ill.

**UNIVERSITY OF APPLIED SCIENCE**  
Dept. 9368, 1920 Sunnyside Ave., Chicago, Ill.  
Gentlemen:—Without any obligation whatever send me your new, fully illustrated, FREE book on Finger Prints and your offer of a FREE course in Secret Service Intelligence and the Free Professional Finger Print Outfit.

Name.....

Address.....

Town.....State.....





## Make your voice an Asset!

Have you ever stopped to consider what folks think of your voice—what effect the voice has in business, in social affairs, in your daily routine of life? Your voice can easily be a most valuable asset if you are a salesman, an executive or if you aspire to be more than you are right now.

### Break Down Resistance!

The executives of your firm, the men to whom you must sell yourself, the buyers to whom you must sell your firm's product, the men whose friendship you want, the girl, perhaps—all these people can make or mar your future. And they judge you in a large measure by your voice. The speaking voice is your most vital point of contact with others—does it impress, charm, and interest those you meet? Or, does it grate upon them—cause them to shun you—hinder your chances of business success and social popularity?

### Haberstro's Complete Course in Voice Culture 15 Lessons—Now \$5

Haberstro, the World-Famous Voice-Culturist, has put his marvelous system into a handy and inexpensive form which is now offered to millions of people, where before only a favored few could avail themselves of his instruction, at great cost of time and money.

Through great economy in publishing, we are able for the first time to offer you the complete Haberstro course on The Speaking Voice for the small cost of \$5, postpaid, and guaranteed. If for any reason you conclude, after 5 days' trial, that the course does not benefit you, return it to us, and your money will be refunded immediately.



To bring the price of the course down to \$5, we have cut printing cost, and guarantee satisfaction or money back. We fully protect you by this guarantee.

Send the Coupon Now. Fill out the coupon below—pin \$5 to it—mail it at once. Make today a turning point toward success. Do it now!


Personal Culture Society, Inc.  
Voice Dept. P.S.1  
6 N. Michigan Avenue  
Chicago

Personal Culture Society, Inc.  
6 N. Michigan Avenue  
Chicago, Ill.

For the attached \$5 send me Haberstro's Complete System, "The Voice in Speech," under your advertised guarantee.

Name .....  
Address .....

# \$225<sup>00</sup> to \$500<sup>00</sup> per Month!

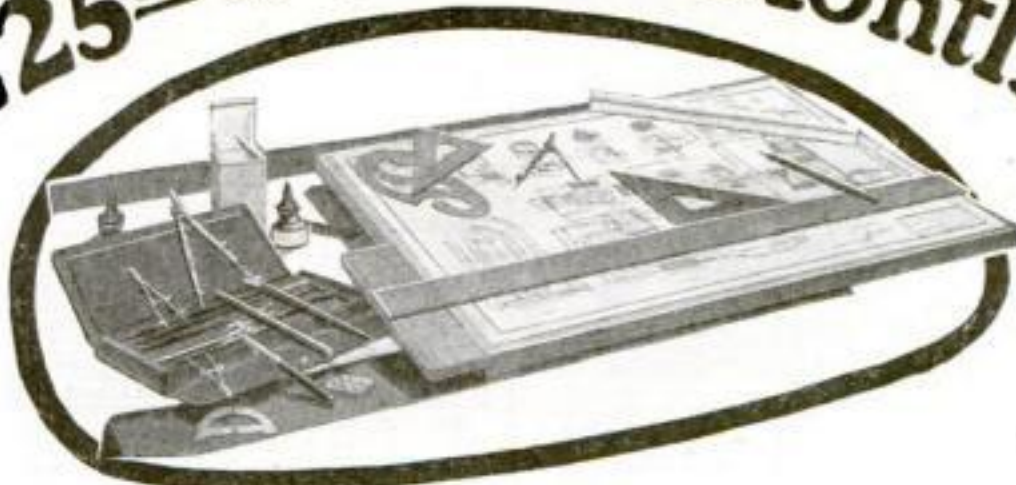

## Expert Draftsman's Complete Outfit FREE

There is a tremendous demand for trained draftsmen. Easy pleasant work and big pay, with limitless opportunities. Before a building can be put up—before a machine can be made—or before a bridge can be built, draftsmen must draw the plans. In machine shops—in manufacturing plants—in fact wherever there is industry trained draftsmen are needed. The pay is big and because the work brings you in direct touch with the captains of industry the draftsman has an unusual opportunity for advancement. Read these facts:

Now is the time to start. Draftsmen get good pay from the beginning and can work up to \$500 a month and more. Draftsmen are needed everywhere. Once you are trained you can choose your own business and work in any part of the country you please. Coyne training makes everything easy for you. Coyne student, L. T. Dubendorf, writes: "Immediately after completing Coyne course I went to work for Armour & Co. Work was easy for me. Five months later I accepted a position in New York at a large increase in salary."

### Complete Outfit FREE

Gives You Practical Drafting Training

Outfit includes complete set of fine "professional" drawing instruments with double set of compasses and dividers all in velvet lined case. Drawing board, T square, two triangles, protractor, universal curve, triangular, standard scale, water-proof ink, pens, pencils and all accessories. Coyne methods are practical. This expert's superb complete outfit given

### MONEY BACK GUARANTEE

We guarantee that the training of the Coyne Course will place you in a good position as an expert draftsman or we will refund your money.



B. W. COOKE

PRESIDENT

## COYNE

TRADE AND ENGINEERING SCHOOL

Recognized Producer of Successful Men

552-598 S. Throop St., Dept. 1788, Chicago, Ill.

### POSITION GUARANTEED



The Finger Print profession wants men immediately. Big pay, interesting work, no lay-offs or shut-downs. I will teach you quickly to become a trained Finger Print expert. I guarantee a position and back it up with a \$1,000 bank deposit. Write at once for full explanation and details about my free Secret Service course, free Secret Service reports and special low price. Offer is limited. Write at once. No obligation. U.S. SCHOOL OF FINGER PRINTS, Dept. 468, 7003 N. Clark St., Chicago.

FREE?



World Batteries FOR

Radio or Automobile  
SAVE YOU 50%

Buy direct from factory. Get highest quality—lowest prices and 100% battery service.

### WRITTEN TWO-YEAR GUARANTEE

AUTOMOBILE PRICES	
6 Volt, 11 Plate	\$12.50
Ford, Darr, Chev.	
6 Volt, 13 Plate	14.50
Overland, Buick	
12 Volt, 7 Plate	18.00
Maxwell, Dodge	
Same 50% Saving on all cars. Give make car	

Batteries shipped immediately express C.O.D. Thousands of satisfied users. Mail your order today!

RADIO PRICES	
6 Volt, 40 Amps.	\$ 8.50
6 " 60 " "	10.00
6 " 80 " "	12.50
6 " 100 " "	14.50

World Battery Co. 60 E. Roosevelt Road Dept. P.S. CHICAGO, ILL.

### Easy to Learn at Home

The Practical Teaching Methods of the Great Coyne Schools Brought to Your Home

The Coyne Home Study Course guarantees to train you until you are permanently located in a job. Remember, the Coyne Trade and Engineering Schools are recognized by educators all over the world. Students come from all over the world to get Coyne training. Why? Because of the Coyne school's long established, tremendous reputation for successful teaching by its great staff of experts. Coyne is not a "one man" school, but a great educational institution, 23 years old, an acknowledged leader and originator; Coyne originated the "Learn by Doing" method now endorsed by educators everywhere. Coyne has graduated thousands of successful, prosperous men all over the world. Heretofore the valuable Coyne training could be had only at our residence school. But now, you can enjoy the advantages and the special Coyne training under the personal direction of our experts right in your own home, at a fraction of the cost of the resident school. You can't make a mistake if you write for the Coyne free book. Coyne students say every minute of the course was enjoyable. Some students took good positions three months before their course was finished. Here is your opportunity.

## FREE Book

Send Now for Your Copy and FREE Outfit Offer

Mail the coupon for our interesting illustrated book, "Drafting the Foundation of Industry," sent you free. It explains all about the Coyne home study method and shows you how to become a draftsman in the quickest and easiest way. You want to know all about this great institution. Don't put it off. Send for this book now. Get the free drafting outfit offer. It is absolutely free, no obligation. The book contains the most valuable information you will ever get in your life. Send for coupon now.

Check Coupon and mail NOW

Coyne Trade and Engineering Schools

Dept. 1788

552-598 S. Throop St. Chicago, Ill.

Dear Sirs—Please send me, absolutely free, without obligation, your book, "Drafting the Foundation of Industry," also full information about the Course in Drafting and your Special Free Outfit offer. (Check which course you prefer.)

☐ Home Study Course ☐ School Course

Name .....

Address .....

City ..... State .....

## Radio Needs Trained Men

Radio is sweeping the country like wild fire. Thousands of dollars are being spent for expensive outfits. RADIO EXPERTS are needed everywhere to keep this equipment in order and to sell and install new outfits.

### Be a Radio Expert

I will train you quickly and easily in your spare time, to become a RADIO EXPERT so you can install, construct, repair and sell Radio equipment. I am a Graduate Electrical Engineer and from actual experience I will give you exactly what you must know to make the really big money in radio.

**FREE** My Consultation Service to you is FREE. This outside help which I gladly give you is, in itself, worth more than the small cost of the Complete Course.

### START NOW

Don't let others beat you to the big money. Start now and within a few weeks' time I will train you at home, at an amazingly low cost, to become a RADIO EXPERT. Write for "Radio Facts" sent free without obligation.

A. G. MOHAUPT, Electrical Engineer  
American Electrical Association  
4513 Ravenswood Ave., Chicago, Ill.

WRITE TODAY



# Your Choice 75c a Week



No matter what your occupation one of the home study sets listed below will quickly fit you for a better job and bigger pay. Any set you select will be sent for seven days' examination, and if you decide to buy you may pay the rock-bottom price at the rate of only 75c a week. But you must act now! We cannot guarantee these reduced prices for any great length of time.

These books are the work of recognized authorities. They are written in plain, easily understood language, by recognized authorities, and contain hundreds of photographs, diagrams, tables, etc., that make difficult points as simple as A-B-C. Handsomely and durably bound, and stamped in gold.

## Pay-Raising Books At Greatly Reduced Prices

<b>Accountancy and Business Management</b> 7 vol., 2700 pages, 1000 pictures. Was \$52.50.....Now \$29.80
<b>Carpentry and Contracting</b> , 5 volumes, 2138 pages, 1000 pictures. Was \$37.50. Now \$19.80
<b>Civil Engineering</b> , 9 volumes, 3900 pages, 3000 pictures. Was \$67.50.....Now 34.80
<b>Electrical Engineering</b> , 8 volumes, 4100 pages, 3300 pictures. Was \$60.00....Now 29.86
<b>Automobile Engineering</b> , 6 volumes, 2600 pages, 2000 pictures. Was \$45.00....Now 21.80
<b>Machine Shop Practice</b> , 6 volumes, 2300 pages, 2500 pictures. Was \$45.00....Now 21.80
<b>Steam and Gas Engineering</b> , 7 volumes, 3,300 pages, 2500 pictures. Was \$52.50, Now.....24.80
<b>Law and Practice</b> (with reading course), 12 volumes, 6000 pages, illustrated. Was \$97.50.....Now 49.80
<b>Fire Prevention and Insurance</b> , 4 vols., 1500 pages, 600 pictures. Was \$30.00. Now 14.80
<b>Telephony and Telegraphy</b> , 4 volumes, 1728 pages, 2000 pictures. Was \$30.00. Now 14.80
<b>Sanitation, Heating and Ventilation</b> , 4 volumes, 1454 pages, 1400 pictures. Was \$30.00.....Now 14.80
<b>Drawing</b> , 4 volumes, 1578 pages, 1000 pic- tures, blue-prints, etc. Was \$30.00....Now 14.80
<b>Employment Management and Safety</b> , 7 vol., 1800 pages, 540 illustrations. Was \$52.50.....Now 24.80

## Send No Money Shipped for 7 Days' Trial

Yes, we'll gladly ship any set right to your home or office upon your simple request. Pay only shipping charges when the books arrive. Don't send a penny until after you have used them seven days, then remit only \$2.80 or return them at our expense. Pay balance at the rate of \$3.00 a month—75c a week.

Act now—while these splendid books are being offered at 20% to 50% less than regular prices. This offer is open to every person within the boundaries of the U. S. and Canada. Grasp your opportunity—fill in and mail the coupon NOW!

American Technical Society, Dept. X-208, Chicago

American Technical Society, Dept. X-208, Chicago, U.S.A.

Please send me set of.....

for 7 DAYS' examination, shipping charges collect. I will examine the books thoroughly and, if satisfied, will send \$2.80 within 7 days and \$3 each month, until I have paid the special price of..... If I decide not to keep the books, I will notify you at once and hold them subject to your order. Title not to pass to me until the set is fully paid for.

NAME.....

ADDRESS.....

EMPLOYED BY.....

### AGENTS AND SALESMEN WANTED

**AGENTS:** If you are making less than \$300 a month, our proposition on Sentinel Burglar Alarms for windows and doors will interest you. Many agents earn \$20 daily. Brand new inventions. No wires or batteries. Instantly attached to any door or window. No competition. Provides cheap burglar insurance. Big money makers. Write to-day for extremely liberal terms to agents. Sentinel Alarm Co., 1452 Marquette Bldg., Chicago, Illinois.

300% profit. Snow Dust washes clothes without rubbing. Women wild about it. Going big everywhere. Free samples. Exclusive territory. Norman F. Conrad, Wabash, Indiana.

**AMBITIOUS** men wanted to refinish and plate brass beds, chandeliers, autos, accessories, headlights, by improved methods. Capital or experience unnecessary. Large daily profits. Write for samples and particulars. Lorraine Metalcrafts, 28 West 22nd Street, New York.

**RUMMAGE** sales make \$50.00 daily. We start you. Representatives wanted everywhere. "Wholesale Distributors," Dept. 34, 609 Division Street, Chicago.

\$100,000.00 concern wants agents to take orders for Gabardine Gas Mask Raincoats. Biggest selling coat in America to-day. Wonderful value. Big profit—in advance. Two sales mean big day's wages. Only sample of cloth necessary—furnished free. We deliver and collect. Write to-day for exclusive territory and selling outfit. Dept. 612, Lewis Raincoat Company, Cleveland.

**WANTED**—district purchasing agents. \$250 per month. Steady employment and exclusive territory. Write now. Experience unnecessary. National Instrument Company, 4703 North Hamilton, Chicago, Illinois.

**SELL** guaranteed coal saving devices. Save half coal. Expensive coal makes tremendous demand. 100% profit. A. D. Dalot, 204 N. 5th Street, Philadelphia, Pennsylvania.

**PEOPLE** must eat—Big profits introducing Mother Hubbard Foods. Goods worth \$150 free. Sales guaranteed. Send for free outfit. Inthout Company, 558H Congress, Chicago.

**CLARKE** made \$18 an hour selling vestpocket windshield cleaner needed by every autoist, motorman, engineer; one rub keeps glass clear 24 hours; 60,000 sold; amazing proposition free. Security Mfg. Co., Dept. 637, Toledo, Ohio.

**AGENTS:** The latest novelty for the holiday trade—Guest Room Bouquets. Each flower contains a useful article for the guest. Must be seen to be appreciated. Wholesale \$7.20 per dozen, retail \$1.00. Sample prepaid 75c. E. Condon, 77 Bedford Street, Boston, Massachusetts.

**SALESMEN** act quick. Ten patented auto necessities. Spark plugs, visors, windshield cleaners, hose clamps, etc. Generous commissions. Jubilee Mfg. Co., 148 St. C, Omaha, Nebraska.

**WORLD'S** fastest selling auto accessory! County distributors wanted; write today. G. L. W. Spring Oiler Co., San Diego, California.

**MEN** with Ford cars: Wonderful money-making possibility as full-time or side line proposition selling our Peter Prim Tire Pumps for Ford cars. Direct engine-driven—attaches to crank shaft—pumps 60 pounds air pressure in ninety seconds. Tremendous demand—no competition. Write quick for circular. Clagett Manufacturing Company, 631 Pennsylvania Avenue, Washington, D. C.

**AGENTS:** Enormous profits, permanent repeat business, exclusive territory, selling highest quality products at low prices. Coconut Oil Shampoo retails 50c bottle, costs \$1 dozen. Soaps, perfumes, extracts, etc. M. Verdina Co., 16 East 13th Street, New York.

**AGENTS**—Big profits. 50c seller, office-household necessity. Sample 25c. Act quick. Ajax Co., Steger, Illinois.

**SALESMEN**—Become independent. Own your business; experience unnecessary; selling our \$7,500 accidental death, \$50 accident, \$25 sick weekly benefits; \$12.50 yearly; other amounts proportionate. Guaranteed steady income from renewals. \$250,000 deposited Insurance Department. Registration Dept. F, Newark, New Jersey.

**AGENTS**—6,000,000 Fords need our 25c "Greater Grip" guaranteed 5,000 mile fabric fan belt. Teuscher & Son, St. Louis, Missouri.

**RADIO**—A New Field. Big money selling radio parts. We manufacture over 50 Radio parts. Send for catalog. Ajax Co., 7804 Stony Island Avenue, Chicago, Illinois.

**AGENTS, salesmen, demonstrators.** You will have the devil's own time trying to find a better seller than "Zippe." If there was such a thing we'd have it. 150% profit on 50c "Go Getter" repeat article that sells on ten-second demonstration. Works While You Watch It. Demonstrates value while others waste time making claims. New discovery! Greatest scientific triumph of the age. It's the berries. Haven't room to tell our story here. Write immediately. Karam-Smith Co., 1245 Clark St., Ft. Wayne, Indiana.

100% profit selling our chemical specialties. Quaker City Laboratories, 132 E. Albanus Street, Philadelphia, Pennsylvania.

**EARN \$10.00 to \$35.00 weekly** mailing circulars at home. Outfit and instructions 25c. Jamorris, 2305 Gratz, Philadelphia, Pennsylvania.

**STATE and County Distributors.** We have it, \$65 to \$100 weekly; new patented auto device for Ford cars; big demand; fast seller; act quick. State and county distributors wanted. Write Bigelow-Bruno Co., Dept. B. 537 S. Dearborn Street, Chicago.

**RELIABLE** tire concern (wants capable man for county representative and sales manager. \$50 capital necessary. Chicago Rubber Works, 2848 Broadway, Chicago, Illinois.

**EASY, pleasant work** for mechanics, shop men, clerks during spare hours, will add many dollars to their salaries. Also want persons who can give full time. Big wages assured. Novelty Cutlery Company, 27 Bar Street, Canton, Ohio.

**AGENTS**—Beautiful complete new line combination toilet article sets—magnificent display boxes—sell instantly now until Xmas. Tremendous profits—exclusive territory. —Foster Reid Factories, Z, 2001 Mango, Chicago.

**BIG money and fast sales.** Every owner buys gold initials for his auto. You charge \$1.50; make \$1.35. Ten orders daily easy. Write for particulars and free samples. American Monogram Co., Dept. 47, East Orange, New Jersey.

**SELL** Minutemend for tires and tubes—cost 2c. Repaid: surpasses vulcanizing, saves 500%. Every auto and accessory dealer buys. Profits amazing. Shaw made \$21 first day. Hart \$155 first week. Particulars and free sample. The Colonial Rubber Co., Dept. 88, Philadelphia, Pa.

**AGENTS, Radiophone** complete: 200 percent under retail. Big first payment agents. No investment, collections, deliveries. Patented "Tupay" plan winner. National Specials, 154 Nassau, New York.

**MR. ADVERTISER:** Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## BE A RAILWAY TRAFFIC INSPECTOR

**YOU CAN EARN UP  
TO \$250 per Mo.**

**Expenses Paid**

**POSITION  
GUARANTEED**



### Hundreds of Openings!

Railway Traffic Inspectors earn good money, enjoy most interesting work, have splendid chances for advancement. Travel, see the country or remain near home. Healthful, outdoor work; something new every day.

More men are wanted than are trained. Start at \$110 per month minimum, expenses paid. Meet big railway officials. Earn up to \$250 and \$300 per month as you gain experience.

### EASY TO QUALIFY

Prepare in 3 months' spare-time study at home. Any average man can qualify. Position is then guaranteed paying at least \$110 per month and expenses or enrollment fee is refunded! You have nothing to lose.

### Read What M. C. Eves Says:

"I have never found work so interesting as my present position has been since I became familiar with the system used on these lines.



Your Course of Study on Traffic Inspection together with the experience received here and in Providence fits me for most any position in this line of work which I may have offered me."

### YOU TAKE NO RISK

Send coupon today for free booklet. Remember, if position is not secured you, your enrollment fee is returned! That is our Guarantee. Don't delay. Investigate now.

**Standard Business Training Institute  
Buffalo, N. Y.**



**Standard Business Training Inst.,  
Buffalo, N. Y.**

Send me, entirely free, Booklet No. D 732, giving full particulars about course in Railway Traffic Inspection.

Name.....

Street.....

City.....





You owe it to your home, your loved ones, yourself!

A beautiful little blue steel automatic  $4\frac{3}{8}$  in. long by  $3\frac{1}{8}$  in. deep. Holds seven .25 cal. bullets—any standard automatic ammunition. An ideal gun for a woman.

**\$8.25**  
for 25 caliber  
7 Shot Automatic

**\$10.50**  
for 32 caliber  
10 Shot Automatic

Including Extra Magazine

Heavy .32 cal. military model  $6\frac{1}{8}$  in. long by  $4\frac{1}{4}$  inches deep. Shoots ten shots—any standard automatic ammunition.

Both models are exceptionally fine guns that usually retail from \$15 and \$25 up and make an ideal Christmas present. The very finest quality forged steel and expert workmanship throughout. Absolutely guaranteed! If you are not entirely satisfied, return within ten days and we will return your money at once. If any defects occur within one year we will repair or replace free of charge.

## Send No Money!

unless you wish. Write clearly your name, address and model you wish and we will ship by return mail. You pay the postman this special price when he brings your automatic.

**Denver Importing Company**  
Dept. A-1 P. O. Box 276 Denver, Colo.

### RADIO PHONE RECEIVING

A practical book for everybody. Written in non-technical terms by nine specialists. 224 pages. Fully illustrated.

Price, \$1.50

Popular Science Monthly, 225 W. 39th St., New York

**Make \$5000 Every Year \$2000 in Your Spare Time**

Share in our profits besides. Just show and write orders for "Weather Monarch" Raincoats and Waterproof Overcoats. Absolutely new. The greatest overcoat ever made. Prices lower than stores. Sales easy.

**Commissions in Advance**

Ask about "Duol Coat" No. 999. Free overcoat or raincoat for your own use.

**Associated Raincoat Agents, Inc.**  
442-450 North Wells St., Division 61, Chicago, Ill.

**Free**  
Booklet & Sample Lessons

## Stop Wondering How I Teach Piano; I'll Show You, FREE

YEAR after year you've seen my advertisement in all the leading publications offering to teach you piano in *quarter* the usual time. Year after year my school has grown and grown until now I have far more students than were ever before taught by one man. In 1921 over a thousand students graduated from my Piano or Organ course and received their diplomas.

Yet when I first started giving piano and organ lessons by mail in 1891 my method was laughed at. Could any conservatory have grown as it has, obtained students in every state of the Union and in fact practically every civilized country of the world unless it produced very unusual and satisfying RESULTS for its students? See for yourself what it is that has brought my method so rapidly to the front. Write for free booklet and sample lessons.

Now, for the first time, you can obtain sample lessons without charge. In the past I have always been opposed to sending out free lessons, even to persons who were seriously interested in my course. But my friends have insisted that I give everybody a chance to see for themselves just how simple, interesting and DIFFERENT my lessons are, and I have consented to try the experiment for a short time. Simply mail the coupon below or write a postcard, and the 64-page booklet and sample lessons will go to you at once absolutely free and without obligation.

**Within four lessons** you will play an interesting piece on the piano or organ, not only in the original key, but in all other keys as well. Most students practice months before they acquire this ability. It is made possible by my patented invention the Colorotone. Another invention obtainable only from me is my hand-operated moving picture device, Quinn-dex. By means of Quinn-dex you actually see my fingers in motion on the piano, and can learn just how to train your own fingers.

When I say that I can teach you piano in *quarter* the usual time, do not think that this is too good to be true. Modern inventions and improved methods have accomplished just as great wonders in other branches of education. You at least owe it to yourself to investigate. Send coupon or postcard at once, before the offer of free sample lessons is withdrawn.

**FREE BOOK COUPON**

**Quinn Conservatory**  
Studio P. S. 51  
598 Columbia Road  
Boston 25, Mass.

Please send me without cost or obligation your free booklet, "How to Learn Piano or Organ," free sample lessons and full particulars of your method.

Name.....  
Address.....

## Easy to Learn Cartooning at Home

**Earn \$60 to \$200 a Week in This Fascinating Profession**

Sport, humorous, serious and animated cartoons—never have they been in such big demand! Successful cartoonists now earn \$3,000 to over \$100,000 a year. You can learn to draw these cartoons that SELL. Many of our students earn big money even while learning!

### Easy Home-Study Method

Prepared by one of America's foremost cartoonists, this course teaches you to originate and draw all kinds of cartoons. You learn at home in spare time, yet all your work receives through the mail the individual help and criticism of prominent cartoon experts. Many successful cartoonists taught by this method.

### Send for Free Book

Learn more about this method and the amazing opportunities open to you in this attractive fast-growing field. Our newly prepared Free Book is crammed with valuable information about this work, and explains fully this easy home-study method. Mail post card or letter for it TODAY!

**WASHINGTON SCHOOL OF CARTOONING**  
1076 Marden Building Washington, D. C.



## Hotels Need Trained Executives

Nation-wide demand for trained men and women in all departments of hotels, clubs, and apartment houses. Uncrowded field; fine living, quick advancement in the big hotels of the United States—now America's Fourth Largest Industry. Statistics show that ONE IN EVERY TEN HOTELS WILL HAVE AN OPENING FOR A MANAGER THIS YEAR. Thousands of other positions also open to those who qualify through training.

The Lewis School guarantees to give you the valuable knowledge that it has taken some of the most successful hotel men years to obtain—men who are now making \$5,000 to \$50,000 a year. All of your training will be under the personal direction of Clifford Lewis—a hotel expert of national reputation. A few spare-time hours a week given to the simple, clear lessons of the course open the way to a good position, a fine living, and a handsome salary. The training will in no way interfere with your present activities.


Send today for FREE BOOK "Your Big Opportunity." Don't wait a minute—you may lose the opportunity of a lifetime. Mail the coupon NOW. Your whole future may depend on it.

**Lewis Hotel Training Schools**  
CLIFFORD LEWIS, Pres.  
Room 2719  
Washington, D. C.

Send me without obligation the FREE BOOK "Your Big Opportunity."

Name.....  
Please Print Name  
Street.....  
City..... State.....



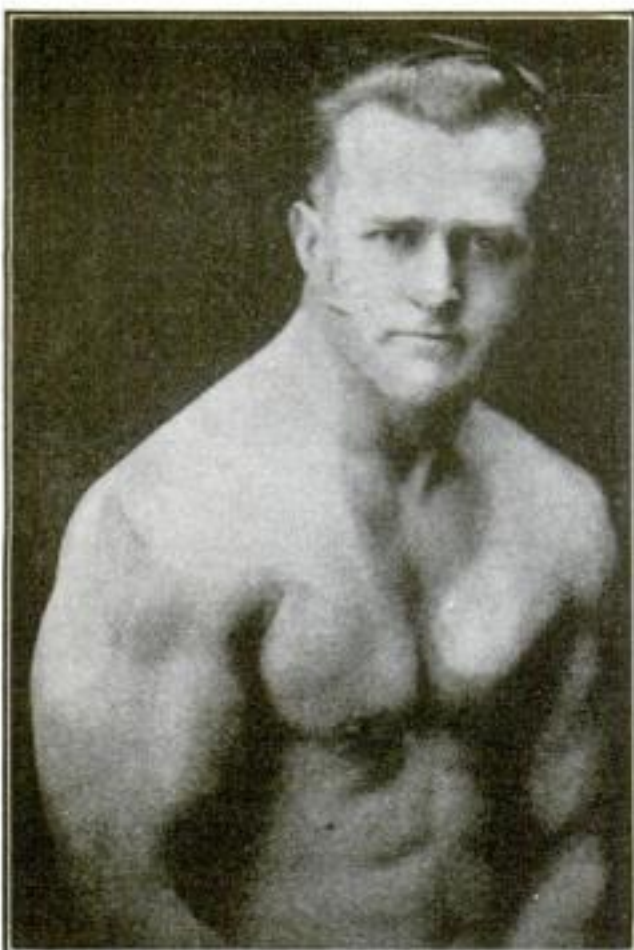

Latest Photograph of Earle E. Liederman

## If you were dying tonight

and I offered you something that would give you ten years more to live, would you take it? You'd grab it. Well, fellows, I've got it, but don't wait till you're dying or it won't do you a bit of good. It will then be too late. Right now is the time. To-morrow, or any day some disease will get you and if you have not equipped yourself to fight it off, you're gone. I don't claim to cure disease. I am not a medical doctor, but I'll put you in such condition that the doctor will starve to death waiting for you to take sick. Can you imagine a mosquito trying to bite a brick wall? A fine chance.

### A REBUILT MAN

I like to get the weak ones. I delight in getting hold of a man who has been turned down as hopeless by others. It's easy enough to finish a task that's more than half done. But give me the weak, sickly chap and watch him grow stronger. That's what I like. It's fun to me because I know I can do it and I like to give the other fellow the laugh. I don't just give you a veneer of muscle that looks good to others. I work on you both inside and out. I not only put big, massive arms and legs on you but I build up those inner muscles that surround your vital organs—the kind that give you real pep and energy, the kind that fire you with ambition and the courage to tackle anything set before you.

### ALL I ASK IS NINETY DAYS

I'll put one full inch on your arm in just 30 days. Yes, and two full inches on your chest in the same length of time. Meanwhile, I'm putting pep into your old back-bone. And from then on, just watch 'em grow. At the end of thirty days you won't know yourself. Your whole body will take on an entirely different appearance. But you've only started. Now comes the real work. I've only built my foundation. I want just 60 days more (90 in all) and you'll make those friends of yours that think they're strong look like something the cat dragged in.

### A REAL MAN

When I'm through with you, you're a real man. The kind that can prove it. You will be able to do things that you had thought impossible. Your deep full chest breathes in rich pure air stimulating your blood and making you just bubble over with vim and vitality. Your huge, square shoulders and your massive muscular arms have that craving for the exercise of a regular he man. You have the flash to your eye and the pep to your step that will make you admired and sought after in both the business and social world.

This is no idle prattle, fellows. If you doubt me, make me prove it. Go ahead. I like it. I have already done this for thousands of others and my records are unchallenged. What I have done for them, I will do for you. Come then, for time files and every day counts. Let this very day be the beginning of new life to you. SEND FOR MY BOOK

### "MUSCULAR DEVELOPMENT"

It is chock full of large size photographs of myself and my numerous pupils. This book is bound to interest you and thrill you. It will be an impetus—an inspiration to every red blooded man. I want every man and boy who is interested to just send the attached coupon and the book is his absolutely free. All I ask you to cover is the price of wrapping and postage—10 cents. Remember this does not obligate you in any way. I want you to have it. So it's yours to keep. Now don't delay one minute—this may be the turning point in your life today. So tear off the coupon and mail at once while it is on your mind.

### EARLE E. LIEDERMAN

Dept. 1311 305 Broadway, New York

### EARLE E. LIEDERMAN

Dept. 1311, 305 Broadway, N. Y. City

Dear Sir—I enclose herewith 10 cents for which you are to send me, without any obligation on my part whatever, a copy of your latest book, "Muscular Development." (Please write or print plainly.)

Name.....

Address.....

City..... State.....

### HELP WANTED

OUR genuine gold window sign letters are an excellent money-making proposition for handy men. Slann Sign System, 7505 St. Antoine, Detroit, Michigan.

MEN—Age 17 to 45. Experience unnecessary. Travel make secret investigations, reports. Salaries, expense. American Foreign Detective Agency, 321, St. Louis.

SILVERING mirrors, French plate taught. Easy to learn, immense profits. Plans free. Wear Mirror Works, Excelsior Springs, Missouri.

WRITE photoplays; \$50 each. Experience unnecessary; details free to beginners. Producers' League, 194, St. Louis.

DETECTIVES—Excellent opportunity. Fascinating work. Experience unnecessary. Particulars free. Write, American Detective System, 1968 Broadway, New York.

BE a detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Missouri.

BE a railway traffic inspector! \$110 to \$250 monthly; expenses paid, after 3 months' spare-time study. Splendid opportunities. Position guaranteed or money refunded. Write for Free Booklet C-13, Standard Business Training Institute, Buffalo, New York.

MAKE money in spare time mailing letters. Men, write now, enclosing stamped addressed reply envelope. Normande H Dept., 147 W. 23d Street, New York.

MEN, women, over 18, desiring Government positions, \$1400 up, write immediately for full information. Chicago Civil Service College, B-70 Kessler Building, Chicago.

BIG money made silvering mirrors, plating tableware, headlights. Outfits furnished. F. Decie Laboratories, 1133 Broadway, New York.

FIREMEN, brakemen, baggagemen, sleeping car, train porters (colored). \$140-\$200. Experience unnecessary. 838 Railway Bureau, East St. Louis, Illinois.

STOP daily grind. Start silvering mirrors, auto headlights, tableware, etc. Plans free. Clarence Sprinkle, Dept. 95, Marion, Indiana.

SALESMEN, we pay larger commissions than any other Brush house in the country to men selling our line of sanitary twisted in wire brushes. Sanitary Wire Grip Brush Co., 29 Mercer Street, New York.

U. S. GOVERNMENT wants help. Men—women, over 17. \$92-\$190 month. Steady. Common education sufficient. List positions free. Write immediately. Franklin Institute, Dept. J 42, Rochester, New York.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

### BUSINESS OPPORTUNITIES

USED correspondence courses sold, rented, and exchanged. List free. (Courses bought.) Lee Mountain, Pisgah, Alabama.

\$30 a week evenings home, small mail order business. Booklet for stamp. Sample and Plan, 25c. I trust you for \$3. Alspa Scott, Cohoes, New York.

ADVERTISE. Country town newspapers. Lists free. Pennell Company, Covington, Kentucky.

GET into the specialty manufacturing business. Amazing profits. We will send you free book explaining our system. Write immediately. A wonderful opportunity awaits you. National Scientific Laboratories, 641 Main, Richmond, Virginia.

BIG money; unlimited possibilities; universal, unlimited demand. Particulars. Co-operative Service Bureau, 5PSM937, Kokomo, Indiana.

SCHEMER Magazine, Alliance, Ohio, prints big profit schemes; one subscriber made \$25,000 from three; another \$10,000 from one. Try your luck. Year, \$1.00; 3 months, 25c.

RESPONSIBLE corporation wants general sales managers to open branch office, manage salesmen. \$500 to \$1000 necessary; expenses allowed to Baltimore if you qualify. Address Manager, 603 N. Eutaw Street, Baltimore, Maryland.

EXPERT Chemist will furnish Formula and Trade Secrets in all lines. Lists free. W. L. Cummings, Ph. D., Gordon Avenue, Syracuse, New York.

BE a detective. Excellent opportunity, good pay, travel. Write C. T. Ludwig, 424 Westover Bldg., Kansas City, Missouri.

ENTER a new business. Earn \$3,000 to \$6,000 yearly in professional fees making and fitting a foot specialty; openings everywhere with all the trade you can attend to; easily learned by any one at home in a few weeks, at small expense; no further capital required; no goods to buy, job hunting, soliciting or agency. Address Stephenson Laboratory, 15 Back Bay, Boston, Massachusetts.

WE start in business, furnishing everything. Men and women, \$30.00 to \$100.00 weekly, operating our "New System Specialty Candy Factories" anywhere. Opportunity lifetime. Booklet free. H. Ragsdale Company, East Orange, New Jersey.

PATENTS procured—Trade marks registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 44 Owen Building, Washington, D. C., or 2276-Z Woolworth Building, New York.

PREPARE-SELL your own products—Formulas, trade secrets. Interesting catalog free. C. Thaxly Co., Washington, D. C.

FORECAST your own market. Get our live new book "The Master Market Forecaster." It tells how. Fine opportunities await you. Market Forecaster Company, Box 174, Dept. C, Topeka, Kansas.

MAKE money at home making toys—we show you how. Send \$1.00 (no stamps) for complete working drawings and instructions. DeKalb Designing Co., Dept. 11, Decatur, Georgia.

JOIN National Institute of Inventors, 8 E. 14th Street—Strong protective membership society; will help secure, develop, manufacture and market patents. Dues \$10 yearly. Booklet free.

USED correspondence school courses only one quarter original price; bargain list 1000 courses free; used courses bought. Students' Exchange, 47A West 42nd Street, New York.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York

## ENTER AN UNCROWDED PROFESSION

# CHEMISTRY

## TO DAY OFFERS THE GREATEST OPPORTUNITY OF ANY VOCATION

All industry is three-fourths chemical. Never before has the world realized to what an extent it depends upon the chemist for industrial progress. The sudden and almost unbelievable expansion of the chemical field in the United States, has increased the need for trained men, whose highly responsible duties command excellent salaries.

### Dr. T. O'Connor Sloane Will Teach You Chemistry Right in Your Own Home

Our course is practical, intensely interesting and remarkably simple. No special education required—if you can read and write English you can understand every lesson. Dr. Sloane teaches you in your own home, with the same painstaking care with which he has already taught thousands in the class-room.

### Small Monthly Payments

The price of the course is very low and includes everything—there are no text books or extras to buy with our course. Our easy monthly payment plan places a chemical education within the reach of everyone.

### Experimental Equipment Furnished Without Extra Charge

We give to every student without additional charge, the chemical equipment needed for the experimental work of the course, including forty-two pieces of laboratory apparatus and supplies and eighteen different chemicals and reagents. The fitted heavy wooden box serves not only as a case for the outfit but also as a laboratory necessary for performing countless experiments.

### Sign and Mail the Coupon for Free Book and Special 30-Day offer

CUT HERE  
CHEMICAL INSTITUTE OF NEW YORK, Inc.  
(Home Ext. Division 11) 140 S—Liberty St., N. Y. City

Without obligation or cost, send me your free book "Opportunities for Chemists" and full particulars about the Experimental Equipment given to every student, and tell me about your plan of payment and special 30-Day offer.

Name.....

Address.....

City..... State.....

## MAKE YOUR OWN RADIO SET

### Prices Slashed!



### Buy direct from the factory.

Satisfaction guaranteed or money refunded. Every part carefully tested and inspected by radio experts.

This is your opportunity to make your own, efficient radio receiving set at small cost. Send full payment with order, or if you prefer, you may send deposit, and pay balance C.O.D., and we will ship any of the following radio parts at the bargain prices quoted:

	Regular Price	Special Price
Variometers.....	\$5.00	\$3.00
Vario Couplers.....	5.00	3.00
Transformers.....	5.00	3.00
23 Plate Condensers.....	3.60	2.25
43 Plate Condensers.....	4.50	2.75
Vacuum Tube Sockets.....	1.00	.65
Dials and Knobs.....	1.00	.65

### FREE Wiring diagram and blue print with every order.

This special bargain price offer is for a limited time only. Act at once! Remember—we guarantee satisfaction or refund your money. Circular mailed on request.

Write Dept. "B"

**METRO ELECTRIC CO.**  
1422-1438 Randolph St. CHICAGO

## EARN MONEY AT HOME

YOU can make \$15 to \$60 weekly in your spare time writing show cards. No canvassing or soliciting. We instruct you by our new simple Directograph system, pay you cash each week and guarantee you steady work. Write for full particulars and free booklet.

WEST-ANGUS SHOW CARD SERVICE  
63 Colborne Building Toronto, Can.



# California

## has a job for You

Come to sunny California, to Los Angeles, the city of your dreams.

### Learn Auto Trades In Coast's Biggest Schools

We'd like to take every page of this magazine to tell you how National Automotive has helped thousands of men to big pay auto jobs in California; how YOU can get a good job and earn big pay after a few short weeks training.

But we've told the story in a great big wonderful illustrated auto book. Send for YOUR copy—it's FREE.

### Your Success Is Sure After NATIONAL Training

Hundreds of men write: "I have increased my earnings 100%." "I have built a wonderful garage business, and owe it all to National." "I am well satisfied with National training; am sending my brother to take the course."

It's the National practical shop training that counts. Actual construction work on all types of motors. Ignition, battery and lathe work—driving and vulcanizing. Special advanced electrical course FREE. You KNOW autos when you complete the NATIONAL course.

Special Low Tuition offer now. Earn your room and board, and a little more, while learning. Living expenses low in California—and it's worth a million dollars to live there. Find out about everything in interesting illustrated auto book. Mail the coupon now.

**Send for Free Auto Book**

National Automotive School  
824 S. Figueroa, Los Angeles, Cal.

Please send me your 72-page illustrated auto book—absolutely FREE.

Name.....  
Street No. ....  
City..... State.....

The day in and day out efficiency of this inexpensive De Forest Radiohome Receiver with its range up to 100 miles is just a straw that shows which way the wind blows. Anything marked De Forest lives up to the reputation of that great name.

DE FOREST RADIO TEL. & TEL. CO.  
JERSEY CITY, N. J.



## Get Expert Training in DRAFTING Raise Your Income

HERE is a great and highly paid profession open to you. Learn Drafting now. No matter where you live or what you are doing you can become a master-draftsman by spare time study at home. No previous experience necessary. If you can read and write you can become a high-salaried expert draftsman by Chicago Tech's quick and easy method. In 20 years we have trained thousands who are now top-notchers in the drafting business.



### Building and Construction Lines are Booming. Get Busy

Drafting is the very foundation of building and construction lines. The architectural, structural steel, mechanical and electrical industries are calling for expert draftsmen. There is a boom coming in these lines—it's here now! This is a real opportunity. Learn Drafting now and get into the big pay class.

### Easy to Learn. Quick Results

By Chicago Tech's easy method you can learn Drafting quickly in your spare time right at home. Even though you cannot come and study Drafting in the day and evening classes of our big Chicago school, the same system of lessons used there with such pronounced success are sent to you. The same expert teachers guide you in your work at home.

**FREE Trial Lesson.** Shows you how readily you can learn Drafting by mail by the Chicago Tech. method. We send this lesson before you spend a penny or even decide about enrolling.

### FREE Radio Course

Latest up-to-the-minute Radio Course; just out. Tells how to build and operate your own set. We offer this big course FREE to you home-study students for limited time only.

### BUILDING EXPERTS WANTED

The Building Business is booming. Splendid opportunities are open. Big money will be made in the next five years by men in the building trades who know how to read plans, make estimates, superintend jobs, take contracts, etc.

### Special Offer for Men in the Building Trades

We have a special plan of great interest to Bricklayers, Carpenters, Plumbers, Plasterers, Foremen, Superintendents, Contractors and other men in building lines.

### Send Coupon for Free Book and Blue Prints

Mark "X" before "Building Trade Course" in the coupon if you have had experience in any building trade. We will send you free and post-paid a book of drawings and blue prints; also our big new book, "How to Read Blue Prints." Tell every builder you know to send for these books—they're free to men in the building trades.

### Let Us Send You This Big High Grade Drawing Outfit

We furnish this highest grade drawing outfit to our students in drafting.—no extra charge. Same tools in every particular that are used by high-salaried expert draftsmen.

### Act Now—Mail the Coupon

Big jobs are waiting. We can train you to fill them. It takes only a little of your spare time. No experience or previous education required. Put your name on the coupon and get full information; it costs you nothing.

#### CHICAGO TECHNICAL COLLEGE

1131 Chicago Tech. Bldg., Chicago, Ill.

Without cost or obligation on me please send instructive matter about opportunities in line I have marked with "X."

.... Drafting. (The Big Salary Course)  
no experience necessary.

.... Building Trade Course  
For men in the building lines.

.... Surveying  
and Map Drafting.

.... Automobiles  
Gas Engines, Starting, Lighting, etc.

.... Aeronautic Engineering  
All about aeroplanes.

.... Plumbing, Heating and Ventilating,  
Plan Reading, Estimating, etc.

.... Steam Engineering  
for Stationary Engineers.

.... Plan Reading for Shop Men  
for Machinists, Assemblymen, etc.

Name.....

Address.....

Post Office..... State.....

Free Trial Lesson Sent if Inquiry is on Drafting.

## STAMMER

If you stammer attend no stammering school until you get my large FREE book entitled "STAMMERING, Its Origin and The Advanced Natural Method of Cure," bound in cloth and stamped in pure gold. Ask for special tuition rate and a FREE copy of "The Natural Speech Magazine." Largest, best equipped and most successful school in the world for the cure of stammering. No sing-song or time-beat. School open all year. Now is the best time to enroll. Lee Wells Millard, Pres. The North-Western School, 2335 Grand Ave., Milwaukee, Wis.



Steady Work. No Layoffs.  
Paid Vacations.

Common Education Sufficient.  
Send Coupon Today—SURE.

Name.....  
Address.....

### DO YOU LIKE TO DRAW?

Cartoonists are well paid

We will not give you any grand prize if you answer this ad. Nor will we claim to make you rich in a week. But if you are anxious to develop your talent with a successful cartoonist, so you can make money, send a copy of this picture, with 6 cents in stamps for portfolio of cartoons and sample lesson plate, and let us explain.

The W. L. EVANS SCHOOL OF CARTOONING  
825 Leader Bldg. Cleveland, Ohio




GET  
**\$1600 to \$2300**  
A YEAR

Men—Boys over 16 should mail coupon immediately

Franklin Institute, Dept. J283, Rochester, N. Y.

Sirs: Send me, without charge; (1), sample Railway Mail Clerk Examination questions; (2), schedule showing places of coming U. S. Government Examinations; (3), list of many Government jobs obtainable.



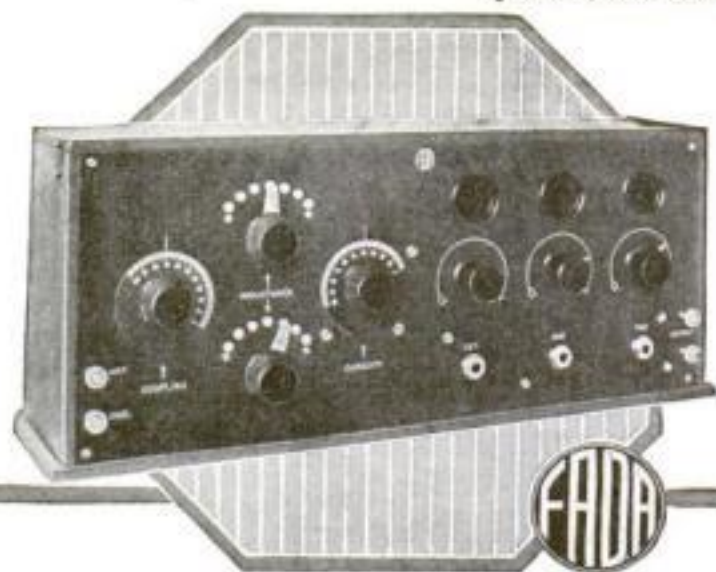

## Ideal for Christmas and Everyday of the Year

The Fada radio receiver, embodying the same perfection in design and construction that distinguishes all Fada products, makes an ideal Christmas gift for one who truly appreciates a fine instrument.

When it's radio time in your home, you can sit back in your favorite chair, among the family circle and command at your fingers' touch, the talent of such noted artists as May Peterson, Percy Grainger or Mme. Margaret Namara.

You marvel that their voices can come into your home with such depth of emotion and true personality. Music is an inspiration to everyone, it goes to the very soul of things, and brings joy and happiness to all.

With a Fada radio receiver "music from the clouds" can be made part of your home recreation. And after the musical program there is broadcasted a digest of important world events. A Fada receiver, literally keeps you a jump ahead of the headlines in tomorrow's newspapers.

*The new Fada handbook will be sent to you upon receipt of 5c to cover postage. It's a How-To-Do-It book that you should have.*

**Frank A. D. Andrea**

1581-K JEROME AVE. NEW YORK CITY

The Fada receiver, detector and two stage amplifier represents the highest type of cabinet construction. A fitting instrument for the finest home and instantly responsive to various receiving ranges.

**\$80.00**

"Let me send you this  
Fada Handbook."



**\$1.20**

**\$2.00**



**\$0.50**



**\$2.70**



## THE RADIO BOYS' SERIES

(Trade Mark Registered)

By ALLEN CHAPMAN

Each volume with a foreword by JACK BINNS



Boys everywhere hail these books with joy. They are filled with thrilling and absorbing interest and fine wholesome boyish sport. Girls find them fascinating too, they are such rattling good red-blooded stories. Of course they are woven about the new Radio-phones. "All the world's listening in." Handsome, individual, four-color jackets, cloth binding, well illustrated.

PRICE 50c at any bookstore  
60c if we send it

Here they are:

THE RADIO BOYS' FIRST WIRELESS  
THE RADIO BOYS AT OCEAN POINT  
THE RADIO BOYS AT THE SENDING STATION  
THE RADIO BOYS AT MOUNTAIN PASS  
THE RADIO BOYS TRAILING A VOICE

GROSSET & DUNLAP, Publishers  
1140 BROADWAY, NEW YORK

## LEARN ELECTRICITY IN 3 MONTHS



Make this the most profitable and enjoyable summer of your life. Come to Chicago, the electrical center and the country's greatest summer resort city. Learn Electricity in America's oldest, largest and best equipped school. Earn your way, free employment dept.

**FREE R. R. FARE**

If you come now we will pay your railroad fare and give you free a course in auto truck and tractor electricity, a course in radio, and a life scholarship in the great Coyne School. This is the greatest offer ever made by a school. Write at once for particulars as we cannot keep this offer open long.

Write  
Today

**Coyne**

Trade and Engineering Schools  
1300 West Harrison St., Chicago, Ill.  
Dept. 3X

## BUSINESS OPPORTUNITIES

EARN good income in your spare time. Mailing circulars, instructions, 10c. Box 5904, Bridesburg, Philadelphia, Pennsylvania.

HOME Bakin'—cakes, candies, jellies. Big profits. Information, 10c. G. Eva, 1202 W. Chelan, Spokane, Washington.

INCORPORATING a company? Save expenses and taxes by organizing on the popular, common law plan under a pure declaration of trust. Anyone, anywhere, can fill in Demaree Standard Forms, issue shares and begin doing business at once. Insist upon Demaree Forms, the original, nationally-accepted forms, approved and used by well known attorneys. Send for large, free pamphlet (C-56) containing much information that you will need. C. S. Demaree, Legal Blank Printer, 708 Walnut, Kansas City, Missouri.

INCREASE income spare time. Raise money quickly. Collect bills—cash. Interesting booklet "Skillful Collecting," free. National Collectors Association, Newark, Ohio.

668 WAYS to make money—2,716 formulas "Encyclopedia Business Opportunities." 3 volumes, \$1; Ideal Book Shop, 5501-VP, North Robey, Chicago.

START clothes cleaning shop; instructions, \$2. A. Barnes, Helena, Arkansas.

MAKE money at home making toys and novelties. Particulars free. New Specialty Company, 417 East 71st Street, New York.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## STAMPS AND COINS

CALIFORNIA gold  $\frac{1}{2}$  size, 27c;  $\frac{1}{4}$  size, 53c. White cent and catalogue, 10c. Norman Shultz, Colorado Springs, Colorado.

LIKE Triangular Stamps? To introduce our Sudden Service Approvals we'll send triangular Plume, set China ships, large \$1.00 United States revenue, also packet 50 foreign, millimeter scale, perforation, gauge, ruler and bargain lists—for only 9c. Pennell Stamp Company, Department C, Fullerton Building, St. Louis, Missouri.

1000 American hinges and 100 different stamps, 25c. 50 French Colonies, 30c. 50 Portuguese Colonies, 35c. Lists free. Fine approvals. Elwood D. Weber, 812 South Avenue, Plainfield, New Jersey.

158 Genuine Foreign Stamps—Mexico War Issues, Venezuela, Salvador and India Service, Guatemala, China, etc., only 10c. Finest approval sheets 50% to 60%. Agents wanted. Big 72-p. Lists free. We buy stamps. Established 29 years. Hussman Stamp Company, Dept. 55, St. Louis, Missouri.

STAMPS, 20 unused. All different, 3 cents. Mention paper. Quaker Stamp Co., Toledo, Ohio.

STAMPS—50 varieties, Africa, Brazil, Peru, Cuba, Mexico, etc., and Album 10c. 50 different U. S. 25c. 1,000 hinges, 10c. 1,000 mixed, 40c. List free. I buy stamps. C. Stegman, 5949 Cole Brilliante, St. Louis, Missouri.

UNUSED French Colonial stamps, 47 different, 20c. Nickles, 122 Florida Avenue, Washington, D. C.

OLD coins, large Fall selling catalogue of coins for sale free. Catalogue quoting prices paid for coins, ten cents. William Hesslein, 101A Tremont Street, Boston, Massachusetts.

17 VARIETIES Bulgaria stamps, 20 cents. List of 7,000 low-priced stamps free. Chambers Stamp Company, 111C Nassau Street, New York City.

200 DIFFERENT stamps, 20c. Lists free. Michael, 5602 Prairie, Chicago.

100 FOREIGN stamps, 10c; lists free. Harvey Teeple, Decatur, Indiana.

1500 DIFFERENT, \$5.00; 1000, \$2.50; 550, \$1.00; 300, \$.45. Fred Onken, 630 79th Street, Brooklyn, New York.

NEWFOUNDLAND Stamp Bargains! Lists sent. Rev. Butler, St. Georges, Newfoundland.

LARGE Copper Cent over hundred years old only 25 cents. Hundreds of other bargains. Fred Greenday, Box 297, Alton, Illinois.

SUPERIOR "Cent" approvals. Lloyd, 25 Cottage Street, South Orange, New Jersey.

TRY Gopher approvals. Priced net. Specify countries desired. Reference. Gopher Stamp Company, 3515 Third Avenue South, Minneapolis.

SAVE old stamps. Cole's approvals will satisfy. Cole, 3019 Wallace St., Chicago.

12c BRINGS 100 different cataloguing, \$2 or more, 250, hinges, perforation gauge, set war stamps, and trademore approvals. 50 French colonies 28c. 500 different foreign 90c. Trademore Company, 68 Radcliffe, Dorchester, Massachusetts.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager Classified Advertising, Popular Science Monthly, 225 West 39th Street, New York.

## BOOKS

"TWENTIETH CENTURY BOOK OF RECIPES, FORMULAS AND PROCESSES"—This book gives you the information that represents the collection of years and the expenditure of thousands of dollars. Contains complete directions of making everything from simple glazes and adhesive to the tanning of leather, the making of photographic materials, perfumes, soaps, plating of silver and gold, working of metals, etc. 800 pages, 10,000 selected subjects. Price \$4.00. Book Department, Popular Science Monthly 225 West Thirty-ninth Street, New York.

DO you have the 110-volt alternating current in your home? Would you like to know something about the most common form of electricity in commercial use? Then get a copy of Adams' Experiments with 110-Volt Alternating Current. You will be amazed when you learn how many interesting experiments can be performed with home-made apparatus and how in a short time you can become thoroughly familiar with the 110-volt alternating current. 135 illustrations showing exactly how to make the apparatus and perform the experiments. Price, postpaid, \$1.75. Popular Science Monthly, 225 West 39th Street, New York.

WIRING is made easy for anyone with an elementary knowledge of electricity by the use of Sengstock's Electricians' Wiring Manual. Just follow the simple instructions in this manual and Do Your Own Wiring. The book is written in plain English within the grasp of any one. You need not worry about your wiring passing inspection if you have this manual. Pocket size, flexible binding. Price, postpaid, \$2.50. Popular Science Monthly, 225 West 39th Street, New York.




# "NERVES"

A Subtle and dangerous malady which is undermining the vitality of the American Nation

By PAUL von BOECKMANN

"NERVES"—We hear it everywhere. The physician tells his patient—"It's your Nerves." Sensitive and high-strung women complain of their "Nerves." You see evidence of "Nerves" everywhere—in the street, in the cars, in the theatre, in business, and especially in your own home—right in your own family. We Americans are a nation of nervous people. This is known the world over. Our own Nerve Specialists admit it. It is caused by our "Mile a-minute" life; the intenseness of our Natures in everything we do. It is making us the most progressive nation on earth, but it is also wrecking our people. Our crowded insane asylums prove it. Medical records prove it. Millions of people have subnormal Nerve Force, and consequently suffer from endless organic and physical troubles, which make their lives miserable. What is meant by "Nerves?" By "Nerves" is meant Nerve Exhaustion (Neurasthenia), lack of Nerve Force. What is Nerve Force? We might as well ask, "What is electricity?" We do not know. It is the secret of Nature. We do know that it is the vital force of life, a mysterious energy that flows from the nervous system and gives life and energy to every vital organ. Sever the nerve which leads to any organ and that organ will cease acting.

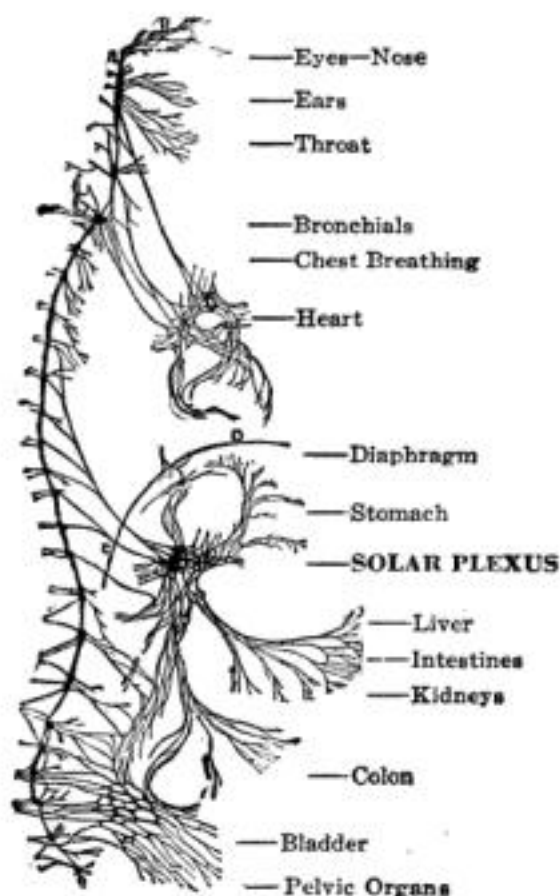

The Sympathetic Nervous System

Showing how Every Vital Organ is governed by the Nervous System, and how the Solar Plexus, commonly known as the Abdominal Brain, is the Great Central Station for the distribution of Nerve Force.

The wonderful organ we term the Nervous System consists of countless millions of cells. These cells are reservoirs which store Nerve Force. The amount stored represents our Nerve Capital. Every organ works incessantly to keep the supply of Nerve Force in these cells at a high level, for Life itself depends more upon Nerve Force than on the food we eat or even the air we breathe.

If we unduly tax the nerves through overwork, worry, excitement, or grief, if we subject the muscular system to excessive strain, or in any way consume more Nerve Force than the organs produce, the natural result must be Nerve Bankruptcy, in other words, Nerve Exhaustion, Neurasthenia, or "Nerves." There is but one malady more terrible than Nerve Exhaustion—

its kin, Insanity. Only those who have passed through a siege of Nerve Exhaustion can understand the meaning of this statement. It is HELL; no other word can express it. At first, the victim is afraid he will die, and, as it grips him deeper, he is afraid he will not die—so great is his mental torture. He becomes panic-stricken and irresolute. A sickening sensation of weakness and helplessness overcomes him. He becomes obsessed with the thought of self-destruction. Nerve Exhaustion is not a malady that comes suddenly. It may be years in developing and the decline is accompanied by unmistakable symptoms, which can readily be recognized.

The symptoms of Nerve Exhaustion vary according to individual characteristics, but the development is usually as follows:

**FIRST STAGE:** Lack of energy and endurance; that "tired feeling" especially in the back and knees.

**SECOND STAGE:** Nervousness; sleeplessness; irritability; decline in sex force; loss of hair; nervous indigestion; sour stomach; gas in bowels; constipation; irregular heart; poor memory; lack of mental endurance; dizziness; backache; headaches; neuritis, rheumatism, and other pains.

**THIRD STAGE:** Serious mental disturbances; fear; undue worry; melancholia; dangerous organic disturbances; suicidal tendencies, and, in extreme cases, insanity.

How often do we hear of people running from doctor to doctor, seeking relief from a mysterious "something the matter" with them, though repeated examinations fail to show that any particular organ is weak or diseased? How often do we hear of people racking their brains trying to discover the reason of their failure in business, in a profession, love, or any undertaking? They would give anything to lay their finger on the stumbling block of their lives—the door that locks out their ambitions, the wall that blocks their progress. The answer is: Lack of Nerve Force. In short, Nerve Force means Life Force—Brain Force—Vital Force—Organic Force—Dynamic Force—Personal Magnetism—Manliness and Womanliness.

No man WITH Nerve Force has ever stood in a bread line.

No man WITH Nerve Force has ever been down and out.

No man WITH Nerve Force has ever acknowledged himself "licked."

No man WITH Nerve Force has ever failed to attain success.

This, of course, applies to women as well as men. And, on the other hand, WITHOUT Nerve Force no person of either sex in any walk of life has ever reached the top, has ever achieved success, or has ever gotten the fullest enjoyment from life itself. WITHOUT an abundant supply of Nerve Force our lives are wrongly adjusted, we fail to utilize our full powers, and we cheat ourselves of our birthright of health and vigor.

"A sound mind in a sound body" depends upon sound nerves. And to be a WINNER, even in a small way, demands, first of all—NERVE FORCE. If your NERVES have reached any of the three stages of depletion, you ought to take immediate steps to determine the cause and to learn what to do to build up your Nerve Force.

I have made a life study of the mental and physical characteristics of nervous people, having treated more cases of "Nerves" during the past 25 years than any other man in the world (over 90,000). My instruction is given by mail only. No drugs or drastic treatment of any kind are employed. My method is remarkably simple, thoroughly scientific, and always effective. I shall agree to send you further information regarding my system of treatment FREE and without any obligation on your part. Everything is confidential and sent sealed in a plain envelope.

You should read my 64-page book, "NERVE FORCE." The cost of this book is only 25 cents (coin or stamps). The book is not an advertisement of any treatment I may have to offer. This is proved by the fact that large corporations have bought and are buying this

book from me by the hundreds and thousands for circulation among their employees—Efficiency. Physicians recommend the book to their patients—Health. Ministers recommend it from the pulpit—Nerve Control, Happiness. Never before has so great a mass of valuable information been presented in so few words. It will enable you to understand your Nerves, your Mind, your Emotions and your Body for the first time.



PAUL von BOECKMANN

... Author of Nerve Force and scores of other books on Health, Psychology, Breathing, Hygiene and kindred subjects. Over a million of his various books have been sold during the last 25 years.

Prof. von Boeckmann is the scientist who explained the nature of the mysterious Psycho-physic Force involved in the Coulton-Abbott Feats, a problem that had baffled the leading scientists of America and Europe for more than thirty years, and a full account of which has been published in recent issues of Physical Culture Magazine.

Read the book at my risk, that is, if it does not meet with your fullest expectations, I shall refund your money PLUS your outlay for postage. My advertisements have been appearing in this and other standard magazines for more than 20 years. This is ample evidence of my integrity and responsibility.

The following extracts are quoted from letters written by people who have read the book:

"I have gained 12 pounds since reading your book, and I feel so energetic. I had about given up hope of ever finding the cause of my low weight."

"I have been treated by a number of nerve specialists, and have traveled from country to country in an endeavor to restore my nerves to normal. Your little book has done more for me than all other methods combined."

"Your book did more for me for indigestion than two courses in dieting."

"My heart is now regular again and my nerves are fine. I thought I had heart trouble, but it was simply a case of abused nerves. I have reread your book at least ten times."

A woman writes: "Your book has helped my nerves wonderfully. I am sleeping so well and in the morning I feel so rested."

"The advice given in your book on relaxation and calming of nerves has cleared my brain. Before I was half dizzy all the time."

A physician says: "Your book shows you have scientific and profound knowledge of the nerves and nervous people. I am recommending your book to my patients."

A prominent lawyer in Ansonia, Conn., says: "Your book saved me from a nervous collapse, such as I had three years ago. I now sleep soundly and am gaining weight. I can again do a real day's work."

PAUL von BOECKMANN,  
110 West 40th St., Studio 167, New York, N. Y.

Dear Sir: I desire to investigate your method, without obligation of any kind. (Print name and address plainly.)

Name.....

Address.....

Enclose 25c if you wish the book.



'Without going out of doors,'  
said Lao Tzu,  
'one may know the  
whole world!'

"Let  
a Grebe Receiver

bring the whole  
world to your  
evening fireside."

*Doctor Mu.*








## How Thrilling New Sport of Aerial Yachting May Develop from Recent Sailplane Contests

*Famous Airman Predicts Astounding New Era of Popular Flight*

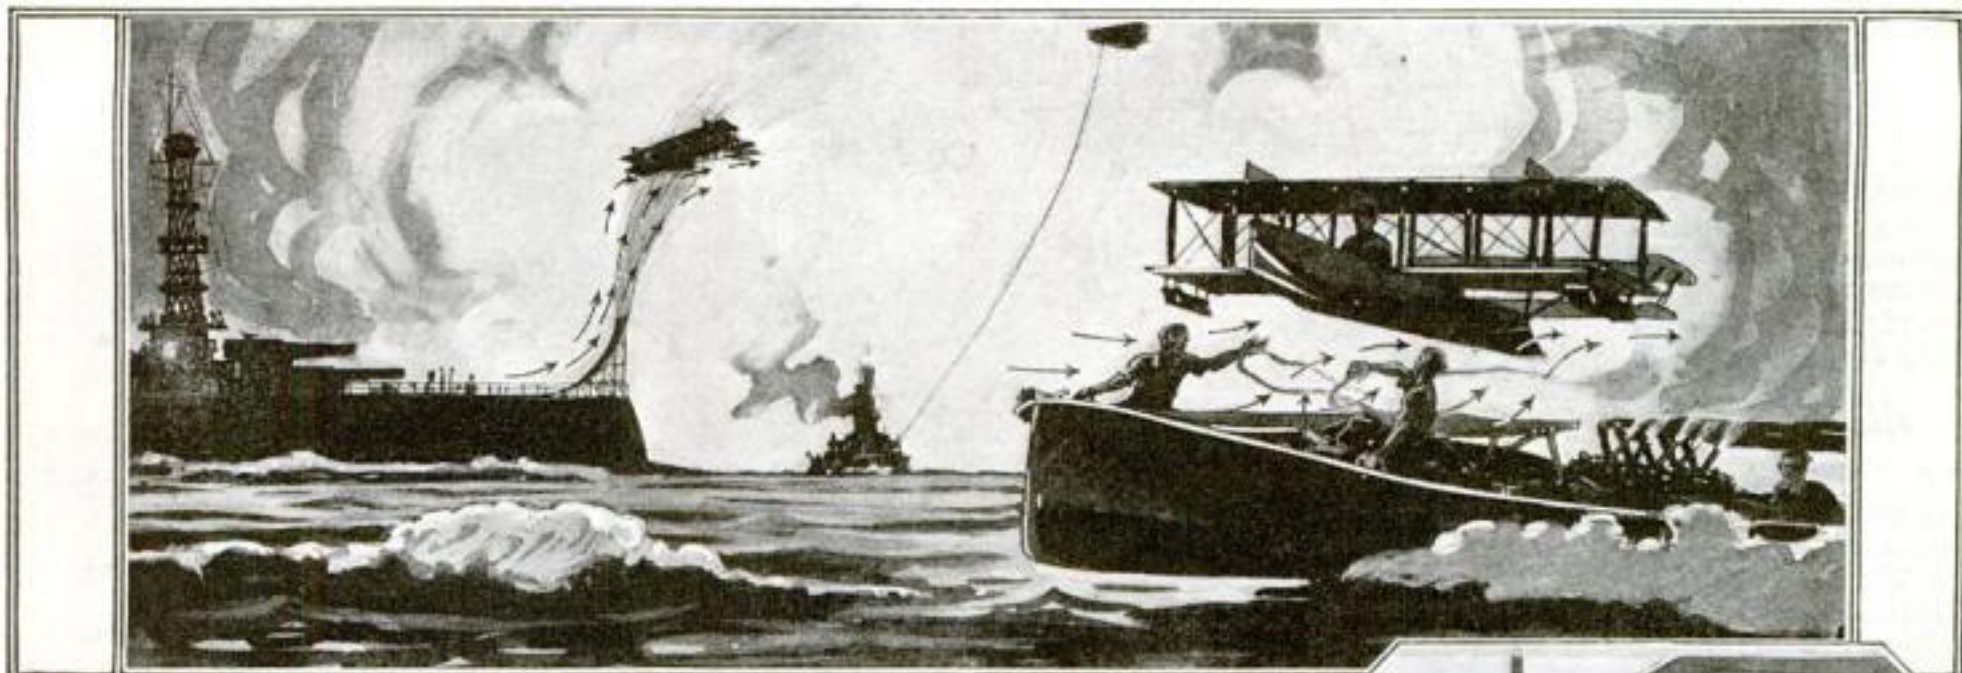

In the following article, Augustus Post, leading American aeronautic expert, discusses the amazing future of soaring flight, as revealed since the records made by German sailplane pilots in the Rhön valley, a few weeks ago.

Glenn Curtiss has been one of the first on this side of the Atlantic to follow up the German exploits, and Mr. Post's vision of the possibilities of the Curtiss sailplane is

pictured above. He believes the Navy may make use, for training purposes, of sailplanes launched from battleships, and riding on air currents in their wake; that motorless planes may be towed by a warship, like kites, to serve as observation posts for the direction of gunfire; and that, finally, for sport, a sailplane may be carried or towed by a swift power boat until it gains speed enough to rise and soar



Glenn H. Curtiss, inventor of the flying boat and father of commercial aviation in America, with his revolutionary sailplane. In recent successful tests, this remarkable 150-pound craft, towed by a power boat, rose and soared above the water, as shown at the right of the upper picture. The hull is of duralumin, exceedingly light and strong, while the wings are silk covered

By Augustus Post

Secretary, Aero Club of America

**M**AN has never really flown; he has only made machines that fly.

From the time when the Greek myths told how Icarus flew so near the sun that the wax holding his wings was melted, to the time that Leonardo da Vinci, the great Italian painter, drew plans for mechanical wings, even to the day of "Langley's Folly," men have dreamed of human flight. But all they have lately accomplished is to make high powered machines able to lift themselves into the air and carry men up with them.

But a new era has begun. Man has learned actually to fly without motor power. The vision of Otto Lilienthal, pioneer student of flying, the dream of the Wright brothers when they began their experiments at Kitty Hawk, have become a reality.

When, a few weeks ago, the young German sailplane pilot, H. P. Hentzen, soared in a motorless sailplane high over the German countryside at Gersfeld in the Rhön mountains, remaining aloft




Augustus Post in the car of the balloon, "New York," at 20,000 feet, during flight that established duration record of 48 hours, 26 minutes. (See note, page 27)

for more than three hours and descending only "on account of darkness," the astounded world realized that something brand new in aviation, practical and far-reaching in scope, had come to stay. Do you grasp the full significance of the exploit? Without an engine, with only piloting skill and knowledge of wind currents, this young bird-man—for the first time the name really fits—actually hovered and soared over the landscape for as long as it takes a



# The Evolution of Flight—From Dreams of Birdlike Soaring,

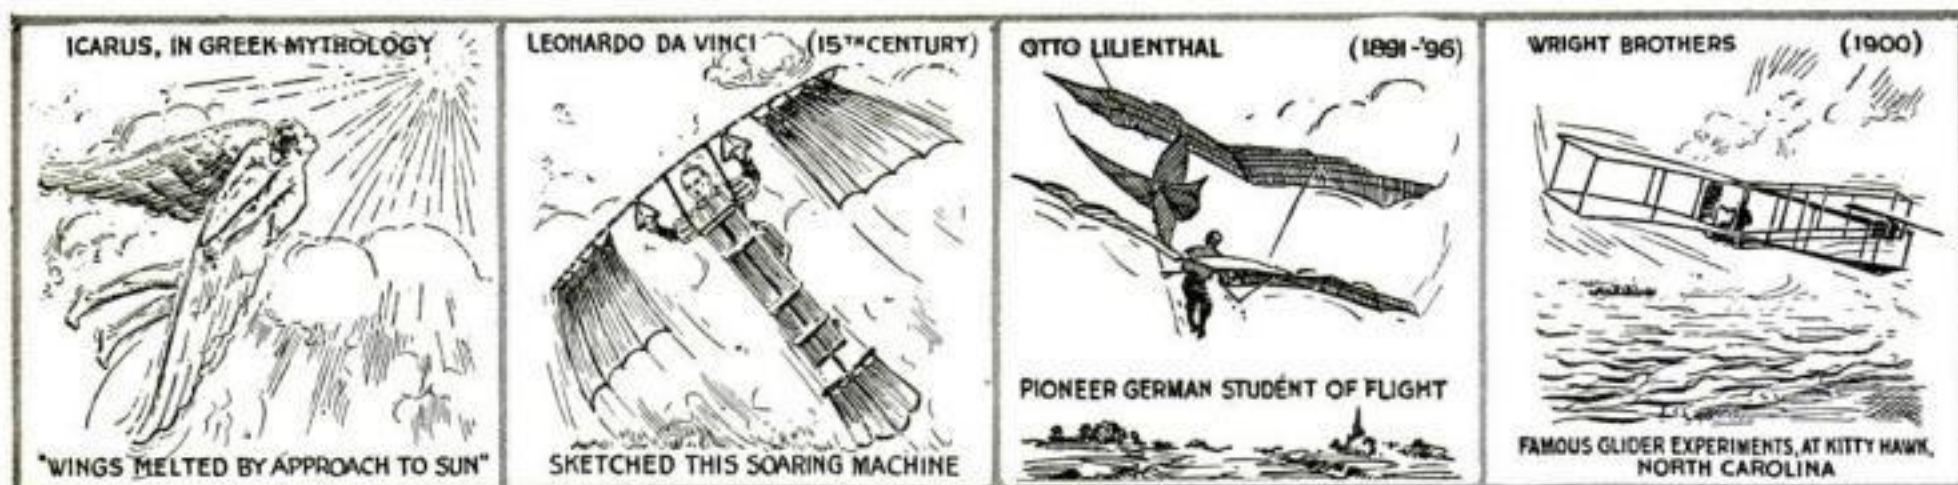


fast train to travel from Albany to New York City. And he landed more than 1100 feet above his starting point!

Only a few years ago the feat of remaining aloft for a few moments, after gliding downward from the top of a high hill, was considered remarkable. Soaring for a quarter of an hour, last year in Germany, was thought amazing; but this year the young technical students, Hentzen, Johann Martens, and others, climbing and hovering like birds for hours instead of minutes during the Rhön contests, have simply staggered us.

## Air Yachting as Popular Sport

I doubt whether the public fully realizes just what these epoch-making adventures of 1922 mean to aviation. To my mind, they mean that the science of aviation begins all over again; and this time anybody will have as good a chance to own a flying machine and to run it himself as he now has to own and run an automobile. I, for one—looking ahead to the day when, with light motors added to these revolutionary sailplanes, there will be perfected a flying craft costing little more than an automobile—risk the guess that flying will become a popular health-giving sport. While not so common as motoring perhaps, this thrilling sport will be much more common than yachting, for the yachtsman must live by sea or lake, while the flyer finds the air and winds everywhere.

Gliders, as now developed, are small motorless airplanes—either monoplanes, biplanes, or multiplanes—made of light wood, metal and cloth. The ingenious new seagoing sailplane recently perfected and successfully tested by Glenn H. Curtiss, pioneer of commercial avia-

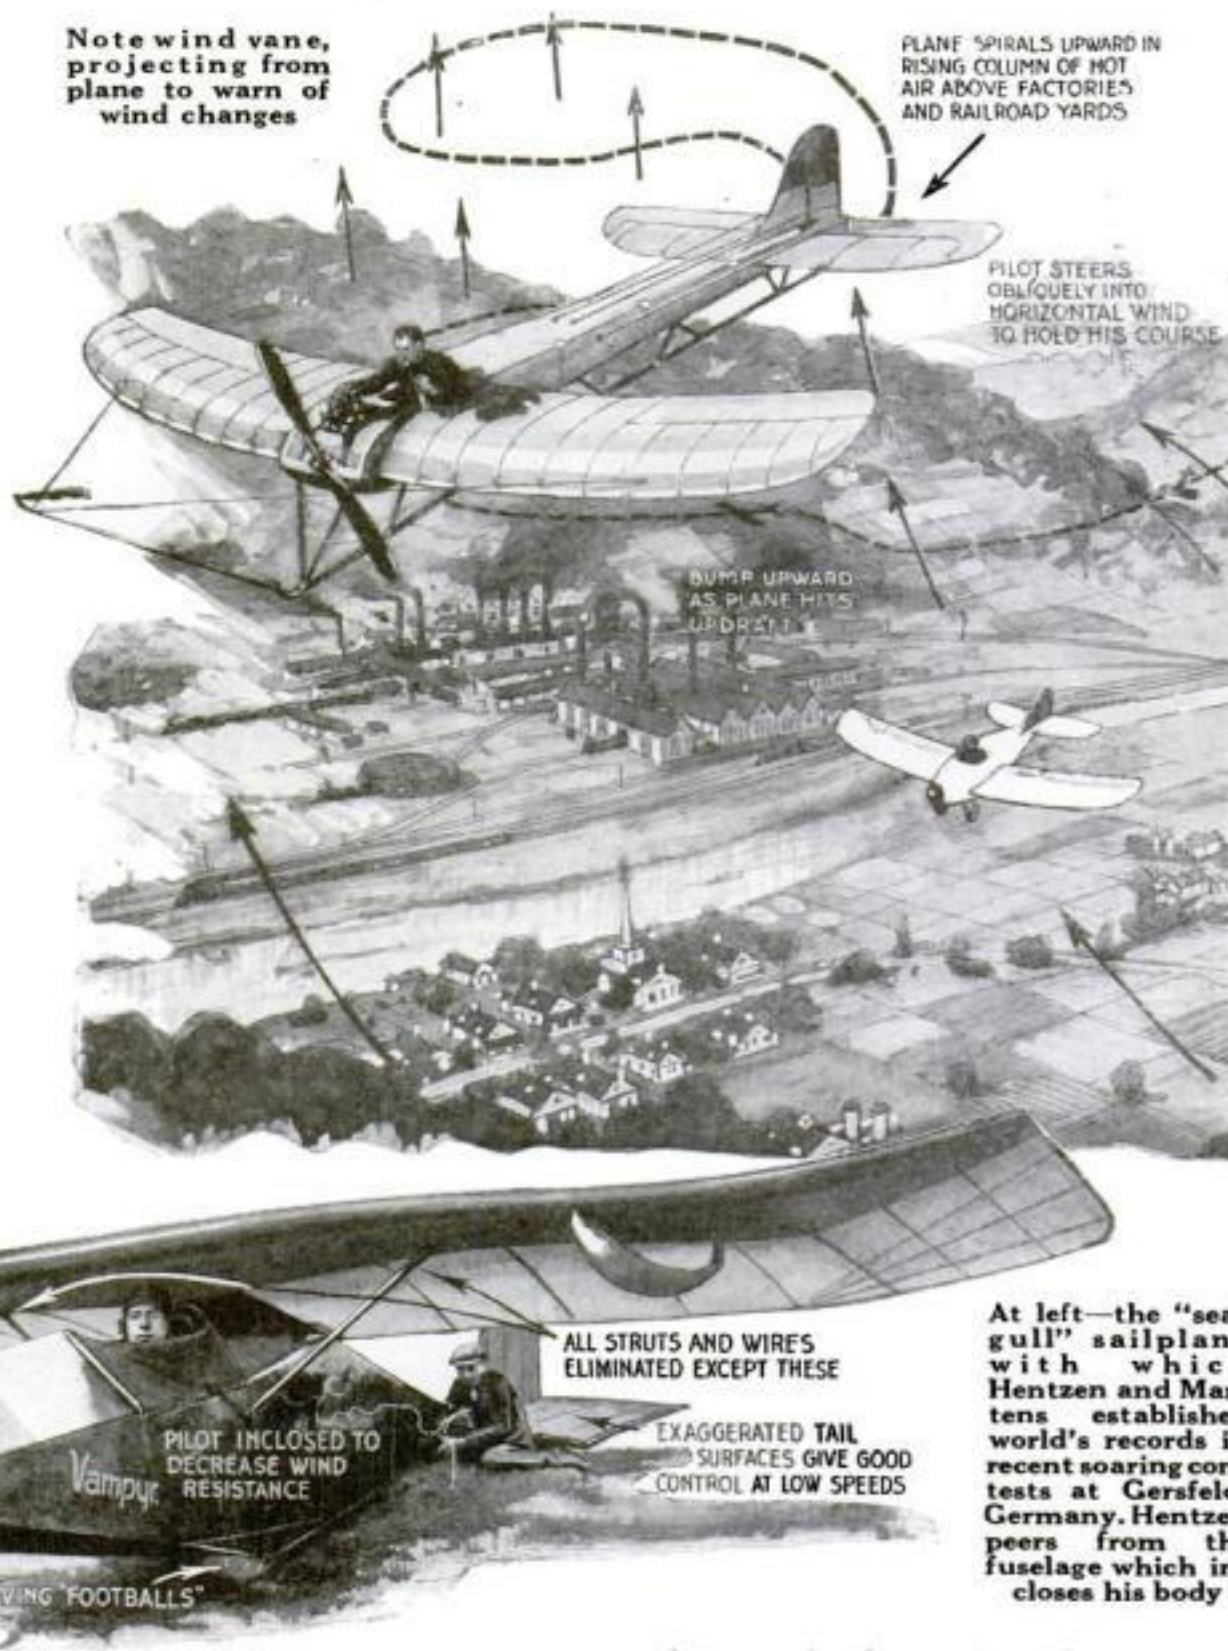

Note revolving "footballs," replacing wheels or skids for landing

tion in America, has a hull of duralumin, a metal more than twice as strong and as light as aluminum. In some types of sailplanes the pilot sits in the fuselage or body, as in the cockpit of an airplane; in others he sits in a seat beneath the wing. In each case he operates rudder, ailerons, and elevators as in an airplane, and in some machines even the wings may be adjusted by the pilot to gain a better balance for the machine.

The record breaking "air yacht" Vampyr, used by the students Hentzen and Martens at Gersfeld, resembles in the air a

huge, ungainly, angular seagull. In structural detail the single deck plane is closely modeled after soaring and skimming birds. Extreme curvature of the wings gives remarkable lifting power at low speeds, while the ends of the wings consist of warpable surfaces, controlled from the pilot's seat, by means of which the tapering wings are instantly adjusted to varying air currents.

To decrease wind resistance, the pilot is inclosed in the streamlined fuselage, which terminates in a steering tail. Only his head is exposed. The center of the wings, just above the pilot, is often curved to an arch,

a feature of wing construction adapted from nature's models.



The hop-off of the Vampyr for its record flight is typical of the manner in which a sailplane, as now constructed, takes the air. As the machine takes its place on the slope of the Wasserkuppe, highest hill in the Rhön range, each of three husky fellow students of the pilot holds the end of a rope that is thrown through a hook just beneath the machine's nose. After some jockeying with the wind, the pilot, picking a favorable moment, signals for the start, and the three students run down the hill, facing the wind, hauling the sailplane behind them. With a slight lurch, the wings catch the air;



# through Powered Flying, Back to Soaring Again



AS THE culmination of a quarter of a century of soaring experiments and powered flight, comes the popular priced air yacht (below), now manufactured in Germany. This sailplane is being marketed, with or without nine horsepower motor, at prices ranging from \$100 to \$650

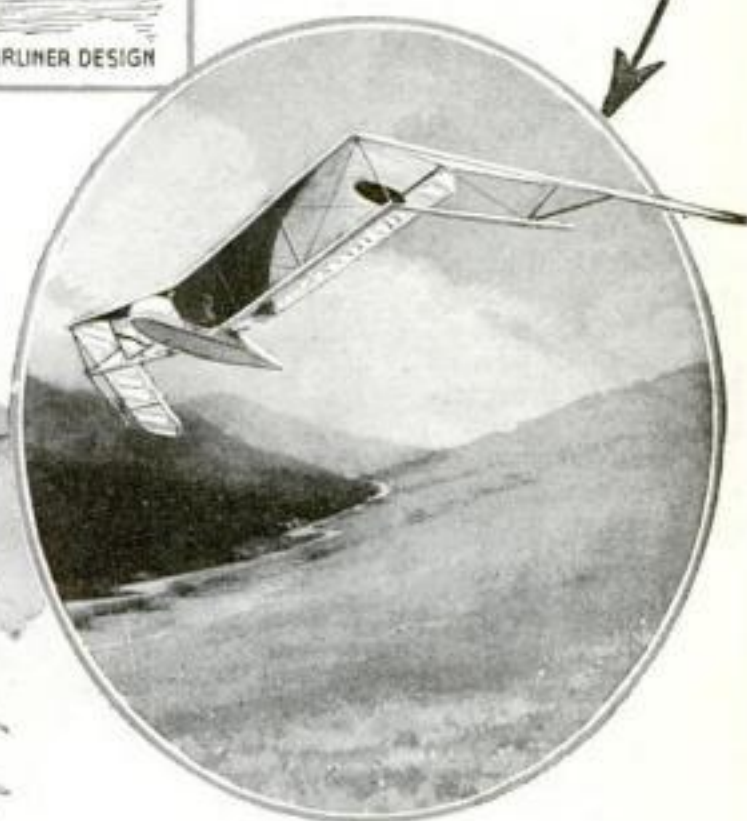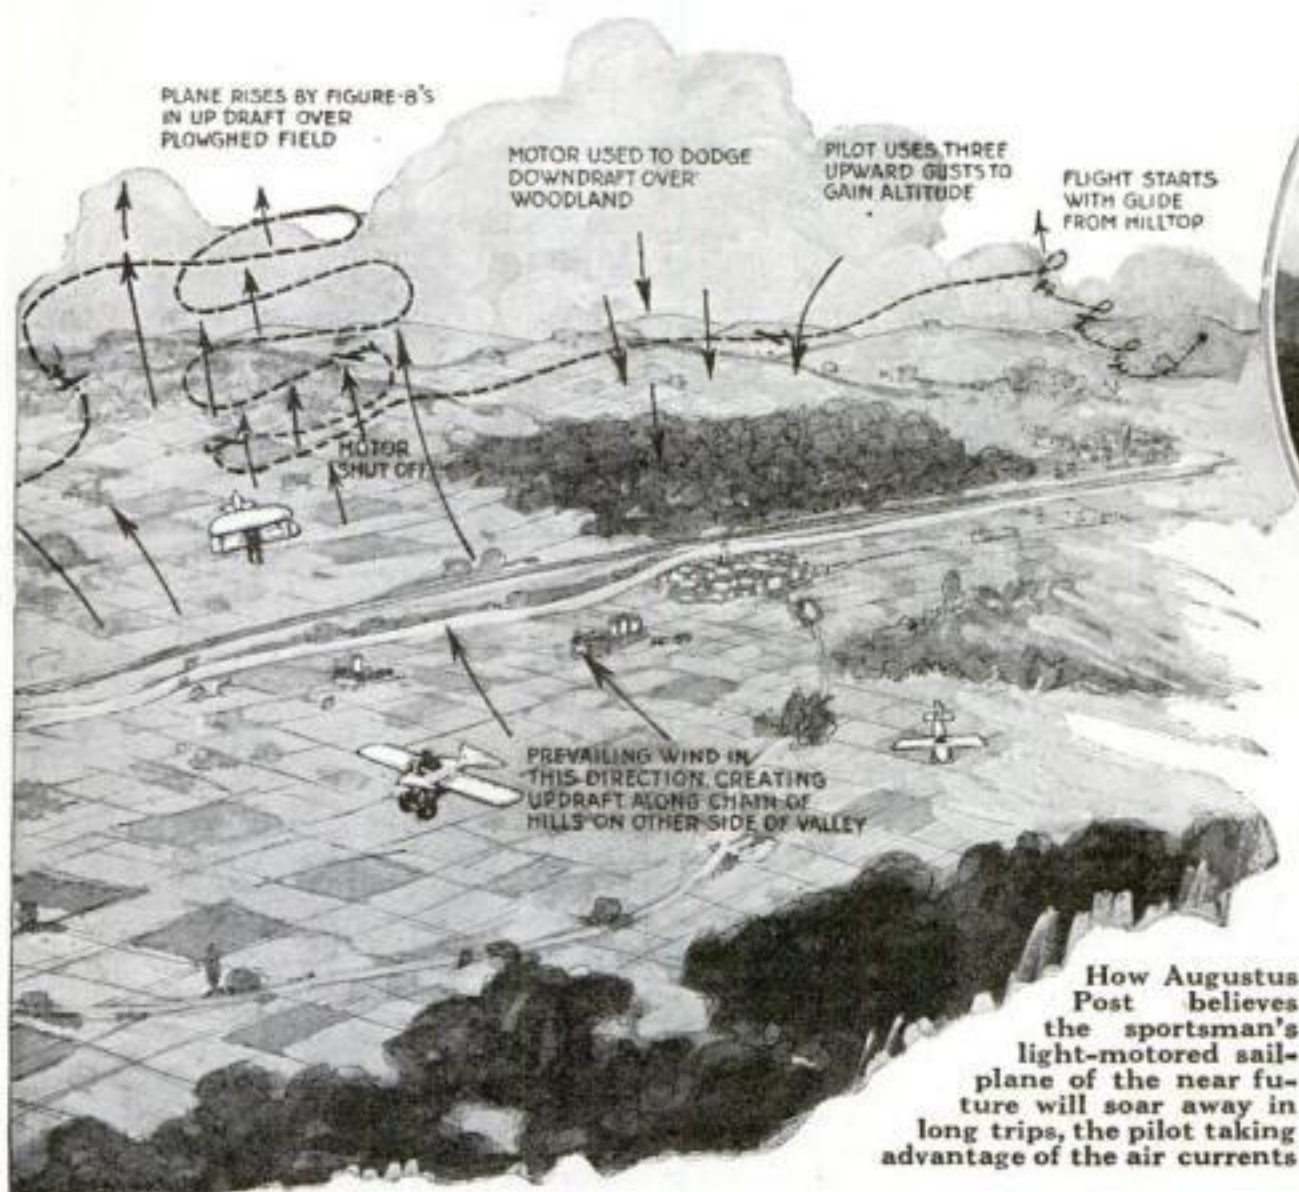

the ropes are jerked clear of their hook, and the plane soars away, on a level course, to the crest of the next hill where, catching a new current, it rises higher, then descends slightly until another current is encountered.

Assuming that some day—and that day may be soon—you will pilot your own sailplane, how will you guide it? How will you travel and climb in such a craft? What will make it go?

The motor power you will use in "soaring" or "sailing" flight will be derived from using the force of air gusts within the wind and the energy of rising air currents to offset the action of gravity. You will find two kinds of wind suitable for soaring. First, winds that blow upward, due to the slope of the ground—such as the slope of a hill, mountain, ridge, or range of mountains—also rising columns of air over heated areas on the ground—such as plowed fields, deserts and exten-

sive manufacturing districts. Second, horizontal winds with strong gusts.

Rising in a vertical wind is not, properly speaking, "soaring"; it is really the same as ordinary gliding flight, except that the wind is blowing upward. True soaring flight—the aim of all the present experiments—uses the energy of a gusty wind, generally horizontal, to soar over prac-

tically level ground. The long flights by Martens and Hentzen were combined soaring and gliding flights, thrilling accomplishments of skill that lend the most intense interest to the new sport of "air yachting." All the nautical terms such as "tacking," "running free," "before the wind," may be applied, with modern improvements, to this new three-dimension sport. Herr Klemperer, whose duration records of 1921 were described in a recent issue of POPULAR SCIENCE MONTHLY, says that piloting a soaring machine is quite different from flying an airplane with a motor, but that a good airplane pilot might have the advantage of air experience over the novice.

Certain it is that success in "air yachting" requires complete mastery of the knowledge of air currents and meteorological conditions in order to make instant decisions in difficult situations and to take advantage of the variations of wind speed in the form of gusts representing energy available for soaring. The pilot must so maneuver that there will be a constant wind speed behind his machine, thereby using the energy liberated from the gusts to perform the work necessary for flight. Because we cannot "see" air, such maneuvers are difficult, for we do not know the exact form, periodicity, duration, or relative strength of the gusts.

The best gusts for soaring are those with a long period of increasing speed, followed by one of constant maximum, then gradual decrease and finally a period of minimum strength.

(Continued on page 94)

## Augustus Post Knows the Secrets of the Air

THIS article represents the first really authoritative magazine contribution in this country in reference to the amazing record of the German sailplane fliers, to come from an expert who, both as writer and aeronaut, stands among the nation's leaders. Augustus Post can explain and predict the astonishing possibilities of soaring motorless through the air because he *knows* the air, "inside and out."

Mr. Post, one of the founders of the Aero Club of America, has himself built and operated gliders; he was associated with the Wright brothers in their early experiments; he organized the first international balloon race in St. Louis, in 1907; and he holds America's record for distance of balloon travel in a single flight.

As lecturer, writer and organizer, he has been a leader preëminent in the development of all forms of aeronautical activity in this country, and his extensive ballooning experience—in the course of which he was compelled to study air currents as few pilots of airplanes have to—has put him in position to explain, as he vividly does in this article, the secrets of the astonishing soaring experiments in Germany.



# How Plant Hunters Risk Lives to Find New Foods for Your Table

By E. L. Jones, from an exclusive interview for POPULAR SCIENCE MONTHLY with Henry C. Wallace, Secretary of Agriculture


**T**HEIR achievements almost unnoticed by the very public that has gained wealth and a wider choice of wholesome food through their efforts, a little band of globe-trotting plant hunters from the United States Department of Agriculture, has succeeded in the past 25 years in locating in foreign countries, and introducing into this country, more than 51,000 lots of grains, fruits, forage crops, vegetables and plants regarded as worthy the attention of American plant breeders and experimenters.

Almost every year, one or more of these new crops appears

for the first time in the list of America's valuable farm products. In December, 1921, the grain known as durum wheat, first brought to this country from Russia, had a value of about \$30,000,-



Above: Dr. David Fairchild, father of Uncle Sam's Service of Foreign Seed and Plant Introduction, of which he is now director. Giant bamboo forests in California, for which Doctor Fairchild sent from China the first cuttings 25 years ago, are living monuments to his work, while the mango, India's "sacred fruit," now being grown in our own South, is gradually winning popular favor as a result of Doctor Fairchild's efforts

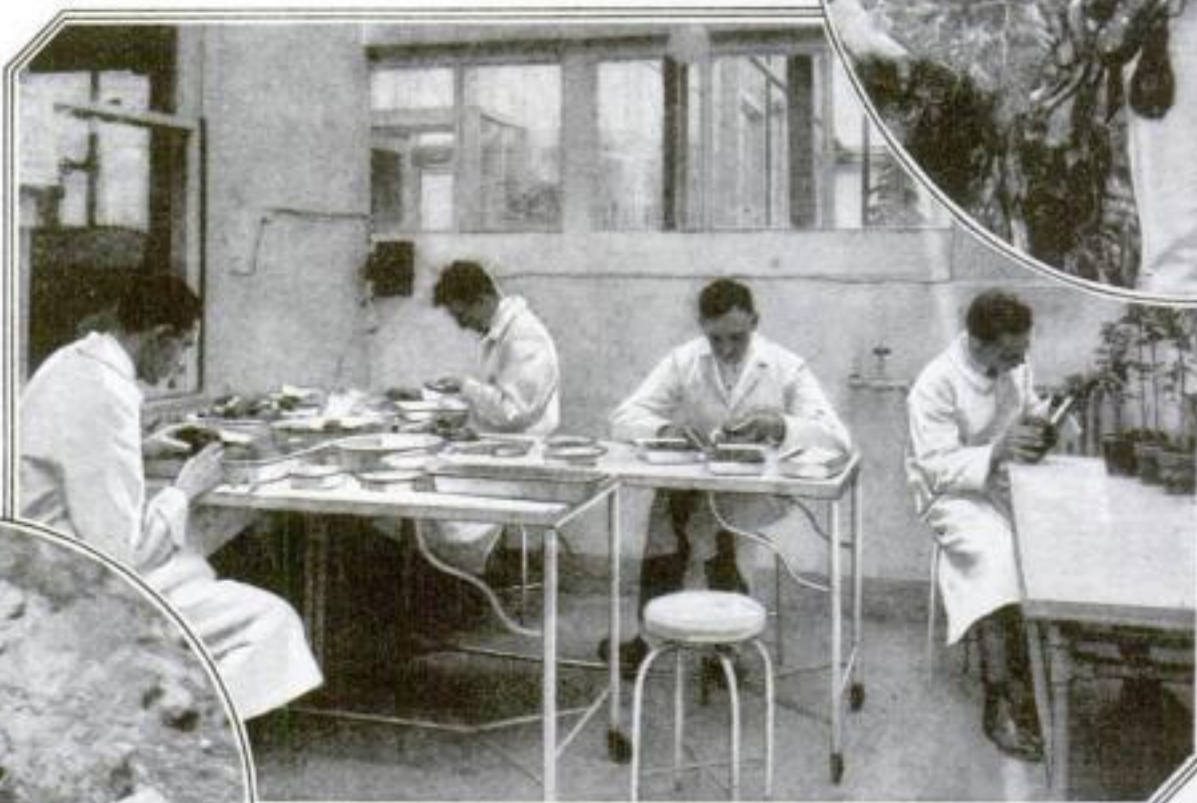

© Harris & Ewing

## An "Ellis Island" for Immigrant Plants

**H**UNDREDS of food delicacies have passed through this fumigated laboratory in the Department of Agriculture, Washington, and become citizens of American soil. It is here that seeds and roots, sent from all over the world by our plant hunters, are examined for insects or diseases that might prove dangerous if admitted.

According to Doctor Fairchild, Uncle Sam's pioneer plant explorer, if one per cent of the money spent in advertising chewing gums or breakfast cereals could be applied to advertising the varied vegetable immigrants thus introduced, the American dinner table would boast scores of new, cheaper, and more wholesome foods. Among the new crops that are still neglected by the general public simply from habit or lack of knowledge of their advantages, are the following:

Guatemalan avocado, a fruit more nourishing than bread or rice; Guatemalan chayote, a vegetable resembling our squash; dasheen from the West Indies, a potato-like root crop that grows in sections of the South where potatoes will not thrive; Colombian giant blackberry, the world's largest edible berry, growing to a length of 2½ inches; Andes berry, like the raspberry in growth, with fruit resembling our blackberry; Andean cherry, large and sweet; pejiabaye, a Costa Rican plum, the size of an apricot and resembling the chestnut in character and flavor; telferia, a gourd seed from German East Africa, about one inch in diameter and tasting like our butternut; soy bean from China and Japan, nutritious, rich in oil, with nutty flavor; Indian mango, a fruit with combination apricot and pineapple flavor

000 on the farm. Egyptian cotton, to name a second discovery of the plant hunters, yearly enriches Southwestern planters by more than \$6,000,000. Still other products, such as Japanese rice and Sudan grass, add annually another \$25,000,000 to the producing value of the soil.

These Columboes of the plant world know the remote places of the sphere as few real explorers can. They travel through tropical jungles where boa constrictors, tigers, lions and leopards lie in wait for human prey. They travel on foot



Dr. Frank N. Meyer, a pioneer plant hunter, who for nine adventurous years enriched American gardens with innumerable choice plants and flowers, and finally perished while seeking new foods for us in a remote corner of Asia

### EGYPTIAN COTTON



\$6,000,000  
YEARLY CROP

### JAPANESE RICE



\$16,000,000  
YEARLY CROP

### DURUM WHEAT



\$40,000,000  
YEARLY CROP

### SUDAN GRASS SORGHUMS, ETC.



\$105,000,000  
YEARLY CROP

THE FARMER'S  
ANNUAL  
\$167,000,000 CROP  
FROM A FEW "FINDS"  
MADE BY UNCLE SAM'S  
ADVENTUROUS  
PLANT HUNTERS





### Vegetable Ice Cream

From the South American Andes, the cherimoya, or "vegetable ice cream," was introduced into this country by Wilson Popenoe (center) and now flourishes in California. The inner part of the vegetable, a creamy white substance, blends pineapple and banana flavors



### Fruit from Guatemala

Introduced by Wilson Popenoe, the Guatemalan avocado, or alligator pear, of which fine specimens now being grown in California and Florida are declared to be remarkable delicacies and far superior to the alligator pears that prematurely reached the market a few years ago

through swampy terrain, where the chances of escaping the jungle fevers are 99 to one against the white man. Their only goal, through all the suffering and privation, is a mere plant which, if introduced into the agricultural life of America, may add, it is hoped, to the farm wealth and food resources of the country.

Despite myriad dangers, the intrepid plant hunters of the United States Department of Agriculture are constantly penetrating the wildernesses of Africa, China, Manchuria, the Philippines, South America, Egypt, and elsewhere, veritably combing these distant regions for samples of native plant treasures that may be introduced to America and tested out on our soil. If the new products are found satisfactory, they are added as permanent assets to our crop schedules in those sections of the country where they prosper. The range of climatic, soil, and topographical conditions in the United States is so wide and varied that practically every crop or plant that can be grown anywhere else in the world can be raised successfully in some part of the United States. Some of our agricultural lands that previously were relatively cheap

### Five Thousand Miles on Muleback

Wilson Popenoe, one of the most persistent of Uncle Sam's plant hunters, who for the past 10 years has been traveling through tropical America in search of new fruit varieties. In his quest he has ridden at least 5000 miles on muleback, as shown above, usually with only an Indian companion

and unimportant, have been made valuable as a consequence of the introduction of certain foreign crops that were found to be ideally adapted to the particular soil and climate of the region.

Farmers in the north plains states (North and South Dakota, western Minnesota and Montana) depend largely on the high-yielding durum wheat that was first introduced from Russia (it constitutes 15 per cent of the spring wheat crop). The area devoted to this crop averages 3½ million

acres. In 1921 it was almost five million. In the past five years, the quantity raised annually has ranged from 26,000,000 to 50,000,000 bushels. The average annual production, at one dollar a bushel, would amount to \$40,000,000.

California is now able to market in excess of 13,000,000 boxes of navel oranges annually, as a result of the introduction of this fruit from Brazil. Our average Japanese rice crop of over 47,000,000 bushels, in the past three years, is valued at an average of \$16,000,000 a year. The comparatively small sum that the government spent in studying, introducing and establishing this industry was well invested.

Corn would never grow satisfactorily in the southwestern and plains states. The importation of Sudan grass, and of grain sorghums, including kafir, milo and feterita—drought resisting grain crops—found and introduced by Uncle Sam's plant hunters—now enables farmers in these semi-arid regions to grow about \$105,000,000 worth of these crops annually. Egyptian cotton, introduced by the same agencies, yields annually approximately 17,500,000 pounds of

(Continued on page 98)



This baby elephant was captured by Plant Hunter H. L. Shantz, during his 9000-mile expedition into Africa



The upper picture shows Dr. H. L. Shantz examining a wild cotton plant in Anglo-Egyptian Sudan, Africa

How Doctor Shantz and his expedition traveled through Central Congo. Note the dugout canoes carried by rail



## Here Are the Most Wonderful Gorilla "Portraits" Ever Taken!



Profile of an old male gorilla, showing the distinguishing high crest at back of head, the heavy, bulging brow, ridiculously small ears and the tremendously powerful jaw

THE amazing gorilla photographs reproduced here are not only the most remarkable pictures of their kind ever published, but are a valuable addition to scientific knowledge of the fierce "manlike" ape—the rarest and largest of all the ape tribe. They were obtained by T. W. Barnes, Fellow of the British Royal Geographic Society, during a recent expedition into the wild gorilla country west of Lake Kivu in the Belgian Congo, Central Africa.

Because little has been known of the actual life and habits of the gorilla, although of all anthropoid apes he and the chimpanzee represent the nearest approach to man in bodily form and intelligence, these photographs are of exceptional interest.


The center picture, showing an African native, five feet ten inches tall, standing beside one of the manlike monsters of the Lake Kivu country, gives an idea of the



Compared with this giant gorilla from Lake Kivu, Belgian Congo, the African native, standing five feet ten inches tall, looks puny. Note the animal's long, powerful arms, short legs and bare breast. He weighs more than 450 pounds

gorilla's enormous bulk and power. Standing nearly seven feet high, and with a chest girth of 61 inches, he weighs more than 450 pounds.

The photograph at the left—a profile of an old male gorilla—reveals a strange distinguishing mark of the species—the high crest at the back of the head, forming a great plate of bone for the attachment of muscles of the jaws, which are so powerful, it is said, that they can flatten a gun barrel.

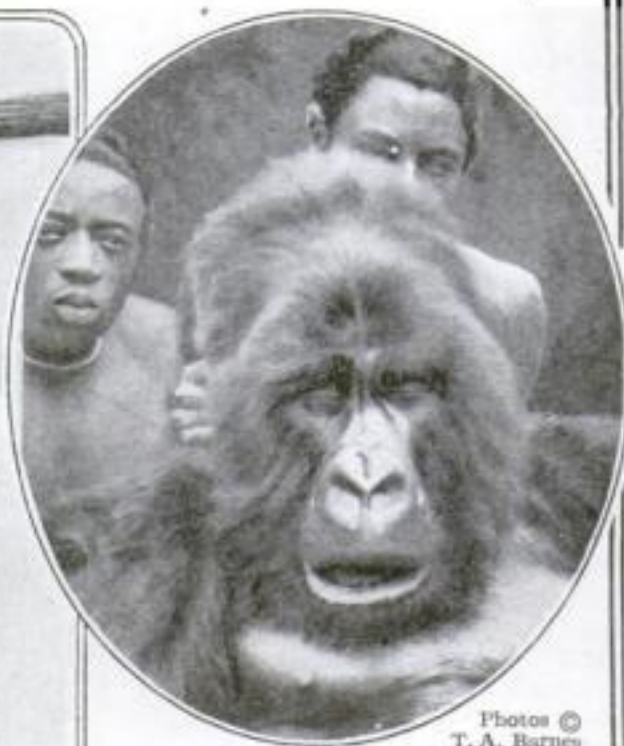

Photos © T. A. Barnes

Ferocious? Yes—but this shaggy head, twice the size of a man's, incloses a brain that for intellectual capacity is nearest approach to human

In the photograph at the right, note the wide, wrinkled nostrils, and especially the heavy bulging brow ridges that also are marked characteristics of the so-called prehistoric "ape man" skull recently unearthed in Rhodesia, South Africa, and believed by some scientists to be that of the long sought "missing link." The Rhodesian skull was fully described in the March issue of *POPULAR SCIENCE MONTHLY*. The gorilla's mental capacity has only recently been revealed. Dr. William T. Hornaday, director of the New York

Zoological Park and an authority on wild animal life, in a report of recent observations on a captive young male gorilla when subjected to human environment, points out that these huge, savage-looking, manlike creatures may be capable not only of learning and adopting some of the civilized habits of human beings, but also of meeting puzzling situations with evidence of original thought.

## Tunneled Stern Gives Super Speed to Twin Screw Racing Boat

BY AN ingenious arrangement of surface propellers inclosed within an air tunnel, George F. Couch, of New York City, has perfected what experts say is the first successful twin-screw racing boat in history—the *Rainbow II*, a marvel of speed that marks a valuable contribution to the science of speed boat design.

Heretofore the chief drawbacks to twin-screw displacement have been the added resistance of an extra submerged propeller shaft, and the difficulty of making sharp turns.

These difficulties Mr. Couch has overcome by the use of surface propellers—only the lower parts of which are immersed. The propellers are placed in an open well located at a distance from the stern equal to one third the length of the boat. This position insures that steering will not be hampered in turning sharp corners.

To supply the propeller tunnel with circulation of air, an opening in the deck



A speed marvel—the *Rainbow II*. Diagram shows position of surface propellers in air tunnel leading to the deck

leads to the propeller well. When the *Rainbow II* is in full speed, the air rushes down this well, through the propeller, and out under the stern.

Although the over-all length of the boat is 32½ feet, the "wetted surface," which is that part of the hull in contact with the



water at full speed, is only 12 feet. By means of two longitudinal breaks or stops running parallel to the keel, the beam of the boat is only 5½ feet at top speed.

With the two engines developing 550 horsepower, the *Rainbow II* has attained a speed of 54 miles an hour in practice runs.



# How America's Longest Tunnel Will Pierce Rockies

*Colorado's Six-Mile Bore through Continental Divide to Throw Vast Wealth Open to Nation*

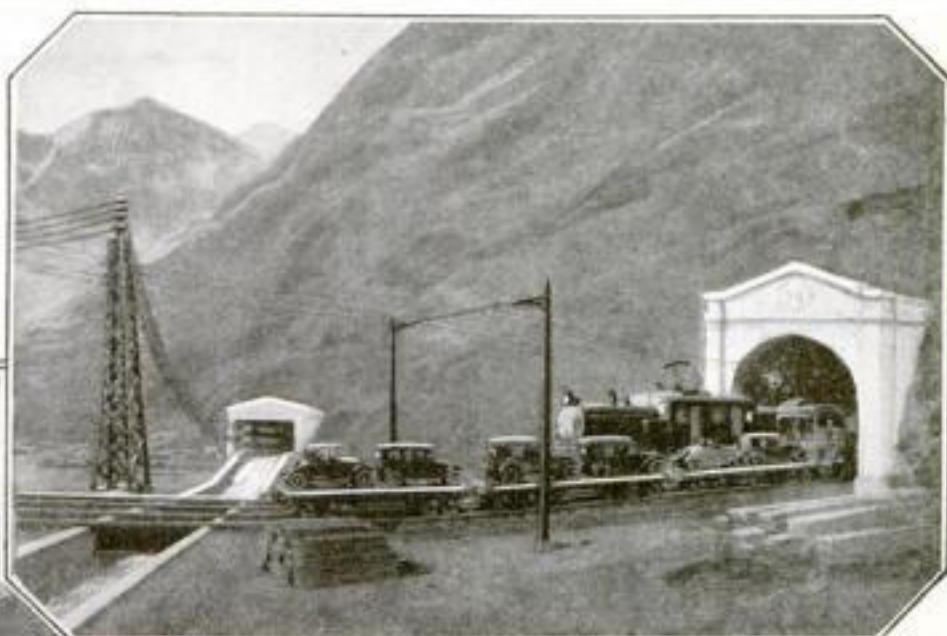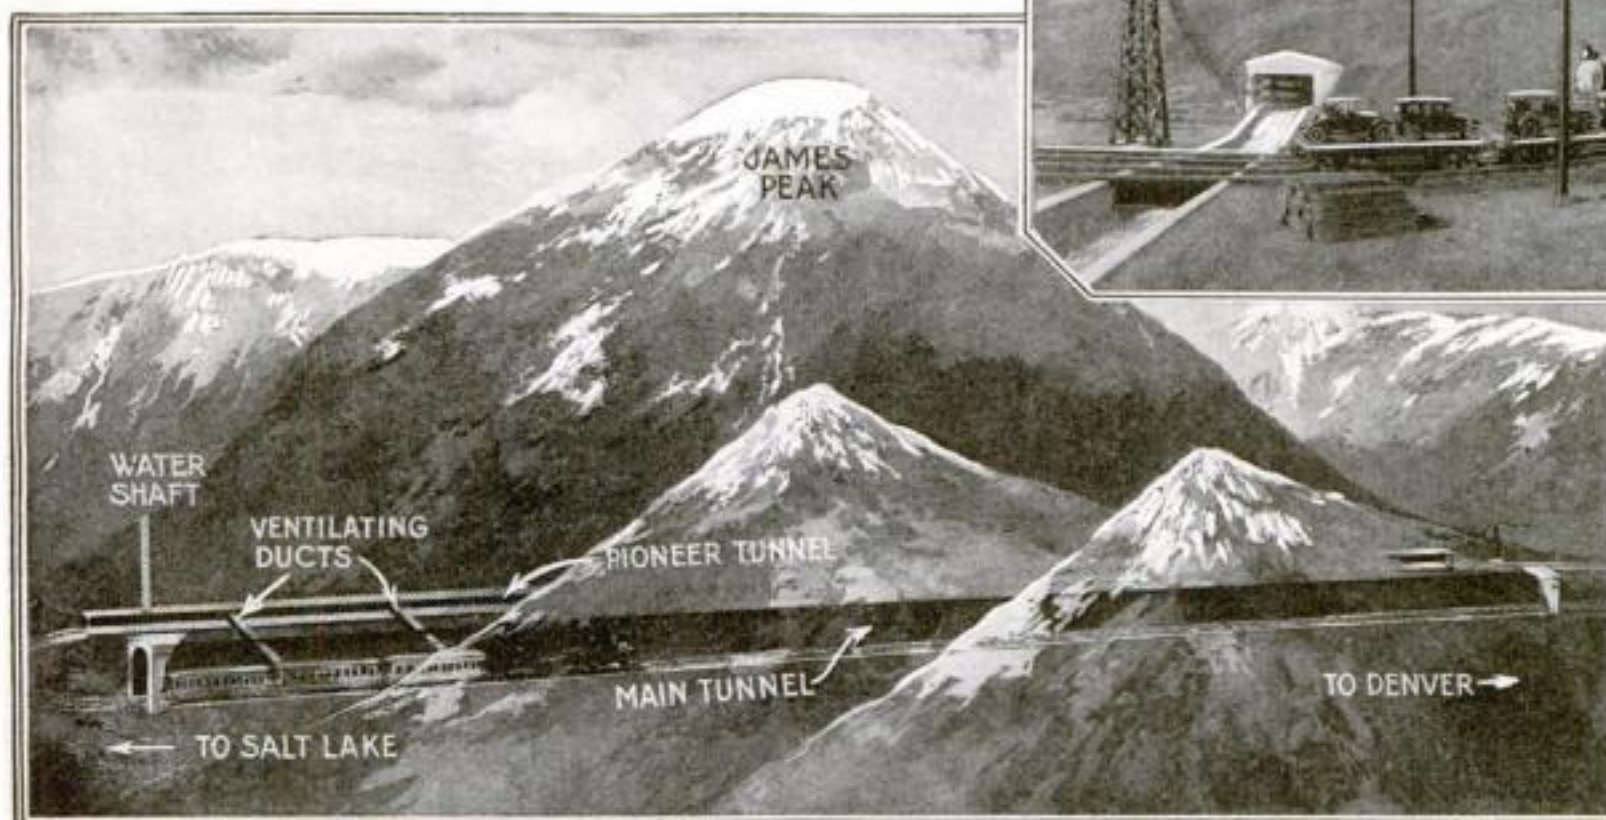

Transcontinental tourists in automobiles and motor trucks will be hauled through the tunnel on flat cars attached to the regular trains. The picture above shows the portals of the main, or traffic, tunnel and the secondary water tunnel, approximately as they will appear when completed.

**H**OW America's longest tunnel—the proposed six-mile bore through James Peak, Colo.—will pierce the Continental Divide. This diagram shows the main tunnel and one end of the small "pioneer" tunnel, to be used first in construction of the main bore, and then to carry to Denver a fresh water supply from the western slopes of the Divide. Since the eastern or Denver end of the tunnel is 90 feet

higher than the western, gravity pressure for this water must be obtained by means of an intake shaft on the western slope, with the intake at a point higher than the peak of the tunnel. Compressed air lines will also be carried through the pioneer tunnel, to ventilate the main tunnel through ducts connecting both bores at intervals. Electric service lines will pass through the same tunnel.

more than 65,000,000 tons—enough to keep the whole United States supplied for 100 years—will be made available to world markets.

**H**ALF a mile below the snowy summit of James Peak—a 13,283-foot Rocky Mountain barrier in northern Colorado—work will soon start on the longest and, from an engineering standpoint, the most remarkable tunnel in the Western Hemisphere—a six-mile bore through the granite backbone of the Continental Divide, at a point 50 miles west of Denver, Colo., on the line of the Denver & Salt Lake Railroad.

Comparable in magnitude only with the famous 12-mile Simplon tunnel through the Alps, the great mountain-piercing tube, when completed, promises not only an important time-saving advance in transcontinental transportation, but the opening to the world of vast treasures of ore, coal, and timber.

## Denver's "Place in the Sun"

Considered merely as a local enterprise, the James Peak tunnel will mark the final chapter in Denver's 60-year struggle for recognition as a transcontinental railroad center. It is expected to result quickly in a 30 per cent increase in the city's population as well as an enormous increase in its prosperity. But from a national standpoint completion of the tunnel—probably within the next 3½ years—will bring tremendous public advantages, of which the following, from the estimates of engineers and geologists, are the most outstanding:

Eight hours of railroad running

time, represented in a distance of 154 miles, between Denver and the Pacific coast, will be saved.

The present shortest traveling distance across the continent will be shortened 73 miles, and four hours will be saved in transcontinental trips.

Maximum grades will be reduced from eight to two per cent.

Rich coalfields, estimated to contain

There will also be opened more than 2500 square miles of oil shale with an oil producing capacity of 50,000,000,000 barrels, and, as a by-product, 300,000,000 tons of sulphate of ammonia—enough to fertilize every farm in the Mississippi Valley.

More than 10,000,000,000 feet of timber will be made available for use.


Other natural resources that, according to these estimates, will become available, include copper ores, gold, radium ore, gypsum, graphite, lead, manganese, mercury, marble, salt, silver, slate, sulphur, tungsten and zinc.

## Tunnel May Pay for Itself

Indeed, the cost of boring may have been met by unearthed treasures long before the first train passes the tunnel's portal.


The passage of that first train will be the climax of a dramatic battle to conquer a grim continental barrier, begun 54 years ago when David H. Moffat, "the grand old man of Denver," then 60 years old, threw his entire fortune and ability into the construction of the Denver & Rio Grande Railroad.

Faced by the unconquerable barrier of the Rockies, which are at their highest opposite Denver—the foothills being only 14 miles away—the city had seemed for many years to be hopelessly cut off from any direct route farther west, and was shunned by transcontinental railroads that selected other routes over the Rocky Moun-

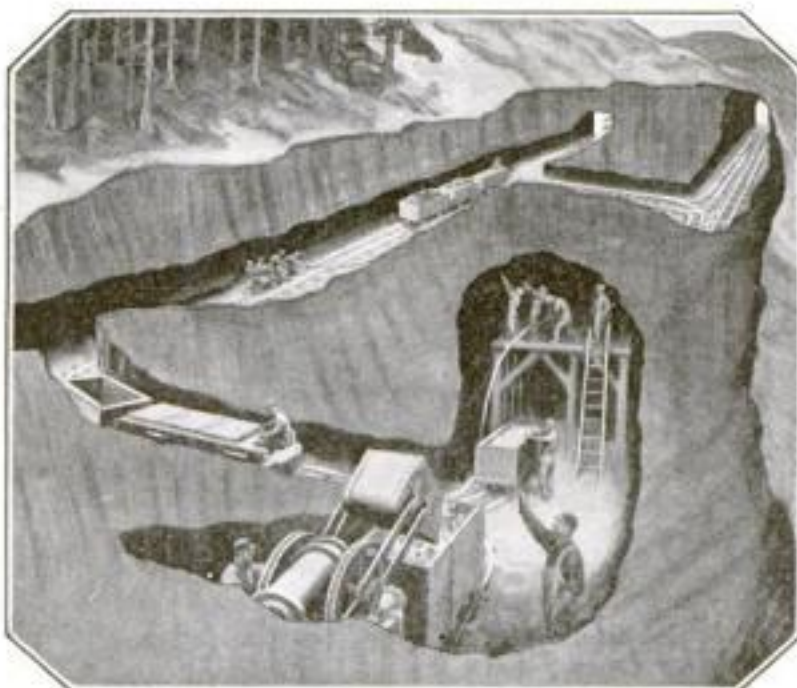

Instead of boring the Moffat tunnel only from each end, as is usually done, the engineers plan to construct first a small parallel "pioneer" tunnel, and, cutting through at various points from this to the line of the main tunnel, to dig the latter in both directions from these points, so that perhaps half a dozen sections of the six-mile underground tube may be under construction at once.



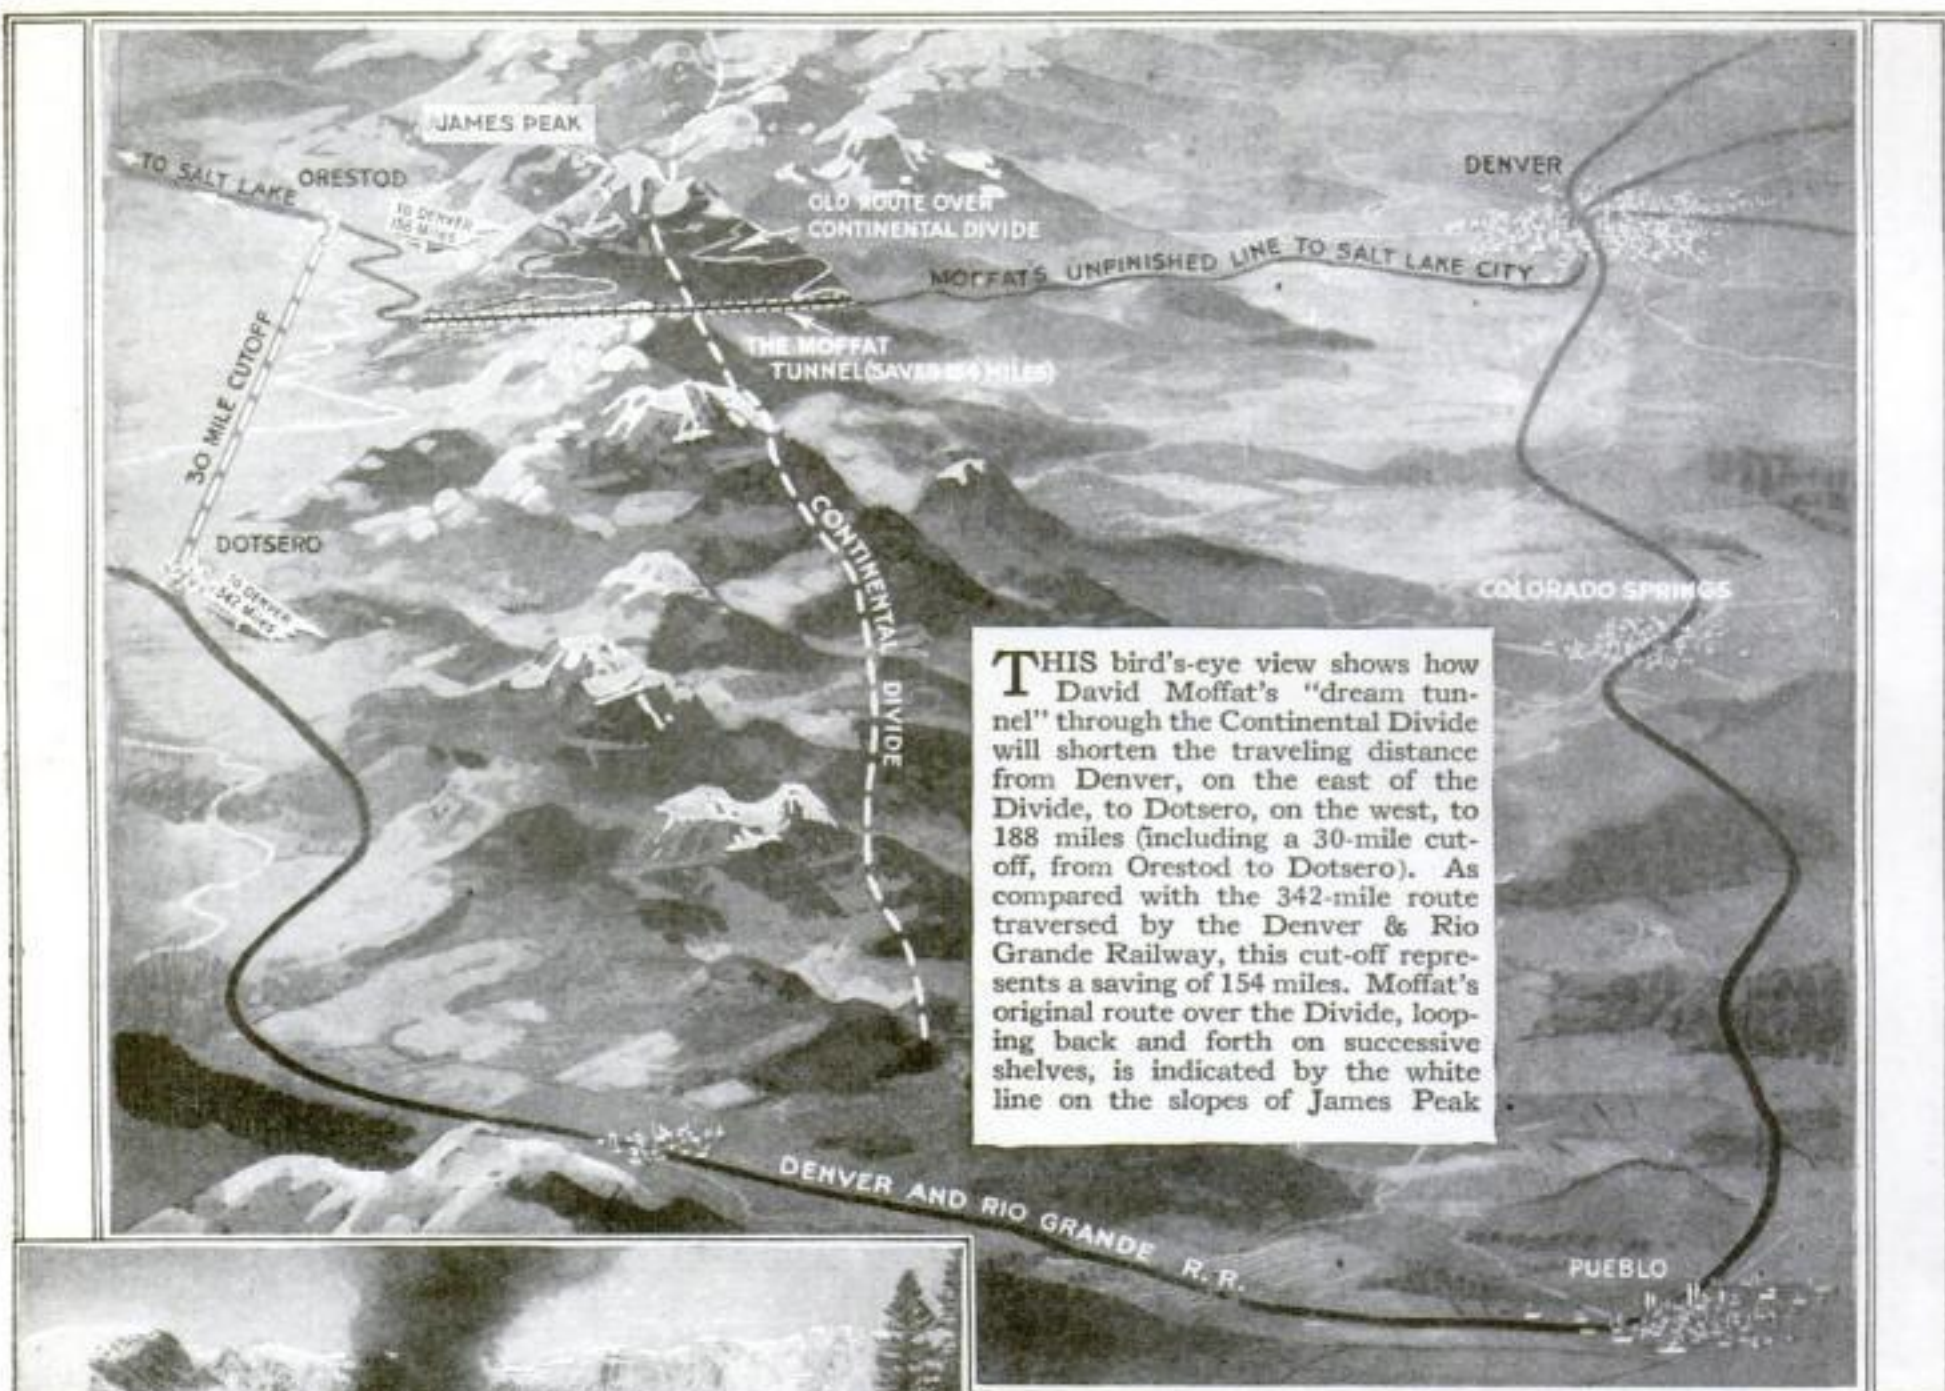

THIS bird's-eye view shows how David Moffat's "dream tunnel" through the Continental Divide will shorten the traveling distance from Denver, on the east of the Divide, to Dotsero, on the west, to 188 miles (including a 30-mile cut-off, from Orestod to Dotsero). As compared with the 342-mile route traversed by the Denver & Rio Grande Railway, this cut-off represents a saving of 154 miles. Moffat's original route over the Divide, looping back and forth on successive shelves, is indicated by the white line on the slopes of James Peak.



David H. Moffat (at right), who gave his fortune and life to building the railroad which, for lack of the tunnel he dreamed of but could not finance, had to climb, as shown above, almost impossible grades over snow-choked passes



tains. It was in 1868, that energetic citizens pledged their money to build the Denver & Rio Grande. This railroad gave Denver its first transcontinental connection, but the circuitous route which it followed proved to be a serious drawback. Dipping southward from Denver, the railroad that was supposed to connect the Colorado capital with the Pacific Coast meandered 160 miles without advancing an inch toward its ocean terminus, while it sought an opening in the Rockies through the Grand Canyon of the Arkansas and the Royal Gorge. The Santa Fé road also had its eyes on this route and the race to the gorge became a stirring contest of engineering skill. The Rio Grande won, and for years was the only railway line to the West from Denver.

The above bird's-eye view of the Continental Divide country in Colorado reveals

how roundabout was the route. Irritated by this waste in time and trackage, Moffat seized a ruler, one day in 1903, and placing it across a map of Colorado, east and west, exclaimed:

"I am going to build a railroad along the line of that ruler, west from Denver to Salt Lake!"

Work started immediately on the "Moffat Line" out of Denver to Salt Lake City, straight as the

crow flies, over the Great Divide. Obstacles were met and conquered, but Moffat's millions dwindled. Determined to raise the money for the completion of his railroad, Moffat went to New York where, burdened with financial worries, he died in 1911.

He lived long enough to see the road completed as far as Steamboat Springs, about 100 miles northwest of Denver. Only one thing had made him deviate from his original straight line project. That one obstacle was James Peak.

The original Moffat road reached the slope of the peak at an elevation of 9190 feet. From there on, in a distance of 24 miles, the track rose to an elevation of 11,700 feet! Trains made their way slowly over this tremendous grade, and then only by looping back and forth on successive shelves. Twitted about this defect in the

completion of his road, Moffat answered in his characteristic manner: "I intend to go through that mountain!"

After his death, work on the Moffat tunnel was considered frequently, but no real progress was made until early this year, when the Colorado legislature set aside \$7,000,000 for completion of the project.

### Route Shortened by 154 Miles


When the six-mile tunnel is completed, the line from Denver to Orestod, on the western slope of the Divide, will cover a distance of 158 miles. With a 30-mile cut-off from Orestod to Dotsero, the total distance by rail from Denver to Dotsero will be 188 miles, as compared with 342 miles over the circuitous Denver & Rio Grande.

The plan of construction calls for two bores—a small preliminary or "pioneer" bore, eight by 10 feet, to be driven first, and the main tunnel, to be 16 feet wide with a clearance of 24 feet. Rock from the main tunnel will be removed through galleys connecting with the pioneer bore.

Work will be started at both portals of each tunnel simultaneously. When the main tunnel is completed, electric locomotives, supplied with power from specially built generating stations, will haul not only trains, but motoring parties in their automobiles and motor trucks, on flat cars, through the great tube.

Eventually the small pioneer tunnel, designed primarily to aid in constructing the main tunnel, will be used for power transmission lines, telephone, telegraph, and light wires; while carrying also compressed air lines to ventilate the traffic tube through transverse ducts connecting the two tunnels.



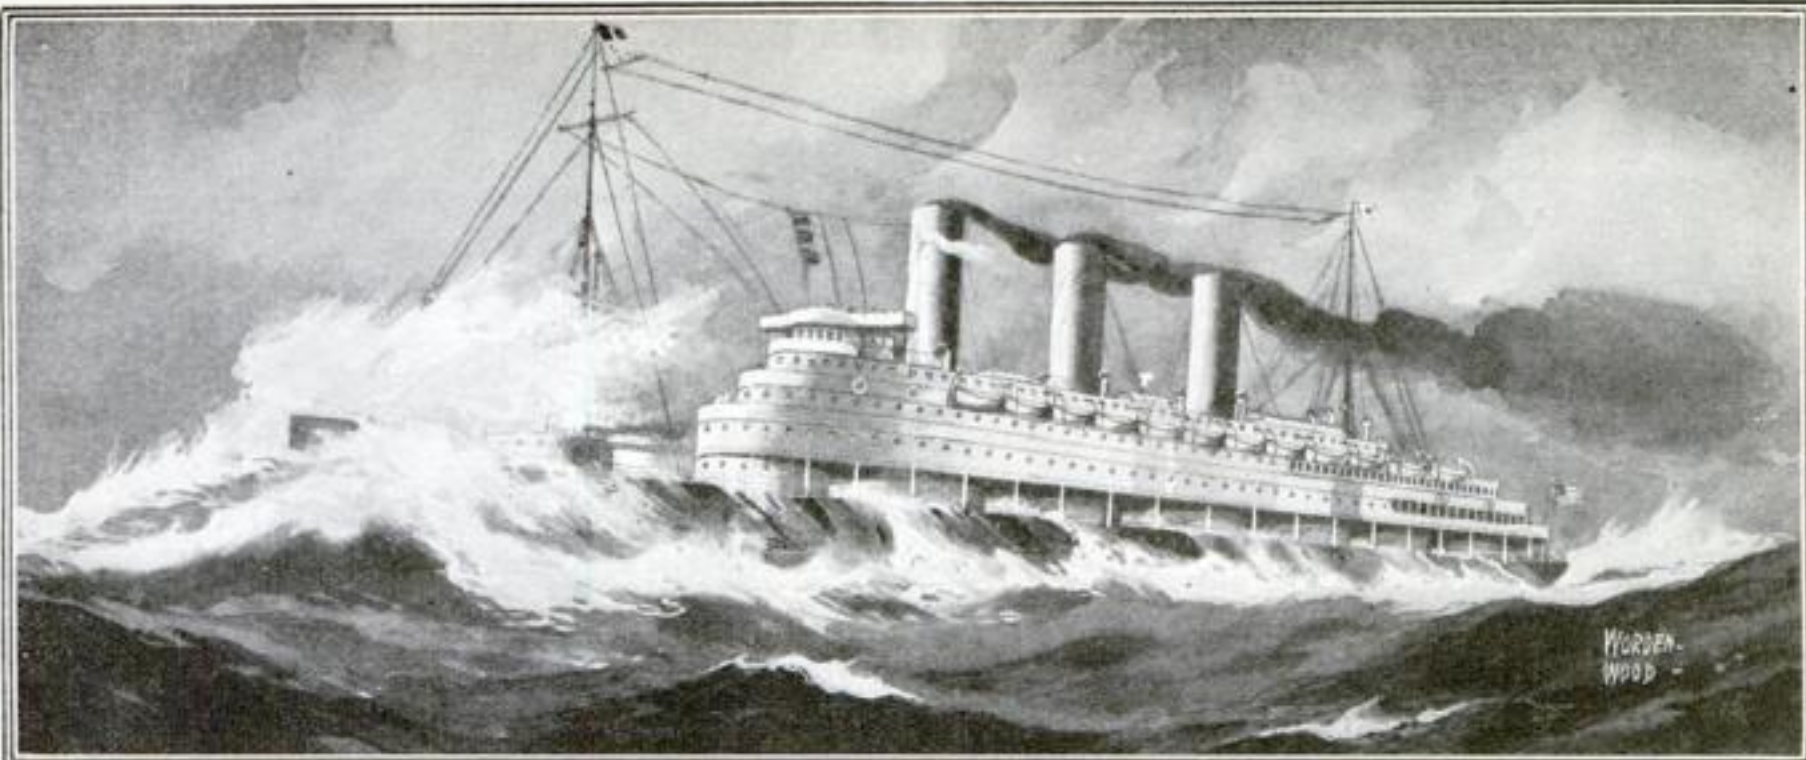

© Popular Science Publishing Co., Inc.

How the proposed McDougall rectangular ocean liner would plow through heavy seas. With passenger cabins supported

on turrets high above the decks, the unusual vessel would be stabilized, the designer claims, by waves sweeping the deck

## Sees Speed and Comfort in Flat Bottomed Liners

### *Veteran Designer of "Rectangular" Lake Freighters Predicts Economy for Similar Self-Stabilizing Ocean Vessels*

**T**HIRTY years of success in riding heavy seas on inland lakes and along coastwise cargo routes have so demonstrated the seaworthiness of the flat-bottomed, straight sided ships designed by Captain Alexander McDougall, of Duluth, Minn., that the veteran mariner now proposes the use of his long famous "rectangular" vessels in transoceanic service to replace the gracefully curved ocean liners with their higher construction cost and smaller cargo capacity.

The feature that has spelled success for the McDougall rectangular ships in years of service is the flat deck placed low on the ship's frame with the deliberate purpose of permitting the crests of waves to wash aboard. When a McDougall ship noses into a comber, it picks up water and holds it for an appreciable time. This prevents the ship from rising at once and so reduces the pitching.

Below, photograph of one of McDougall's rectangular freighters, on the Great Lakes, shipping a sea. Note the flat deck

Because the outlines of the bottom and deck are practically identical in design, the construction of the ship is greatly simplified. After the shape has been marked out,

frames are of equal length. After they are riveted in place, deck frames corresponding exactly with the hull frames are attached to the uprights and the vessel is ready for the plates.


Rectangular ships cost less to build and to maintain because their straight sides allow the builder to use standard steel beams. The absence of curved bilges makes forming machinery unnecessary. Compared with an ordinary ship of equal size, the rectangular ship will have a greater cargo capacity, and

will draw less water when fully loaded. When the idea is applied to passenger ships, the same flat-decked hull is used.

The cabins are supported on turrets resting on the flat deck. Waves taken aboard sweep along the flat deck and under the state-rooms, but not over them.


Forty-five of the rectangular ships have already been built, most of them plying the Great Lakes.

A Great Lakes rectangular, flat-bottomed ship (below), adapted for use on canals, provides unusual deck cargo space


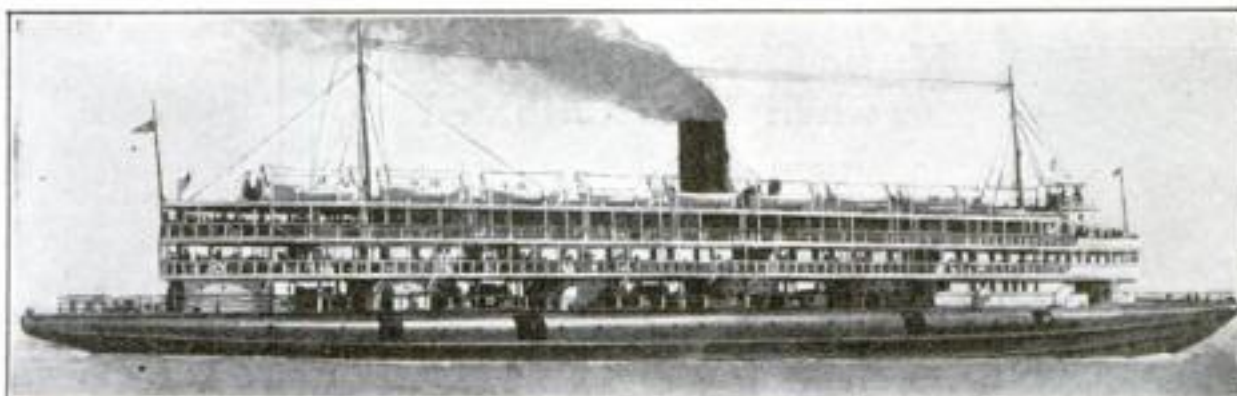


The "whaleback" Christopher Columbus, famous on Lake Michigan, was built by Captain McDougall with the flat deck and turrets he now proposes for ocean liner

the hull frames are laid in place from stem to stern and the upright frames riveted to them. Because of the flush deck, all side

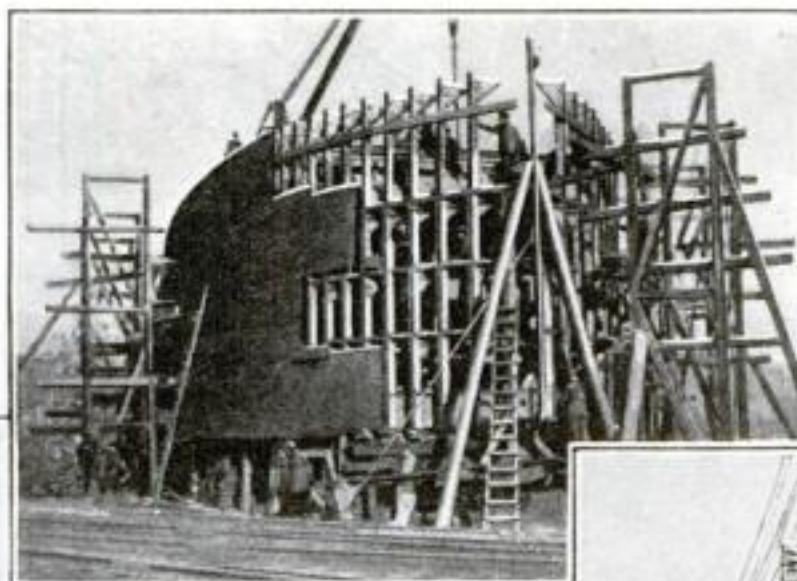


Simplicity of design is evident in the above photograph showing a McDougall flat bottomed ship under construction

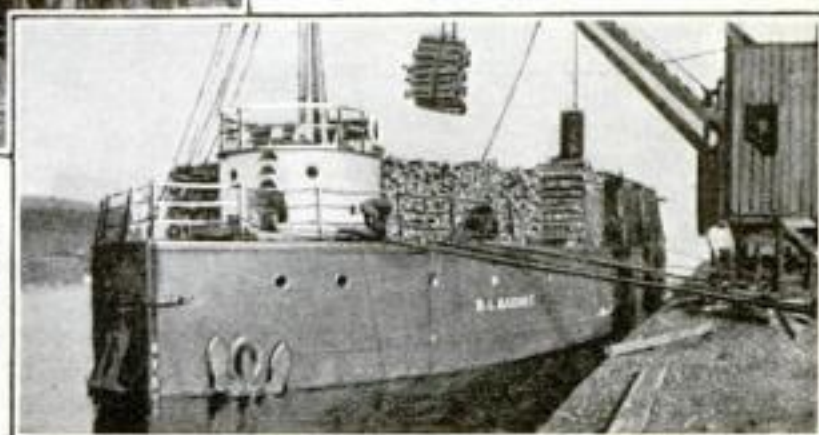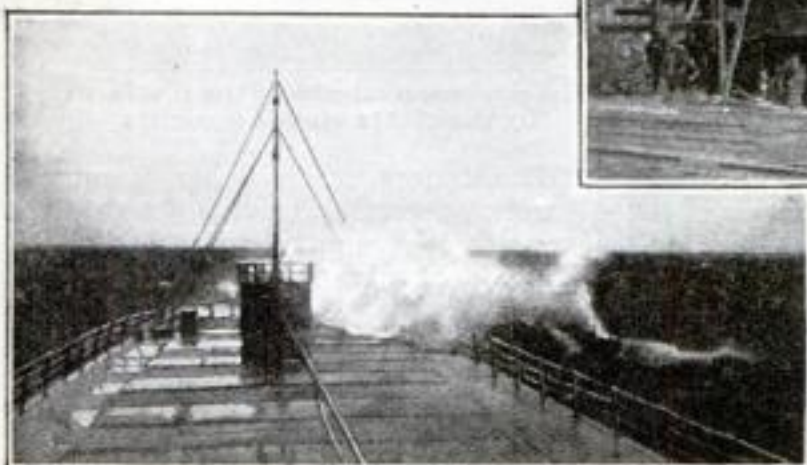



## "Battlebag" Is New Sport for Small Yards

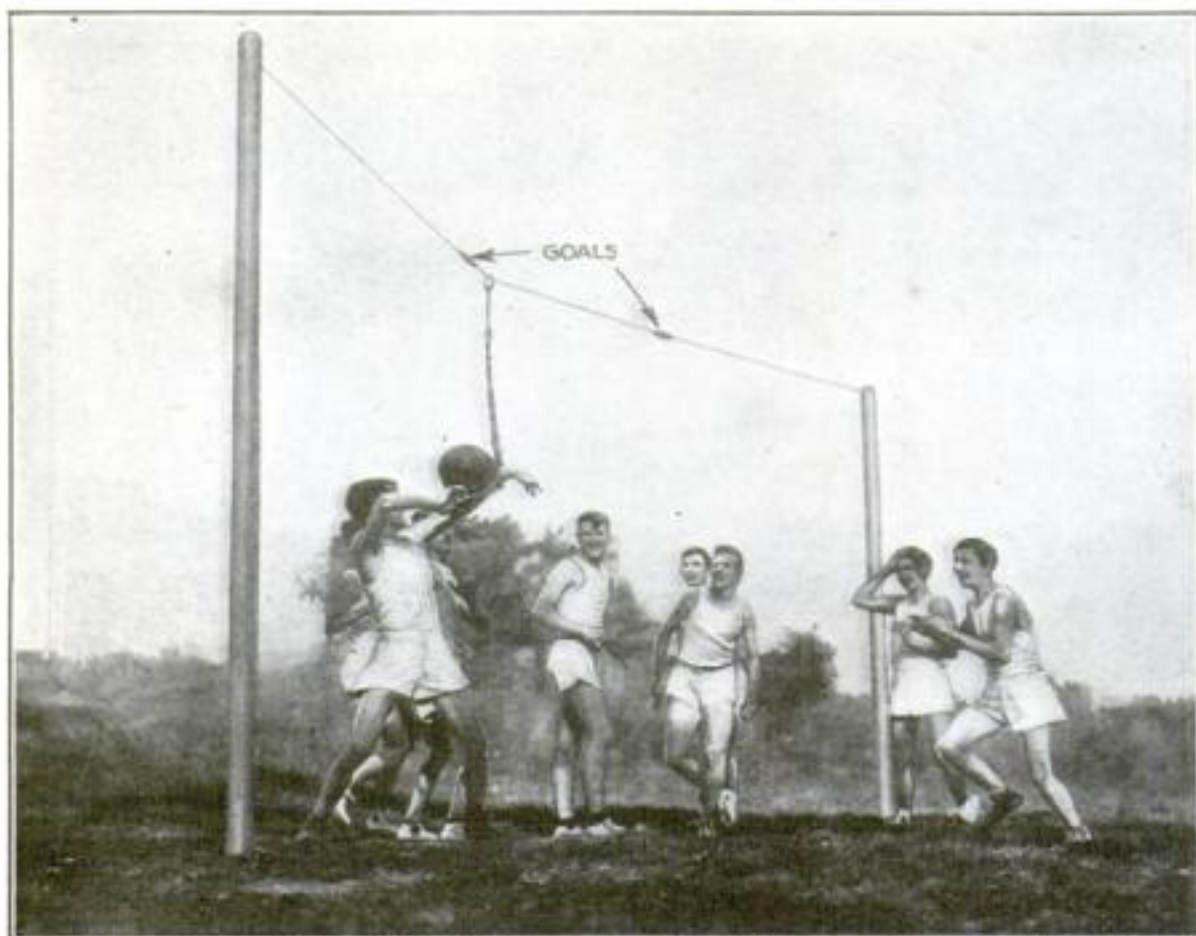


The new game of battlebag can be played in a small space either indoors or out by any number of players

**"BATTLEBAG"** is a new game devised for either indoor or outdoor sport. The apparatus consists of a horizontal wire stretched between posts, from which a punching bag is suspended by a loop. Knots are placed four feet away from each post to serve as goals.

In playing the game, the bag is sus-

pended from the exact center of the wire with two players directly under it and the teams lined up at each end. At a given signal the two players strike it sharply and the other players advance to the scene. It is then a struggle to see which team first succeeds in sliding the ball by blows across the opposite knot.

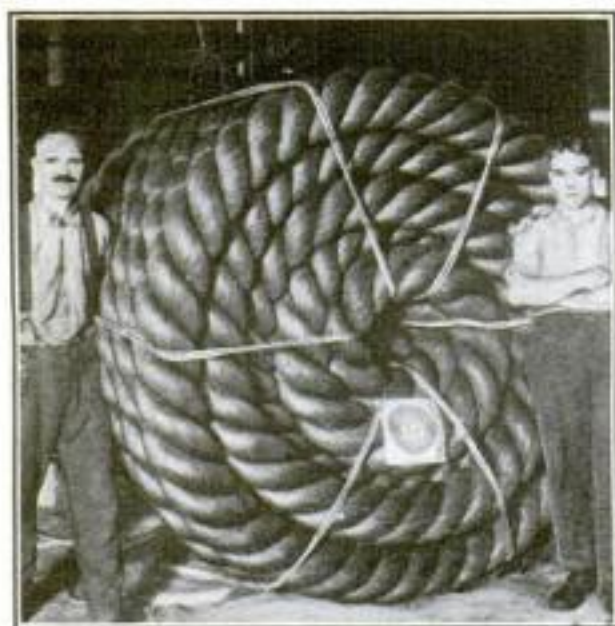

This coir hawser is said to be the largest ever made

## Largest Tow-Rope Is Spun from Coconut Fibers

**A** COIR hawser 24 inches in circumference, produced recently as a towline for a powerful seagoing tug, is believed to be the largest rope ever spun. It is by no means the strongest ever made, however, since coir—spun fibers of the coconut—is only about one quarter as strong, pound for pound, as rope of manila fibers, which are obtained from the leaves of the wild banana tree.

Coir is used to advantage because of its astonishingly light weight. It will float on the surface of the water, and therefore is much easier to handle in passing lines from one boat to another.

Many hawsers of this weight are needed to withstand the drag of even a medium size liner.

## Music Case Becomes a Stand when It Is Unfolded


**A** MUSIC case that may be adjusted for use as a music stand has been invented by Edward L. O'Donnell, of St. Louis, Mo.

When closed, the device resembles a suitcase; but when opened for use, four metal legs drop down and support the



case, one side of which, opening outward, reveals two compartments for the sheets of music.

Within the top compartment are lazy tongs that are extended to provide a support for the music rack. When the music support is depressed, it forms a side wall of the case, which, when folded, is neat enough to be carried anywhere.

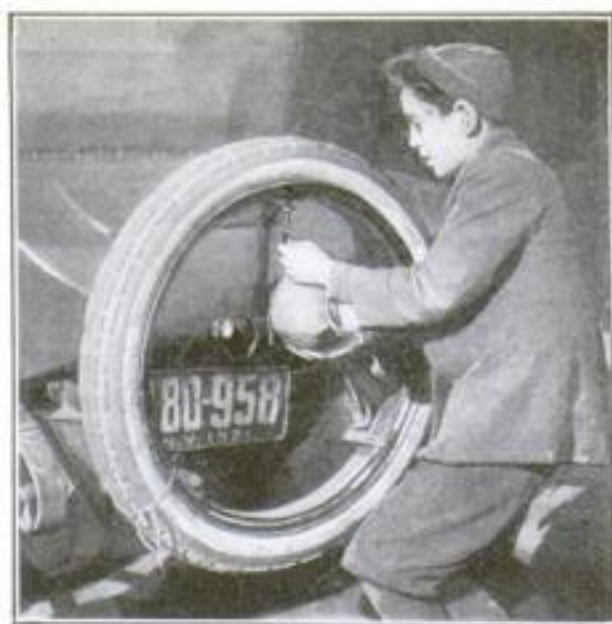


## Boys Rob Tires of Air to Inflate Footballs

**BOYS** in New York have discovered that the easiest way to blow up a football is to "borrow" a little air from an auto tire—usually the spare at the rear of some unoccupied car.

By slipping the rubber tube of the bladder over the top of the valve, the football is inflated instantly, and without undue expenditure of effort.

However, the boys sometimes discover too late that the tire pressure is more than the ball can withstand and an explosion is the reward for their ingenuity.

## Ceilings Reached with Telescoping Elevator

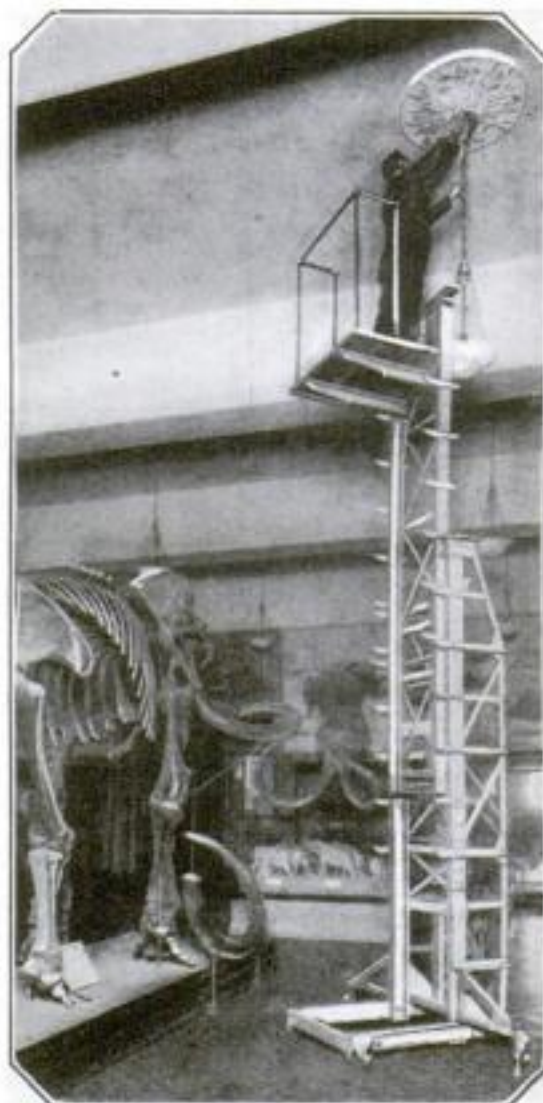

The workman climbs to the platform by the cleats on the uprights

**F**OR interiors where laborers must work at varying heights above the floor a new telescoping elevator has been perfected. It is manipulated by a hand crank at the base. The workman can also use the ladders at the side. For stability, two outriggers with friction cups are swung from the base.



## New Detachable Reel Holds Hose without Kinking



ANY part of the hose or all of it may be unwound from a recently invented detachable hose-reel without becoming looped and kinked and again wound on the reel when no longer needed. The reel is attached to the faucet, around which it revolves freely.

The hose is fitted by a screw joint into a hollow spoke of the reel. This spoke communicates with the axle, which is also hollow and fits into a special faucet that is permanently placed at the end of the service pipe.

Hose and reel never become separated and after the hose is wound on the reel, the latter, together with the hose wound on it, may be put out of the way.

## Perforated Cards Despatch City Fire Fighters



The perforated card and automatic despatching machine at "Central"



THIRTY-THREE seconds after an alarm is turned in, the fire fighting apparatus of New York City is on its way to the fire. In that short time with the aid of perforated cards the alarm is verified, recorded at the central office, and relayed to

## Siren Played by Sliding Drive Belt

THE strident notes of the siren have been musically tamed by a unique invention of Dr. A. R. Naber, of Holland, named by him "the magic flute."

In the ordinary siren the pitch of the musical notes is determined by the frequency of the impulses of compressed air passing through the openings in a rotating disk. But in the improved instrument the speed of this disk is arranged to be varied at will by an ingenious driving spindle, producing in the hands of an experienced artist all the tones and semitones of the flute.

The magic

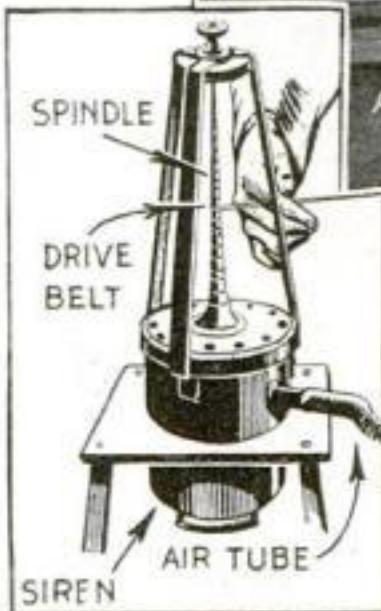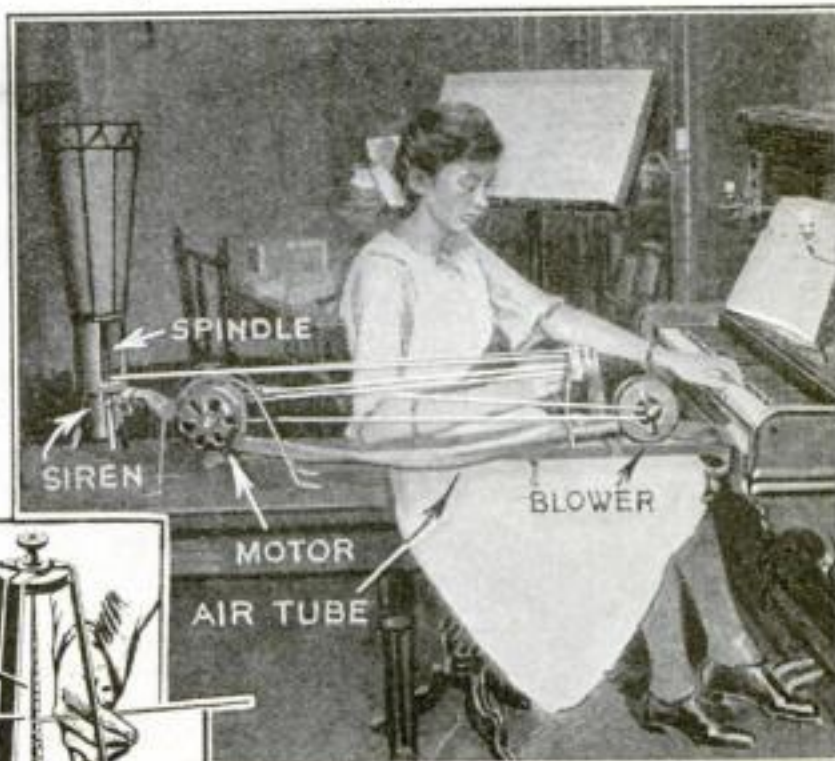

A full range of tones is obtained by sliding the string belt up and down the tapering shaft. The instrument is being tuned

flute outfit consists of a small electric motor that drives the spindle of the siren disk by a flexible cord. While operating the magic flute, the cord connecting the spindle and motor is held between the fingers and altered in position as the score demands.

the engine house nearest the fire. The perforated card is the basis of the new system.

When the handle of the alarm box is turned, the box number is recorded visibly and audibly on a target in the central station. From an index box, the operator takes out a perforated metal card corresponding to the number of the box, places it under the despatching frame, which consists of a complicated arrangement of metal plungers and control switches, and throws down an electrically connected lid. As the plungers pass through the holes in the card, they signal all stations in that zone to be prepared for the second alarm.


## Photographer Snaps Car in Mid-Crash

FAST work with a camera enabled a photographer to snap the remarkable action picture shown below before the capsized car had ceased rolling. The camera had previously been focused on the turn in the road and the photographer, with unusual presence of mind, followed the skidding car with his lens and snapped the picture.



The pilot was still rolling when the photographer tripped the shutter

## Every Step Adds a Mile to the View

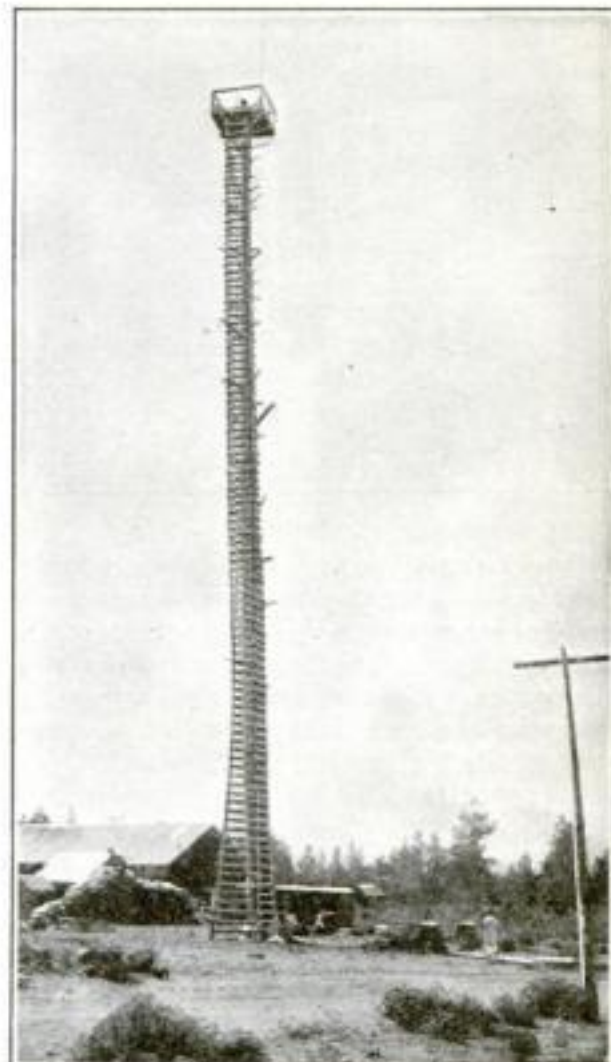

A fir tree forms the support for this 100-foot fire tower

AN ADDED mile of sight for every step is claimed for "the Sisters' Lookout," a forest fire station in the Deschutes National Forest, Ore. A frame of rough timber nailed to a fir tree forms a 105-foot ladder to the observation platform.



## Speed Increased with Dummy Typewriter

A NEW type-writing machine, invented by Walter A. Butler and A. V. Cooper, of Troy, N. Y., is said to increase students' speed.

The arrangement of the keyboard is



By noting the relative positions of the lettered white disks, typewriting students visualize the words as a whole




standard, but the keys are blank. Back of the keys are four tiers of letters. Above each symbol is a white disk con-

nected with the dummy keyboard. As a key is depressed, the disk appears.

Thus, in making the word "the," the student receives the impression of three disks composing an acute triangle with the base uppermost. The student's brain retains the "shape" of the word.


## Powerful Electromagnets Now Assay Iron Ore

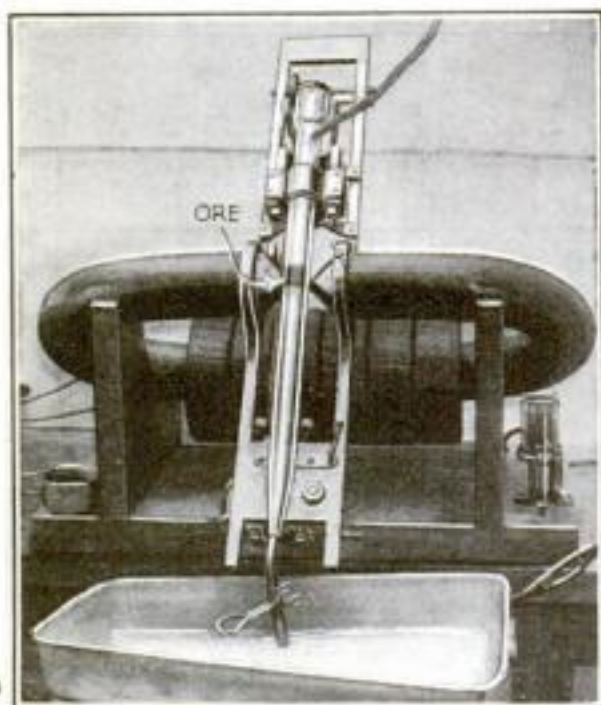

POWERFUL electromagnets are now used to analyze iron ore when it is desired to find out the percentage of magnetic iron in concentrate. This is usually the case with the magnetic iron ore deposits in Minnesota. The novel electrical apparatus now employed was originally designed and built at the University of Minnesota.

In operation, 10 grams of pulverized sample ore are placed in a glass tube, through which water flows under slight pressure. The tube is placed between the poles of an electromagnet. The current is turned on, and a powerful magnetic field is thrown across the center of the tube from the pointed extremities of the magnet. At the same time the glass tube is rocked slowly by a small electric motor.

The tube pivots on the pole pieces, with the result that all the magnetic ore is held in the center of the tube by the magnet, while the balance collects in the ends. When the washing and concentrating process is complete, it is easy to weigh and compute the percentage of magnetic iron ore in the sample.

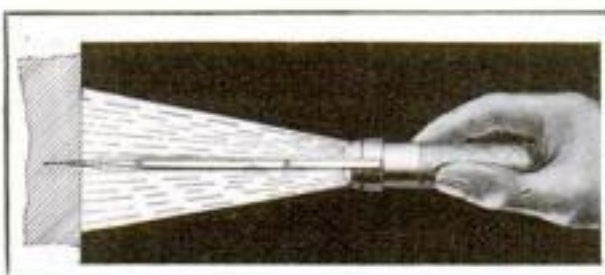

## Flashlight Illuminates Shadowed Work


HAND tools that supply their own illumination to facilitate the work being done have been brought out by a Mid-Western firm.

The complete toolkit is made up of the handle containing the battery and light source, three wrenches, and one screw-driver. The tools are of drop forged steel.

## Air-Hammer Breaks Ton of Pig Iron a Minute

A PNEUMATIC hammer is used for breaking up pig iron in an Alabama blast furnace. When molten iron from blast furnaces is allowed to cool in the pig or cast condition, the various pigs have to be broken up into single sections.

The equipment consists of an air hammer with a piston and striker of unusual size, and with valves and ports so arranged that a blow may be struck of sufficient force to break a pig into halves and sever it from the sow at the one stroke.

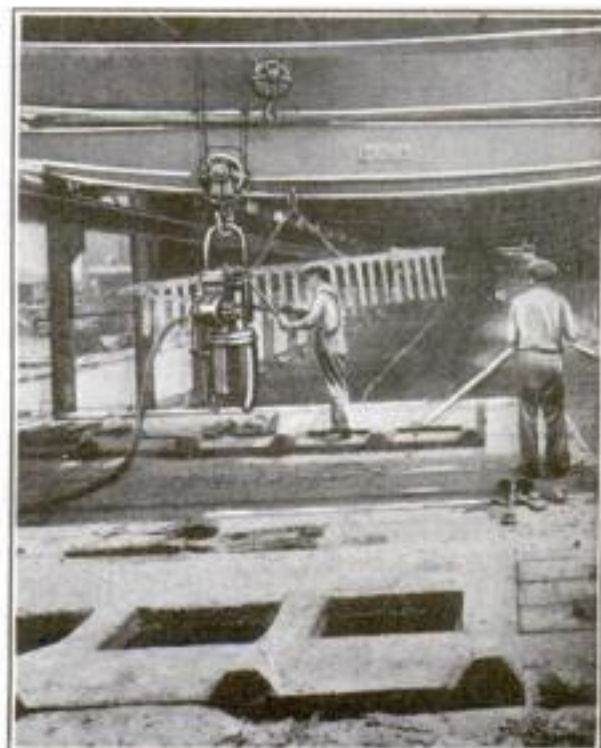

An air hammer working at 15 strokes a minute breaks up a ton of pig iron in the same time

It is used also for breaking up the sows. The cylinder is eight inches in diameter and the stroke 14 inches.

The hammer is suspended flexibly from an electric traveling crane. The bed of pigs is placed on a heavy cast-iron frame, which in turn is mounted on a platform above open-top railroad cars. When the pigs are broken, they fall through the openings in the frame directly into the cars. The hammer is operated by a hand-lever valve at a speed of about 15 strokes a minute.

## Auto Carries Record Load for Yeggmen

FINDING conditions in an office building of Los Angeles, Calif., unfavorable to safecracking, some robbers walked the streets until they found an automobile. Then driving it to the office building they parked it in front and proceeded to run the safe of an insurance company

from the eleventh floor to the elevator and then down to the ground. The 1100-pound safe was hoisted into the tonneau of the light passenger car and carted several miles before the rear springs finally gave way. Out in the open coun-




Although subjected to a terrific strain, this automobile carried the robbers and a half-ton safe many miles

try the robbers looted the safe of its treasure, and made a baffling getaway.

It is surprising that springs designed to withstand only a few hundred pounds should have held up for miles under such a weight.



## Pile Driver Hustles Pipe into the Ground

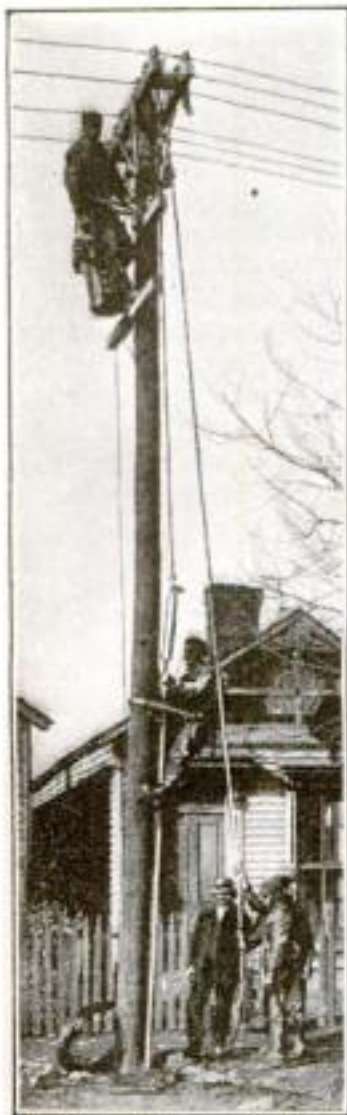

The dropping weight drives in the pipe

IN LOUISVILLE, Ky., the electric power and light company uses a portable pile driver for driving short lengths of pipe. It is said the device cuts the working time from two hours to 10 or 15 minutes.

Before this pile driver was perfected, ground pipes were driven by a sledge in the hands of a man, supported by climbers on the pole.

The portable driver consists of an old piece of line shaft, about three inches in diameter and 18 inches in length, attached to a guide rod eight inches long, which enters a one-inch pipe without rubbing.

At the other end an eyebolt takes a rope that runs through a sheave. When the weight is released, the impact drives the pipe from six to 12 inches into the ground.

## Extracted Nails Are Almost "As Good as New"

BY EQUIPPING a hammer with an adjustable fulcrum that may be extended to any length within the limits ordinarily required in carpentry, J. A. Bartosz, of Salem, Ore., has invented a device that permits a workman to withdraw nails of any size without bending them.

The extension fulcrum consists of a rod with its lower end enlarged to provide a support. The position of the fulcrum can be readily changed.




By adjusting the fulcrum on the hammer, nails are removed without bending



## Trap Nests Betray Loafer Hens

TRAP nests that work without springs have been perfected by three brothers of Sunnyvale, Calif., to separate laying hens from the loafers.

The nest consists of a box with an upper and a lower compartment and four doors. The hen desiring to lay enters from the back yard through one door into the upper compartment. As

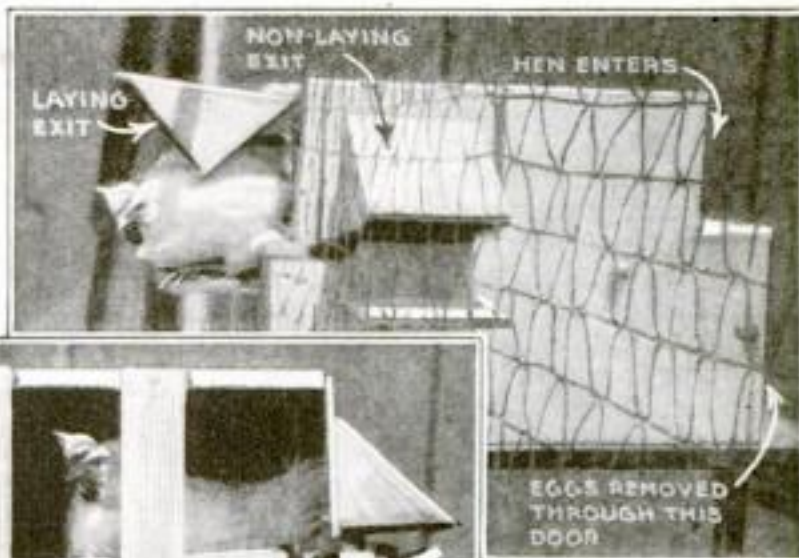


Each egg, as it is laid, operates a trap that automatically separates the laying hen from the loafer

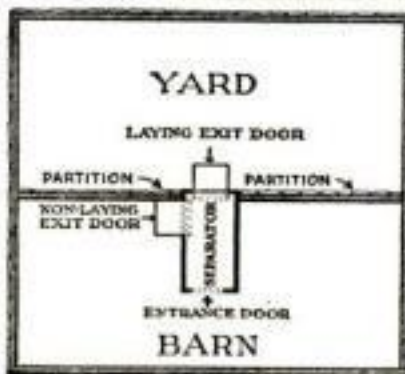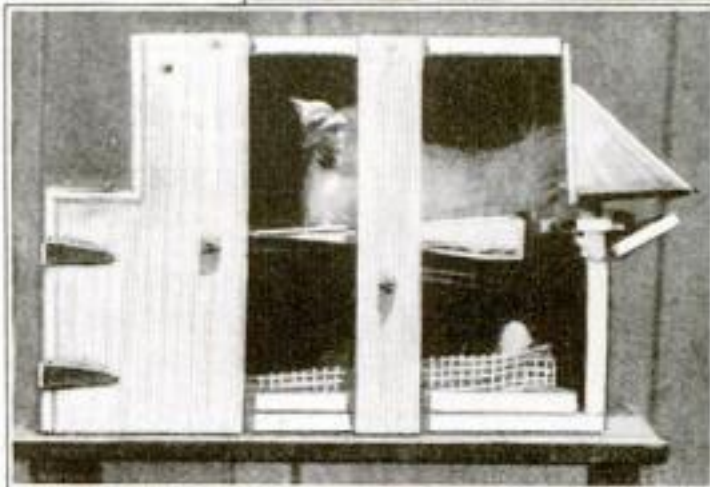

The trap nest is set each morning. At night, hens that have laid eggs are in one yard, while non-layers are in another

she squats on the nest, the door behind her is closed. If she lays an egg, the egg rolls down an incline into the lower compartment, where it operates a catch that opens a door in the front of the upper compartment. Through this door she steps down into a special yard. If she does not lay, she must leave through a side door. So the laying hens are in the special yard, while the non-layers remain in the back yard.

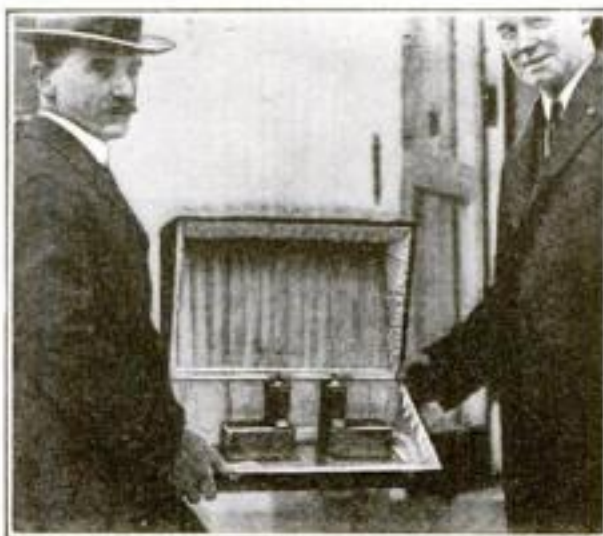

© K. & H.

## Inkstand Is Replica of Historic Gates

AN INKSTAND that is a miniature replica of the historic city gates of St. Augustine, Fla., is one of the latest gifts presented to President Harding. The original gates were built by the military governors during the Spanish occupation in the eighteenth century, and St. Augustine is proud of them, since they afford one more proof that she is the oldest city in the United States.


The inkstand is of silver, finished to imitate the age darkened adobe, or clay, of the gates themselves. This effect was obtained by a multitude of fine lines and a dark oxidized finish.

For the purpose of locating unknown lakes that may be the source of valuable water power, the Forest Service will soon take aerial photographs of all the national forest areas of Alaska.

## Artery Trouble Detected at Base of Fingernails

HARDENING of the arteries can now be detected in its early stages by examining the skin at the base of the fingernail under a high-power microscope. Doctor Lombard, of the Mayo Clinic, Rochester, Minn., a prominent physiologist, recently discovered that when a drop of cedarwood oil is placed upon the skin and a small but intense electric light held just above it, the minute capillaries that form the smallest subdivision of the blood vessels, become visible under the stereoscopic type of microscope.

At the base of the fingernail the capillaries run parallel to the surface of the skin, and their course can be traced by means of the blood streams flowing through them.

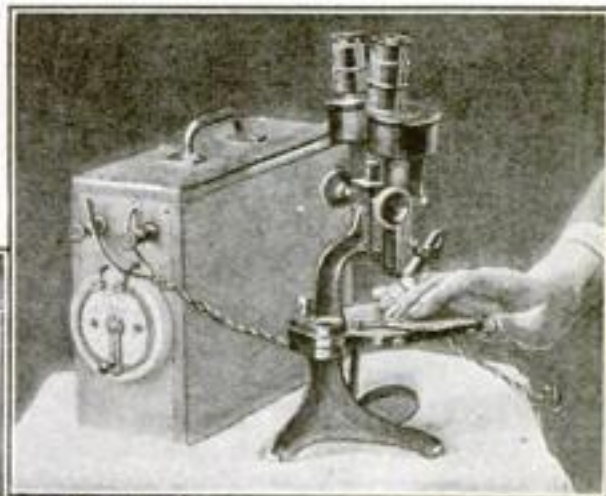

Microscopic examination of the skin at the base of the nail after treatment with oil of cedar reveals by the condition of the capillaries whether the patient is afflicted with arteriosclerosis, an ailment said to affect most persons over forty



## Enormous Steam Heated Spout Speeds Asphalt Handling

**B**LACK paraffin or asphalt, composing about 80 per cent of the crude oil from which it is obtained during the fractional distillation of certain black oils of California, finds a ready market in the manufacture of varnishes and paints and in the preparation of roofing and road surfacing compounds, but the low price obtained for it calls for every bit of ingenuity on the part of the distillery to cut the cost of handling and shipping to a minimum.

When cold, asphalt is hard and brittle like glass; at moderate temperatures it becomes plastic; and above 160° F. it is more or less liquid and can be run through pipes. For transportation it is run into barrels or thin metal drums designed so that the container can be stripped off without difficulty, leaving the asphalt in a solid mass of the same shape as its container.

In one California distillery the asphalt is readily handled by a central supply system with a discharge pipe or spout that swivels to any

One workman guiding the nose of the swiveling filling pipe fed from the storage tank shown at the right can fill hundreds of steel drums over the wide expanse of the filling platform



part of the filling platform. The hot liquid asphalt is pumped into a tank on the roof of the filling station and is kept in liquid condition by steam heating coils. From the bottom of the tank the asphalt flows through a steam-jacketed pipe of large diameter to the filling department below.

### The Swivel Pipe

The filling pipe has two sections connected by swivel joints with a similar swivel joint connecting with the outlet of the storage tank. Lattice braces permit the sections to be moved in an extensive horizontal plane.

With the aid of this swiveled pipe one workman can fill 800 barrels or steel drums in an eight-hour day.

## Creates Job by Using His Bicycle as Workshop

**F**INDING himself out of work and with meager assets, consisting mainly of a bicycle, a grindstone, and a few odds and ends, J. E. Anderson, a woodworker of Los Angeles, Calif., solved the problem of making an honest living by transforming his bicycle into a grinding machine.

He mounted the grinding wheel on the frame of the bicycle, so that its axle could be connected with the rear sprocket by a chain. A tripod, connected with a cord so that it could be lowered to the ground, formed a firm support for the bicycle when it was lifted off the ground and utilized as a grinder.



He escaped unemployment by rigging his bicycle as a scissors grinder



## Camera Support Is an Aid in Photographing Planes

**F**OR studying the action of airplanes in flight, Anthony H. G. Fokker, the noted designer and builder of aircraft, uses a motion picture camera and a unique method of support.

When he found that it is practically impossible to photograph an airplane in flight with a motion picture camera resting on a tripod, because of the difficulty of adjusting the camera to the constantly changing angle of the object, he invented a supporting device that fits over the photographer's shoulders. With this suspension the cameraman can tilt the lens instantly to any angle and follow the movements of the plane through the finder.

The illustration shows the famous aircraft builder sighting at a flying airplane while turning the crank of the camera supported by his device.

## Some Secrets of Successful Dog Photography

**R**AW meat placed on the top of the camera is one secret of successful dog pictures. The dog must be persuaded to "watch the birdie" in various ways—by fixing his attention on some person, or on something moving at a distance, for unless the dog's attention is distracted, it will be apprehensive of the lens, and flinch when it hears the shutter click.

To photograph a dog sitting up and holding its fore paws together, which is the most difficult


pose of all, the best device is to place a bit of meat between the toes of one fore foot and order the dog to sit up. A well trained animal will obey, but will be so afraid of dropping the meat before it can be eaten that he will hold it carefully and for a time become entirely unconscious of the camera.



Meat between his paws makes him a good sitter



# Old Bridge, Doomed, Helps to Build Successor

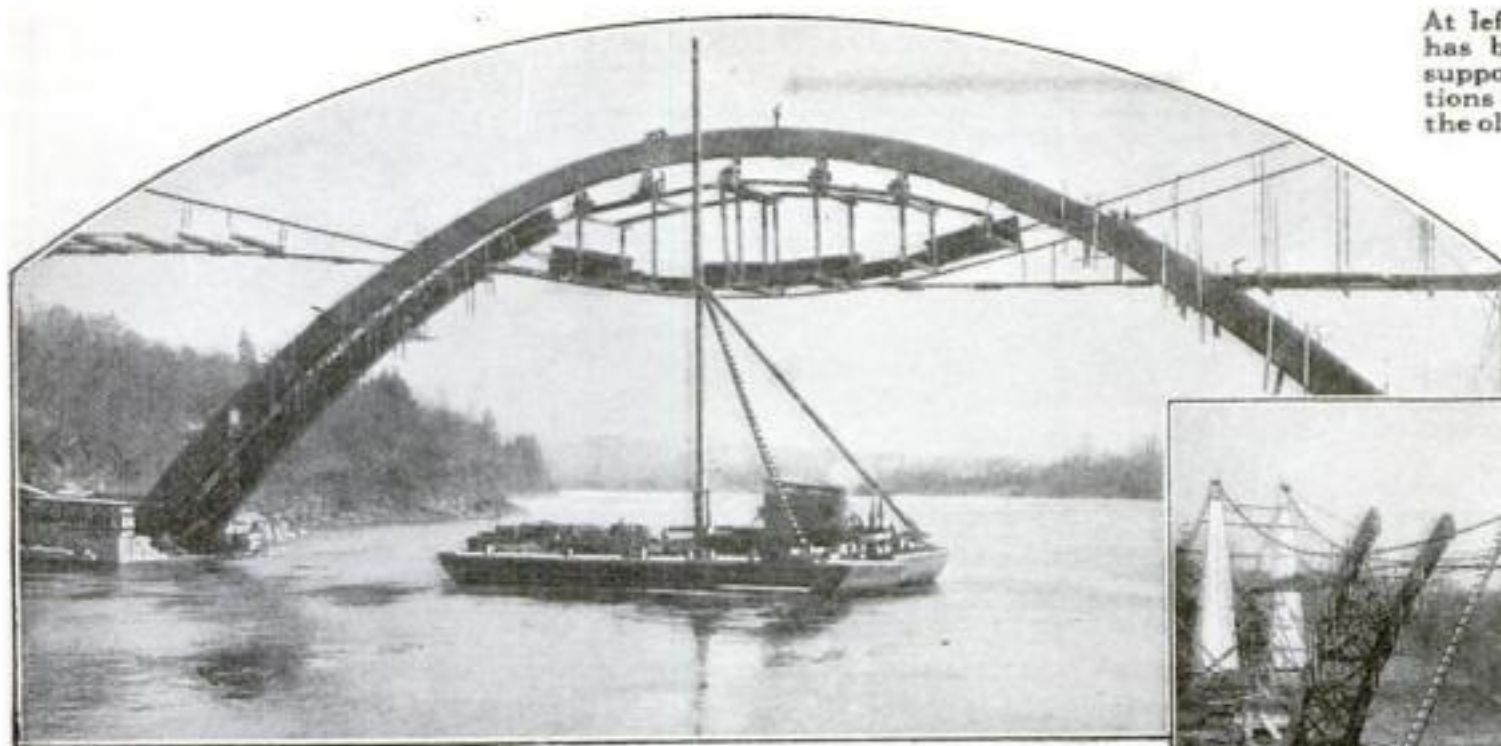

At left, one side of span has been completed by supporting the top sections on timbers held by the old suspension cables

The method of tying back the side sections by means of cables lifted over the old towers is shown below



**A**LTHOUGH declared unsafe for traffic, the 33-year-old suspension structure over the Willamette River at Oregon City, Ore., proved to be indispensable to the engineers during the erection of the new 350-foot steel arch.

When the bridge builders were prevented from constructing the usual false work, by the great depth of the river at the bridge site and the intensity of water traffic, a scheme was devised so that when a section of the new arch had been swung into position, a cable was carried from it to the top

of the tower and down to an anchor on the far side.

This procedure worked well with the side members, but the last six sections could not be supported in this manner. The engineers finally decided to use the old cable suspension as the support, although it was realized that the weight would approach the dead load limit of the ancient cables. But by working carefully and stripping away all nonessentials, the sections were lifted in

place and supported in location with bridge timbers used as blocking.

As soon as the six top sections were riveted, the old bridge was torn down.



## Hydraulic Press Makes Pulleys from Thin Paper Disks

**P**ULLEYS made of built up sections of paper disks, supported in their centers by a web of pressed steel or cast iron, are manufactured by an interesting use of glue and high pressure.

First, thin paper disks of a slightly larger diameter than the finished pulley are glued together under high pressure until sections one inch thick are obtained. After a thorough drying, the sections are placed in a lathe and cut to the correct inside and outside diameters. Holes are then drilled at frequent intervals around the edge through which dowels are passed to hold the assembled sections in position.

As many sections are placed over the dowels as are required to make up the desired width and the mass is compressed in a powerful hydraulic press. The pulley is completed by inserting an iron hub in the center of the compact paper cylinder thus formed and trimming down the bearing surface to exact size.

Because of the fibrous texture of the end grain and the fact that this bearing surface is always being re-

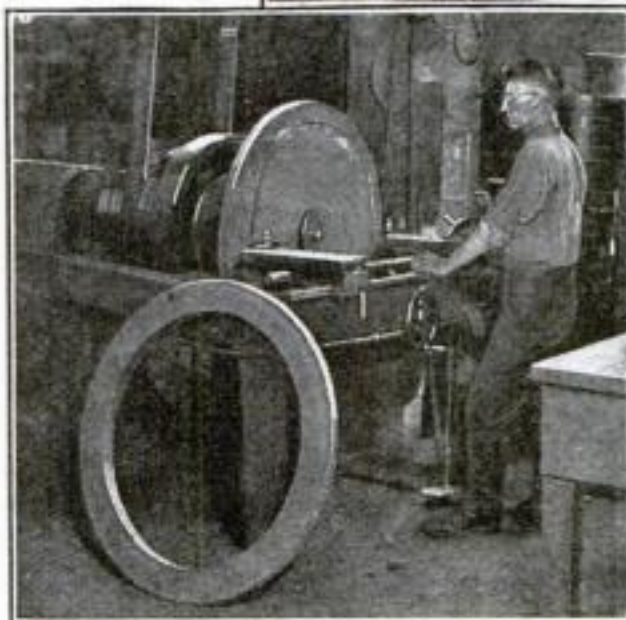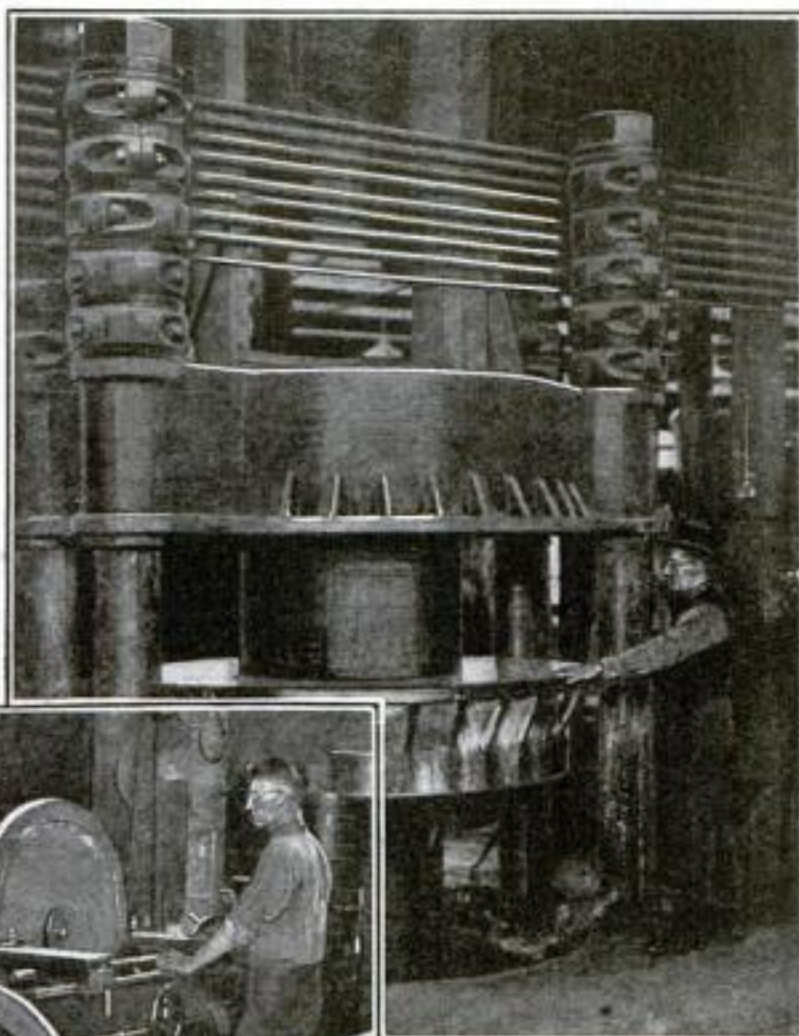

After the thin paper disks are assembled, they are placed in a powerful hydraulic press and tightly compressed. The machine at the left trims the pulley to correct diameters

newed as friction wears it away, paper pulleys are said to grip the belt better than metal pulleys, making it possible to allow plenty of slack in the belt.

## Brake Lining Is Tested on Subway Escalator

**B**RAKE linings that are compressed under a pressure of 1000 tons and woven and doped by a new process of manufacturing friction fabrics, have demonstrated phenomenal wear-resisting qualities in recent tests. A sample of the new product was recently placed at the foot of an escalator in a subway where 26,000,000 people walked across it. At the conclusion of this severe test, signs of wear were inappreciable.

The "dope," or compound, used to bind together the fibers of the fabric is largely responsible for the wearing qualities. These qualities are enhanced by placing brake lining material in a die press and shaping it to the finished form under a pressure that compacts the fibers and forces the material into a dense mass two thirds its original thickness.

The fabric is woven by a new system called "progressive weaving," in which the binder threads are placed some distance apart. This means that the top layer can be worn from a brake without reducing the holding qualities of the remaining material.



# Did Germs from Other Worlds Bring Life to Earth?

## Amazing New Theories about Living Conditions on Mars and Venus

THIS article concerns a great present-day debate among scientists over the "living conditions" on Mars and Venus, and over the question of where the life that has grown upon our earth first came from.

Far less a speculation, but equally fascinating, is the story of the evolution of life after it actually developed on earth. The actual known facts about evolution—the present scientific status of the infinitely romantic history of life on our planet—will be presented in a remarkable article forthcoming answering recent continuing attacks on the evolution theory.

By Scriven Bolton

Fellow of the Royal Astronomical Society


**D**ID the earliest forms of life on our globe—the tiny parent organisms from which we, and all existing animals and plants have sprung—first reach Earth from some other planet millions of miles away in outer space?

Even to-day, are we being showered from breeding places on other worlds with minute bacteria that spread deadly plagues among us?

Instead of being a vast, sterile void, are the far reaches of the universe in fact alive with clouds of tiny "life germs," that drift about from planet to planet, borne by the rays of Sun and stars?

Interest in these questions—which are part of a fascinating theory made famous by the great Swedish physicist and Nobel Prize winner, Svante August Arrhenius—has been revived by a current discussion among noted scientists as to actual "living conditions" on other planets—especially Venus and Mars, our two nearest planetary neighbors, the former between us and the sun, the latter with an orbit just outside our own.

In the last published annual report of the

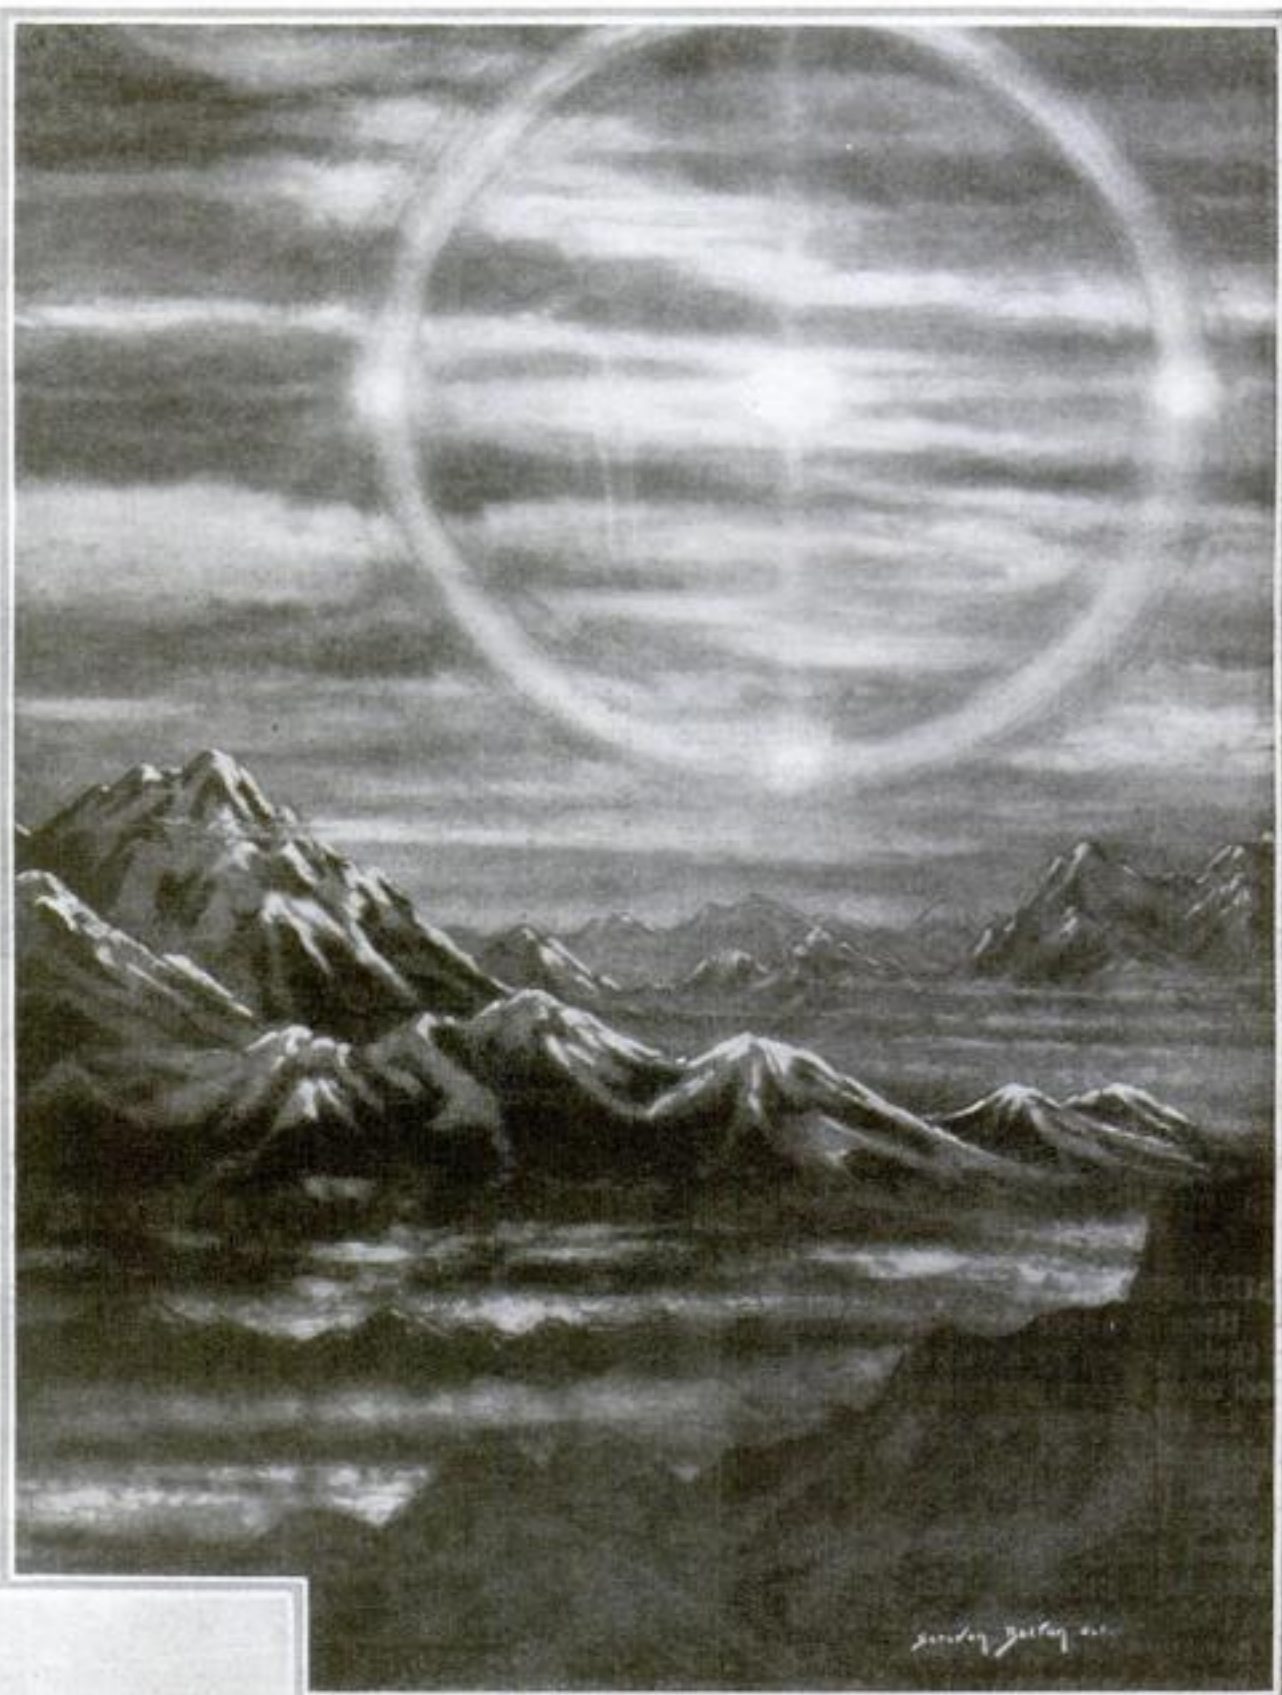


Illustrations © Popular Science Publishing Co., Inc.

### Typical Landscapes on Venus and Mars

**A**BOVE is a typical landscape on the planet Venus, as imagined by Scriven Bolton. The Venusian mountains, he says, are twice as lofty as our highest. Because the atmosphere has been supposed to be dripping with dense fogs and heavy clouds, followers of the famous Arrhenius theory believe that this sister planet of ours may be a universal breeding ground for lower species of life germs and for disease bacteria spores. The supposed atmospheric conditions would create an almost continuous exhibition of beautiful solar halos, as shown in the illustration.

The landscape of Mars, as typified at the left, is now supposed to be exactly the reverse. Ocean basins, such as the "sea" known as Syrtis Major, depicted in the imaginary illustration, are declared to be frigid swamps, while the continents are believed to be covered with dry frozen sand, in which life is utterly impossible.

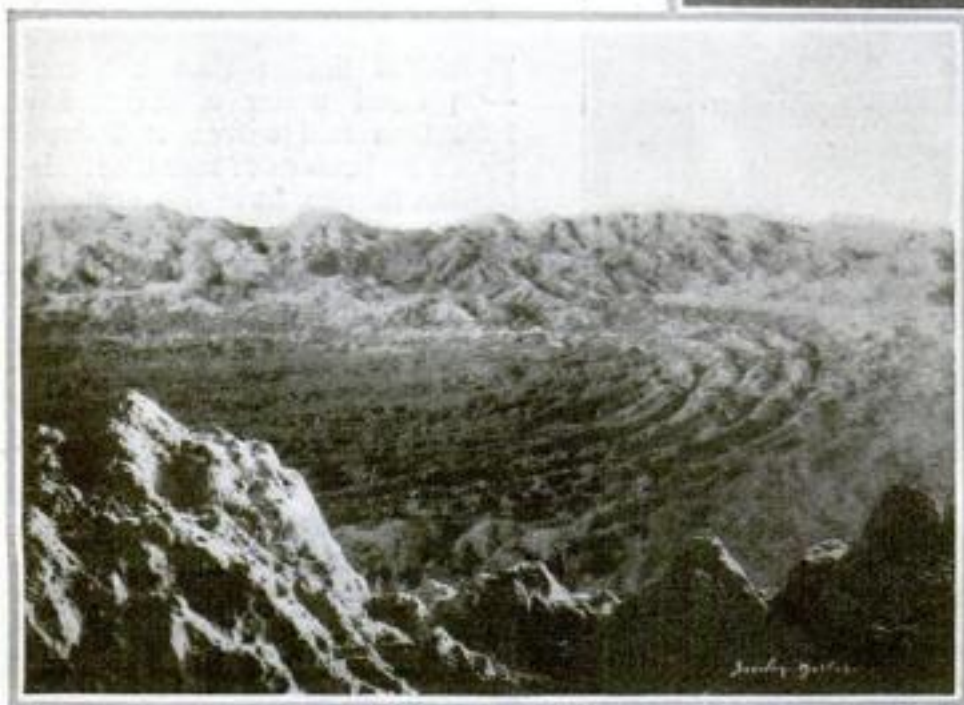

Smithsonian Institution, C. G. Abbott, its assistant secretary, argues that recent astronomical evidence proves Mars to be lifeless, with an average temperature of 60 degrees below zero, and a climate drier than the Sahara.


Doctor Arrhenius has lately come to the same conclusion about Mars, believing it to be an arid desert of frozen sand, while

Venus, on the contrary, may have a "soggy," cloudy atmosphere, ideal for the breeding of lower forms of life.


These recent assertions that Mars has an utterly frigid and airless climate have been promptly questioned by Prof. William H. Pickering, of the Harvard Observatory in Jamaica, W. I., world famous student of the Martian canals. While it is now widely

accepted by astronomers that the so-called "canals" of Mars are not artificial streams of water, Professor Pickering declares they may well be bands of vegetation. He says, further, that the spreading ice caps seen about the poles of the great red planet are, in fact, frozen water, and not the deposits of frozen carbonic acid gas that other astronomers consider them to be. Professor



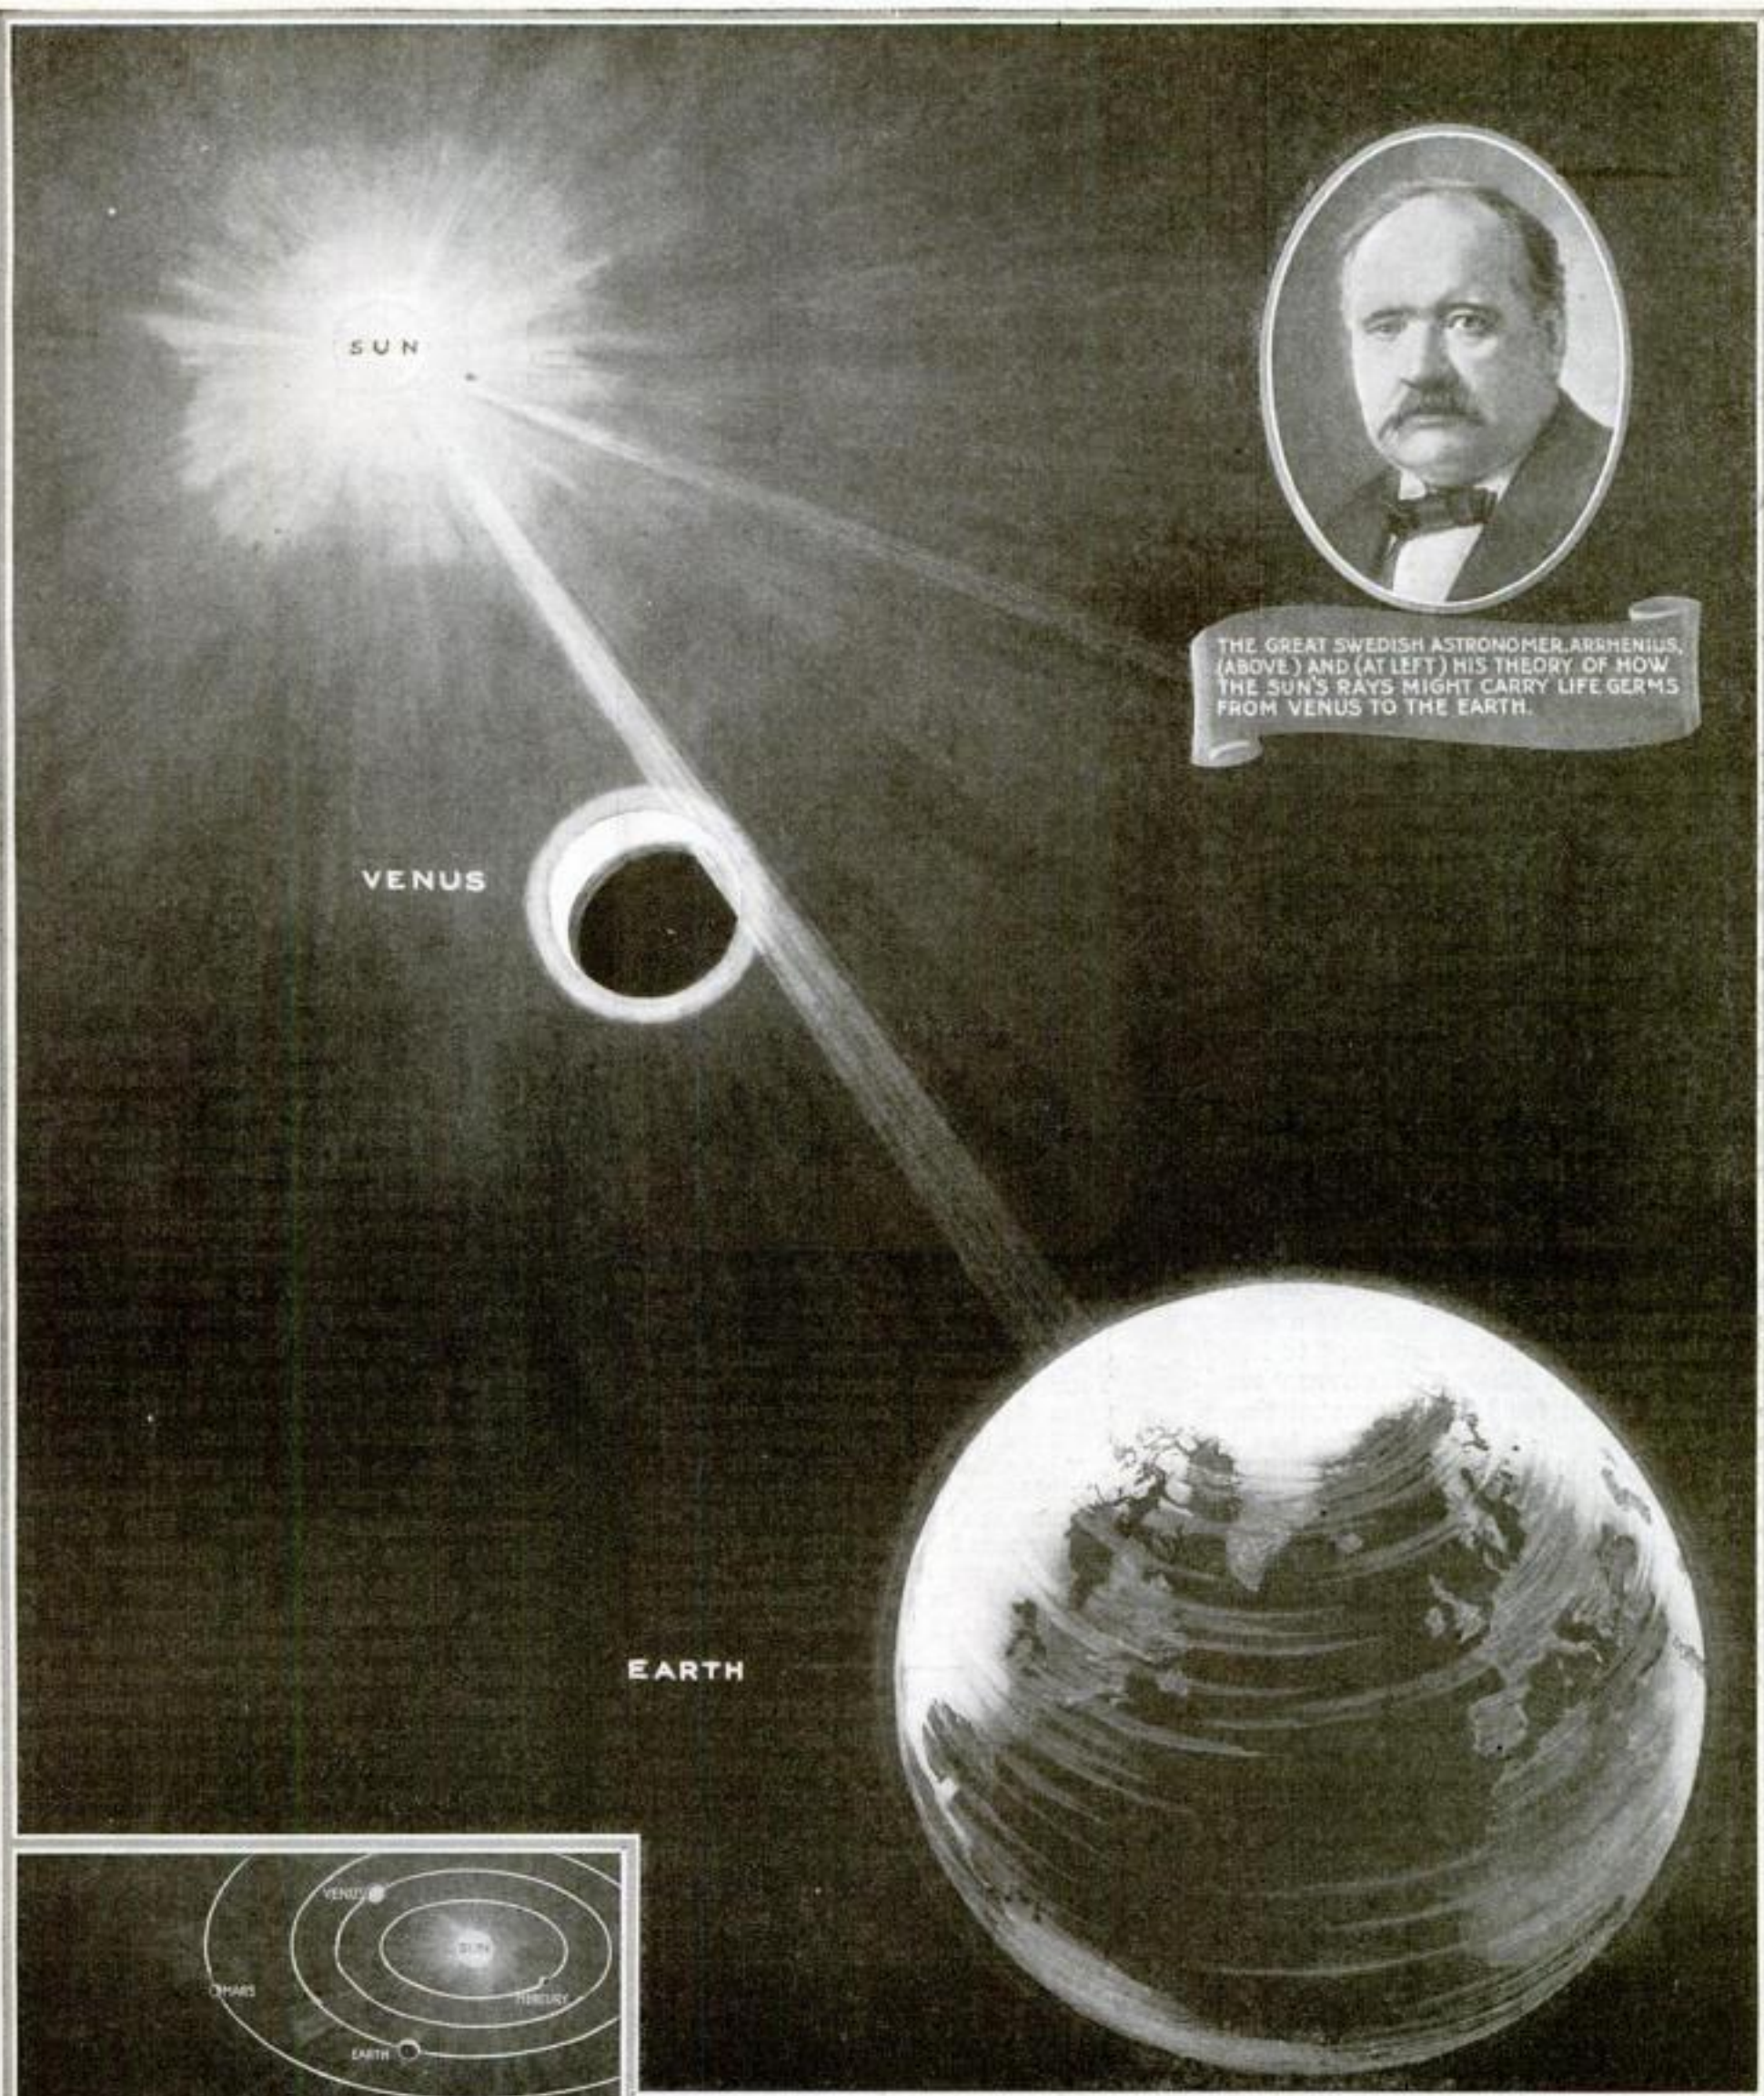

THE GREAT SWEDISH ASTRONOMER, ARRHENIUS, (ABOVE) AND (AT LEFT) HIS THEORY OF HOW THE SUN'S RAYS MIGHT CARRY LIFE GERMS FROM VENUS TO THE EARTH.

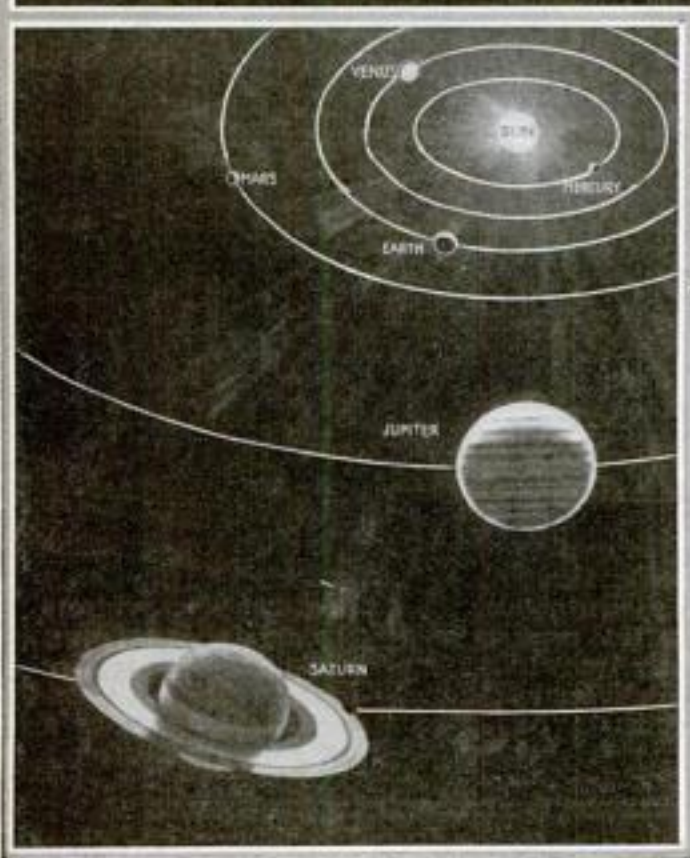

Illustrations © Popular Science Publishing Co., Inc.

## How Sunlight Might Carry Life from Venus to Earth

**W**HEN the planet Venus passes between Sun and Earth, according to Professor Arrhenius, rays of sunlight, pressing through Venusian atmosphere, might hurl into space countless particles charged with disease bacteria spores and animal and plant

seeds. Some of these particles might ultimately reach Earth.

The picture at the left, showing relative positions of Sun and planets, illustrates Professor Arrhenius' theory that sunlight corpuscles may be the distributors of life throughout our solar system.


Pickering brings forward, anew, technical evidence to show that there is water vapor enough on Mars to permit of some sort of vegetation, or other life, existing there.

While these two opposing theories


about conditions of life on Mars are still being argued by astronomers of the utmost eminence, the theory that Venus—the planet nearest to Earth and very like it in size—may have an atmosphere

*(Continued on page 97)*



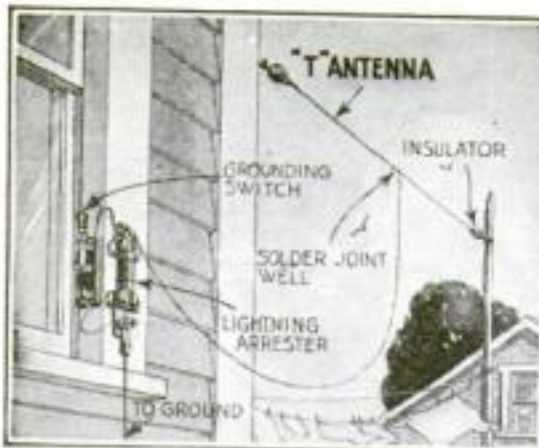

Where a number of scattered broadcasting stations are within range, the "T-type" aerial (at left) is best. If only one good station is within range, the most efficient aerial is the "inverted-L type" (at right), with lead-in coming from the end pointed toward and nearest to the broadcasting station. Above, three steps in soldering ground to water pipe

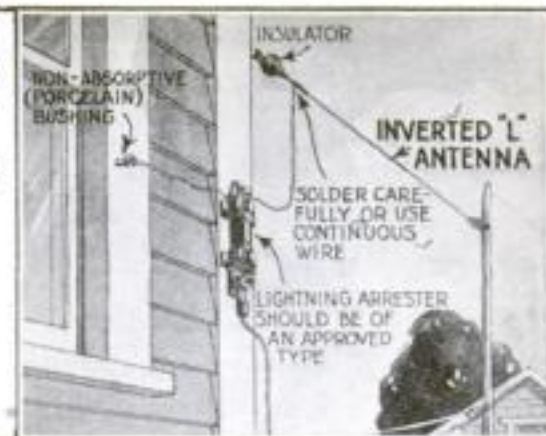

# Jack Binns' Ten Commandments for the Radio Fan

## First Series: How to Get Better Results with Your Crystal Detector Outfit

By Jack Binns

A FAMOUS radio engineer of my acquaintance quite recently constructed one of E. H. Armstrong's super-regenerative circuits, and undertook a short series of experiments with it. At the conclusion, he summed up his opinion of the new system in these words: "It's no blankety-blank good!"

Now the fact is, of course, that the Armstrong super-regenerative circuit is not only good, but epoch-making. On the other hand, if a thoroughly experienced and competent engineer, who knows radio from A to Z, is unable to get satisfactory results with it, and gives up the attempt after a brief trial, just think how difficult success with it will be for the novice!

### Novices Must Be Patient

In other words, at the present stage the super-regenerative receiver is not a circuit for the inexperienced to attempt to build. Many POPULAR SCIENCE MONTHLY readers have asked for help in constructing a set of this type. My best advice to all of them, except the most capable old-time amateurs, is to continue to make the most of present standard apparatus. There is no telling how long it will be before the super-regenerative circuit is refined by the engineers, standardized in commercial sets, and put out in such shape that the novice can easily operate it.

To make the most of the present highly efficient types of radio apparatus, certain fundamental rules and methods ought to be followed that can be most clearly presented in the form of "Ten Commandments for Radio Users." This month, I am presenting Ten Commandments for the crystal de-



**JACK BINNS**, America's most popular writer on radio, who writes here-with the first of his series of "Ten Commandments for the Radio Fan." Your successful operation of various types of receiving sets, and your enjoyment from radio broadcasts this winter will be enhanced if you profit by the advice Binns offers in this unique series. Next month he will give his Ten Commandments for using the single circuit vacuum tube set and in the January issue a third series of Commandments for operating the feed back circuit

tor set, to be followed next month by Ten Commandments for the single circuit set, and thereafter by Ten Commandments for operating the feed-back circuit. No matter what type you are using, the following points about the crystal are fundamentally important to you.

The function of a crystal set is, after all, extremely simple. It is a valve that automatically cuts alternating current in two, allowing one half of the current to flow in the circuit attached to it, and stopping the other half of the current. The reason why the crystal is generally not good for more than about 25 miles in receiving phone broadcasts, while it will receive wireless telegraph signals over vast distances, is simple.

### All Depends on the Power

Everything concerned depends upon the power of the transmitting station. We rate this power in watts. Now, suppose a station has a rated output of 1000 watts—or, in other words, 1 kilowatt—so far as its carrier wave is concerned. If this carrier wave were used for interrupted continuous wave telegraphy, it would be quite possible for a crystal detector to receive the signals over a distance of 150 miles, under any conditions. But when this same carrier wave is used for the purpose of transmitting the voice or music, the distance is often cut down to approximately 25 miles. Why is this?

Because, in simple language, the amplitude of the wave used for telegraph code signals remains constant. The dots and dashes come in at the maximum of efficiency all the time. In the case of broadcasted voice and music, however, the amplitude varies over extremely wide ranges, according to the modulated output of the transmitter. This can be easily understood when you stop to notice the varying strength of tone and volume in different words and sounds uttered around you. In fact, some words can be heard and distinguished at greater distances than others.

Now, with these fundamentals in mind,

## How to Take Care of Your Crystal and Test Its Quality



How to preserve and handle crystals to keep them sensitive. Don't hold them with your hands, but use pliers or tweezers




For emergency use or to test the quality of your crystal, attach it, with a second crystal, to a double throw switch, as shown above. The comparative merits of the two crystals can then be determined instantly by switching one of them out of the circuit and the other into the circuit



A glass cover protects the crystal from dust, while a firm rubber sponge under the detector unit acts as a shock absorber



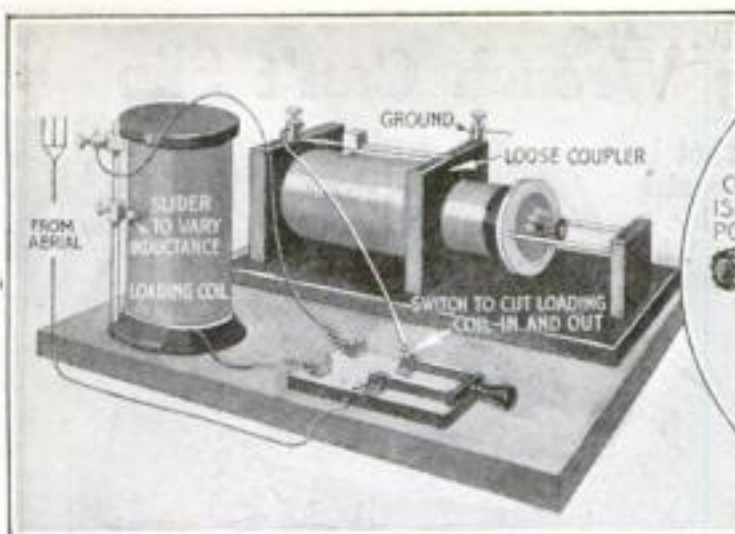


### How to Use a Loading Coil

The loading coil which, in short wave reception, detracts from the efficiency of the set if left in the circuit, may be used to advantage in reaching longer wave lengths in the manner shown above. By means of a double-throw, double-pole switch, the loading coil may be cut in the circuit when long wave reception is desired.



### For Good Connections

To insure good contact in ball-and-socket types of crystal detector, solder a light, flexible wire to the arm that holds the catwhisker, then solder the other end of the wire to the base of the holder.

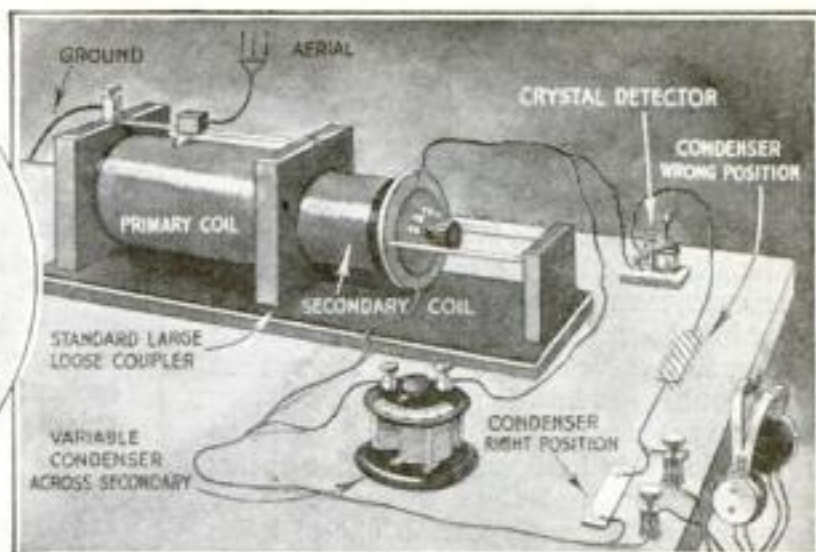

### Where to Place Fixed and Variable Condensers

The correct position for a fixed condenser is in shunt across the ends of the telephone cord lugs, where it clears up signals in the circuit. Many radio beginners have placed the condenser in series with the detector and telephone. In using the desirable "double circuit tuner," shown above, a variable condenser should be shunted across the secondary.

here goes for the Ten Commandments for Crystal Detector Users:

**1. Do Not Use a Loop Aerial with a Crystal Detector.** We have heard a lot of talk about hooking up a crystal set to a bed spring, a fire escape or a back fence. The sooner radio fans get these ideas out of their heads, the better their results will be. The crystal detector requires the best of aeriels. It is possible, of course, for the amateur to receive radio-telephone concerts on a crystal with freak or loop aeriels—provided he is near a broadcasting station. But for thorough enjoyment of all available broadcasts, the one

best aerial is the "T-type;" and for reception on 360 meters this should have a flat top at least 150 feet in length. The lead-in should be soldered at the middle of this, and the aerial should be free and clear of all objects, the higher the better, up to 60 feet from the ground. This aerial is particularly good for the vacuum tube operator as well.

The user of the crystal detector set, however, should not employ this type of aerial unless there are a number of broadcasting stations within range of his set, and situated at different angles from him. If there is only one good station in which he is chiefly interested, the most efficient aerial

will be the so-called "inverted L type," pointing toward that station. For this aerial the flat top should be as near 100 feet in length as possible. The lead-in should be a continuation of the aerial, and should come to the apparatus from the end of the aerial nearest in direction to the broadcasting station it is desired to listen to.

### 2. Do Not Make Your Ground Connection with a Gas Pipe.

Gas pipes are insulated at certain points for protective purposes. The best possible connection that can be obtained is upon the water pipe. Do not rely solely upon a ground clamp to hold your wire to the pipe. Carefully clean the surface of the water pipe, and then solder your ground wire to it.

### 3. Solder All Connections Between the Various Pieces of Your Apparatus.

Soldering is necessary because it makes a continuous electrical connection throughout the set, and reduces its total resistance. Every joint is like a little door, which, if not weather-stripped, will permit all sorts of drafts to filter through. If the connections of a radio set are not soldered, there will be, likewise, all kinds of little leakages.

### 4. Handle Your Crystal with Care.

Do not, under any circumstances, take hold of it with your hands. If you do, you will leave a film of grease on its surface which will prevent you from finding a sensitive spot for reception. If it is necessary to move the crystal for any purpose, take hold of it with a pair of round-nosed pliers or a pair of tweezers.

Make sure that the crystal is securely fastened in its holder. Cover the holder and crystal with some moisture and dust-proof material. Do not forget that if you are using galena as your crystal, the catwhisker should only just touch the surface of the crystal. Under no circumstances should pressure be applied to it. This is very important. The contact should nevertheless be firm, so that slight vibrations will not jar it from its position.

If possible, mount your crystal detector unit on a shock-absorbing device. Try heavy, resilient rubber, a firm rubber sponge, or even corrugated cardboard.

Be sure that the movable parts of the crystal holder are making good electrical connection at all times. Most of the movable parts are made on the ball and socket

## The World's Most Powerful Vacuum Tube

**P**ERFECTION of the most powerful vacuum tube in the world—the 100-kilowatt giant just produced by engineers of the Bell laboratories—is undoubtedly the outstanding radio development of the month. One of these tubes would be sufficient to maintain constant wireless telegraph communication across the Atlantic Ocean, while four of them, joined in parallel at the gigantic transatlantic wireless stations, should permit continuous telephone conversations between New York and European capitals under all conditions.

### Difficult Problems Solved

At first glance, it may not seem remarkable that such a powerful tube should have been developed, but experience has demonstrated that when the output of an ordinary vacuum tube is extended beyond one kilowatt, a series of practical difficulties arises, and among them are the problems of cooling the tube so that it can be kept in continuous operation, and also of maintaining the vacuum.

In the new tube, these difficulties have been overcome. The metal has been sealed to the glass, so that a variation in temperature ranging from that of liquid air to more than 300 degrees above zero, Centigrade, fails to sever their connection, or break down the vacuum of the tube.

Another unique feature is the system of water cooling. The plate of the tube is on the outside of the glass, but sealed to it. It is the long, dark-colored metal cylinder shown in the above photograph. In use, this plate rests in a deep socket, where water is circulated to keep the huge tube



Here is the new 100-kilowatt vacuum tube in the hands of W. G. Housekeeper, who was largely responsible for developing the water cooled tube in the Bell laboratories

cool. Grid and filament are inside this cylindrical plate.

Not only does this new development offer immediate opportunity to bring about reliable transatlantic telephone conversation, but it brings the day nearer when we may replace with such tubes the ponderous and costly alternators now used for long-distance wireless communication and those used for power transmission, as well.



principle, and a loose connection there is a very common thing. If you are in doubt whether the arm that holds the catwhisker affords a good electrical path, solder a light, flexible wire to it, and then solder the other end of the wire to the base of the holder, where the arm is fastened. It may not look nice, but it will materially increase your enjoyment. Many times, when you are vainly searching for a sensitive spot on the crystal, investigation will show that your trouble lies in this movable arm.

If you are mechanically inclined, put two crystal detector holders on a double throw switch, and connect them in such manner that you can instantly switch one of them out of the circuit, and switch the other in. Thus, if you are in doubt about the quality of the crystal you happen to be using, you can quickly test its merits with the other crystal.

**5. Don't Bow Down in False Worship to Galena.** The lead that galena enjoys over other crystals in the matter of sensitiveness is more than overcome by its susceptibility to vibration. The slightest jar will loosen its contact from the sensitive point, and a considerable portion of the concert may be lost entirely, while you are searching for another sensitive spot.

Silicon, while not so sensitive, is much more rugged. The so-called Perikon detector, composed of two crystals making contact with each other, is almost as good, and less troublesome than galena. It will pay you, also, to try out carborundum. With this crystal the contacting arrangement can be screwed tightly on the crystal, so that even the heaviest vibration cannot shake it loose. However, in using carborundum, it is necessary to add a small potentiometer to your circuit, and use a dry cell, so that a low voltage can be placed on the crystal.

**6. Treat Your Telephones with Consideration.** Do not forget that the telephone is one of the most delicate and sensitive of all inventions. It will respond to currents which are far too small to actuate other common apparatus. With a crystal detector you cannot get results from a 75-ohm telephone, such as is used by the telephone companies. Your telephones should have a resistance of at least 1000 ohms. But remember that the resistance of a telephone is no guide to its sensitiveness. In radio, telephones are rated by the direct current resistance of their coils for the sake of convenience only. In these telephones it is necessary to have a large number of turns in the coils about the magnets, in order that the feeble currents that pass through them may actuate the magnets sufficiently to vibrate the diaphragms, and consequently it is essentially the number of turns and efficiency of the winding that determine the telephone's efficiency.

**7. Do Not Overload Your Tuning Circuit.** Remember that in using a crystal detector your range is extremely small, and consequently it behooves you to do everything possible to get the maximum results out of your set. If your aerial tuning inductance has a large number of turns, it will cut down the efficiency of your receiver, unless in some way the "dead" ends—or, in other words, the unused portion of the tuning coil—are short-circuited.


I find that a great many radio fans think a loading coil added to their tuning inductance will, in some mysterious man-

## This Self-Fitting Wrench Can't Slip

A WRENCH with parallel jaws that is instantly self-adjustable to the size of the work has been brought out by a tool manufacturer in Baraboo, Wis. The wrench is made in 10 different sizes to accommodate work up to 4 inches in diameter. The principal feature of the tool is a sliding fulcrum that insures a powerful grip by causing the force of the lever to be exerted close to the load.

To use the wrench, the handles are spread apart and the jaws slipped over the work. As the handles are brought together, the fulcrum slides toward the work until the jaws are parallel. By providing this unusually long leverage, the work once gripped is held tight until released.

A flattened surface on the back of the wrench serves as a convenient hammer and one of the handles is sharpened to form a screwdriver.

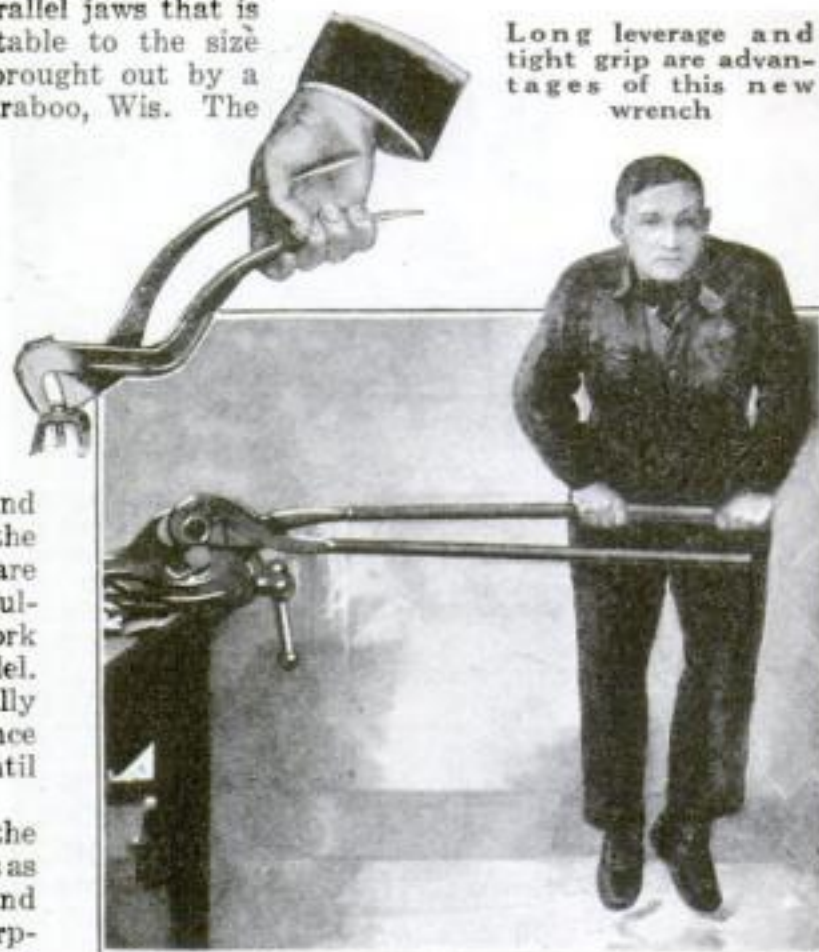

ner, increase their range. This is an unfounded assumption. Loading the inductance of a receiving set merely helps it reach longer wave lengths than those for which it was originally designed. A loading inductance, when left in the circuit while the circuit is being used for short wave reception, detracts from the normal efficiency of the set.

**8. Don't Commit Assault upon the Circuit with Fixed Condensers.** The only place for a fixed condenser is in shunt across the ends of the telephone cord lugs. There it forms a by-pass for the high-frequency currents which manage to escape past the crystal, and helps to clear up the signals in the circuit. Do not forget that all inductances in the form of coils have distributed capacity in their windings, and unless you place a variable condenser in the oscillating circuits, you

will not be improving your results to any appreciable extent. Capacity is very necessary in oscillating currents, but it must be carefully balanced.

Quite a number of radio fans who have been in trouble with crystal sets have sent me their wiring diagrams, and in many cases I have observed that they have placed a fixed condenser in series with their crystal detector and the telephones. This reduces the efficiency of the circuit.

**9. Let Your Radio Waves Travel Only the Straight and Narrow Path.** This commandment is laid down particularly for those fans who construct their own receivers. Do not place your telephones in shunt across the crystal. The only place for the telephones is in series with the crystal and the return lead to the tuner.

**10. Learn How to Use Your Tuner Properly.** Remember that the double circuit tuner is far better than the single circuit, in cases of interference, which it will not entirely eliminate, but will materially reduce.

By a "double circuit tuner" I refer to a loose coupler, or variocoupler. With such a circuit there are three tuning elements, and the best results are obtained when all three are properly adjusted. First, there is the primary circuit, which consists of the primary winding of the coupler in series with the aerial and a variable condenser. Next, the secondary winding of the coupler, which should have a variable condenser shunted across it. And then the variation of the coupling between the primary and secondary coils of the coupler.

If you use a variocoupler, do not expect it to function perfectly without a variable condenser across it. Remember that the windings on the secondary of this instrument are not tapped in any way, and therefore cannot be varied; consequently, the variable condenser is absolutely necessary, in order to tune up the secondary circuit into resonance with the incoming signal.

### \$50 in Prizes for Interesting Photos

TWO remarkable photographs combine to tell a fascinating story of engineering resourcefulness—a story of how an old, condemned bridge across the Willamette River in Oregon was used as an indispensable aid in the erection of a new steel span—and win the **FIRST PRIZE** of \$25 this month in **POPULAR SCIENCE MONTHLY'S** \$500 camera contest. The first prize-winner is **Ralph J. Eddy** of Oregon City, Ore., and the photographs appear on page 39 of this issue. Other prize-winners are:


**SECOND PRIZE, \$15—Felix J. Koch**, Cincinnati, Ohio. Subject: "Engine Winds Circus Tent on Spool" (see page 54).

**THIRD PRIZE, \$10—Miss Dora Gross**, Memphis, Tenn. Subject: "How Detachable Reel Holds Hose without Kinking" (see page 35).

THE monthly camera contest will be concluded with announcement of prize-winners in the January issue.



# Tiny Trains Aid Engineers in Race with Flood

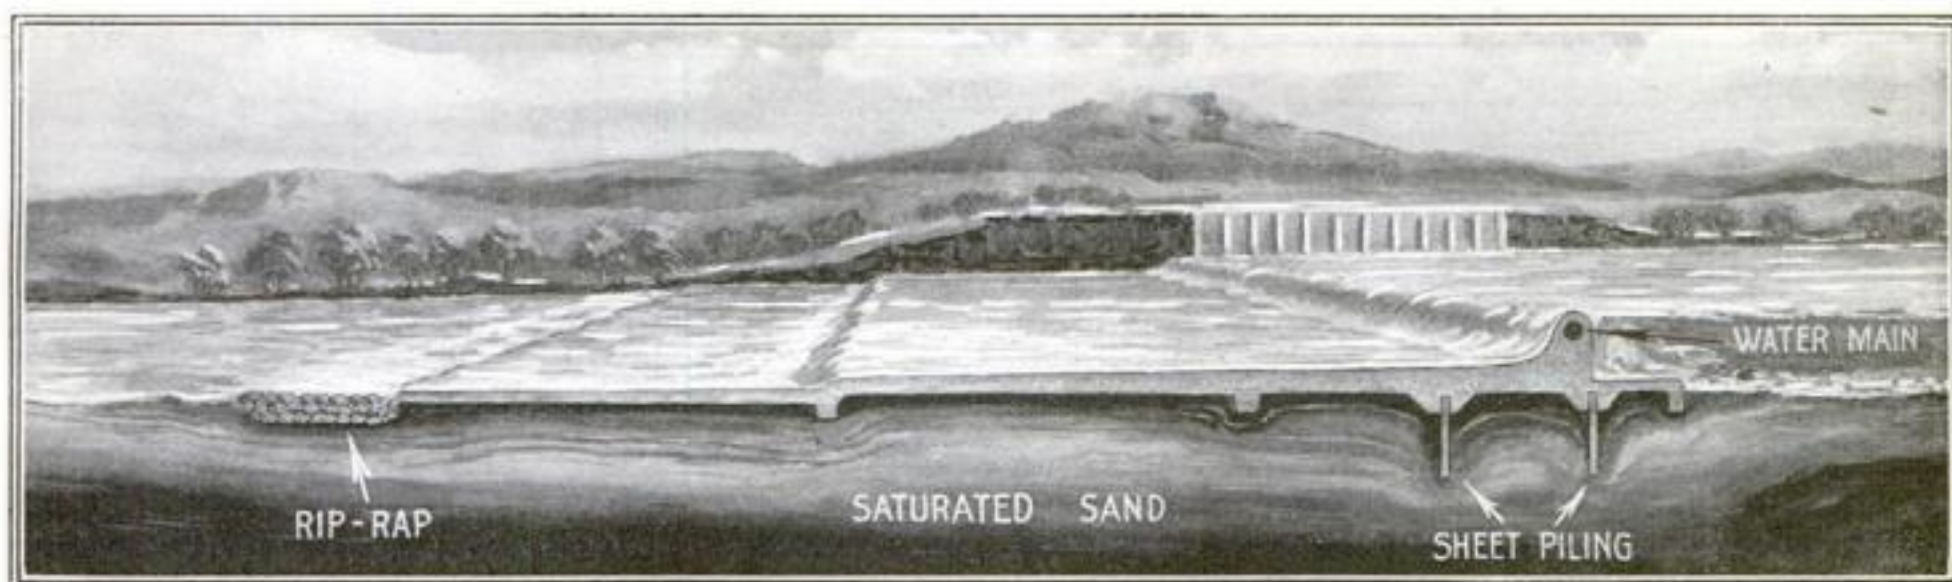

**R**ACING against time in a long-odds attempt to complete a floating concrete dam across the Gila River in Arizona before floods set in, engineers of the United States Indian Bureau finished the work recently, just seven days before the torrents poured down the river bed. The dam, although of a type not previously tested, withstood the tremendous pressure so successfully that other floating dams probably will be erected where embedded dams are found unsuitable.

Usually, in preparing a dam site, excavations are made to "hard pan;" but probes at the Gila location failed to touch solid bottom. It was decided to design a dam made of concrete slabs resting on the fine-sand river bed with precautions taken to prevent the underflow from lifting the dam and carrying it away. This called for sheet piling and an anchorage on the upstream side and a long tapering apron on the downstream side.

The dam, as finally completed, consists of a spillway 15 feet high and 400 feet long, with a concrete slab apron extending 212 feet downstream. A cement flume 42 inches in diameter passes through the spill-

Completed, the dam "floats" on saturated sand over a wide apron of concrete slabs. Sheet piling at the upstream end anchors the structure and prevents underflow. In the background are the sluice gates through which water passes to an irrigation canal.

way from one end to the other to supply a canal on one bank. Two rows of sheet piling were driven into the subsoil under the fore part of the dam to check the underflow. At the extreme lower end an area of rip-rap was laid to prevent undermining.

That the construction of the dam was completed in the short time available before the floods came rushing down the river, was due to the ingenious system of tramways and dump cars devised by the engineers in charge.

Two elevated railways carrying narrow gage tracks and in the form of narrow ovals were built out into the river, and a concrete mixer was placed above the track at one end of each oval. Motive power was supplied by stripping down four small automobiles and replacing their rims with flanged wheels.

When all was ready, each little locomotive hooked on to a dump car and drew it under the spout of the concrete mixer, where it received its load. The miniature train then traveled across the river at a

surprising rate of speed to the hoppers down which the liquid concrete flowed to the slab forms. The trains made a round trip every six minutes and although the load each trip was not extraordinary, the total quantity of concrete that was handled taxed the capacity of the big mixers.

With the completion of the canals fed by the water of the Gila dam, the Government has reclaimed 62,000 acres of land.

## Trout Guarded from Birds by Explosive Lantern



**T**HE manager of a trout farm, on the outskirts of Salt Lake City, formerly lost many fish through depredations of herons and cranes, which made a practice of visiting his ponds during the night.

Now the trout are protected by an explosive acetylene lantern that goes off with a bang every 15 minutes. The cost of operation is less than 15 cents a night.

The larger vertical cylinder is the generator, with a two-quart water tank at the top. The carbide is placed in the lower chamber, where the slowly dripping water produces the gas.


The smaller cylinder is the explosion chamber. A small pipe, with an air inlet to modify the density of the gas, connects the two. Another tube supplies a pilot light, which periodically fires the acetylene in the explosion chamber through a vent.



Tiny improvised locomotives (inset) sped around oval tracks, built across the river bottom, carrying concrete from mixers to forms as the floods gathered higher up the river



## Booster Helps Locomotive Make Grades

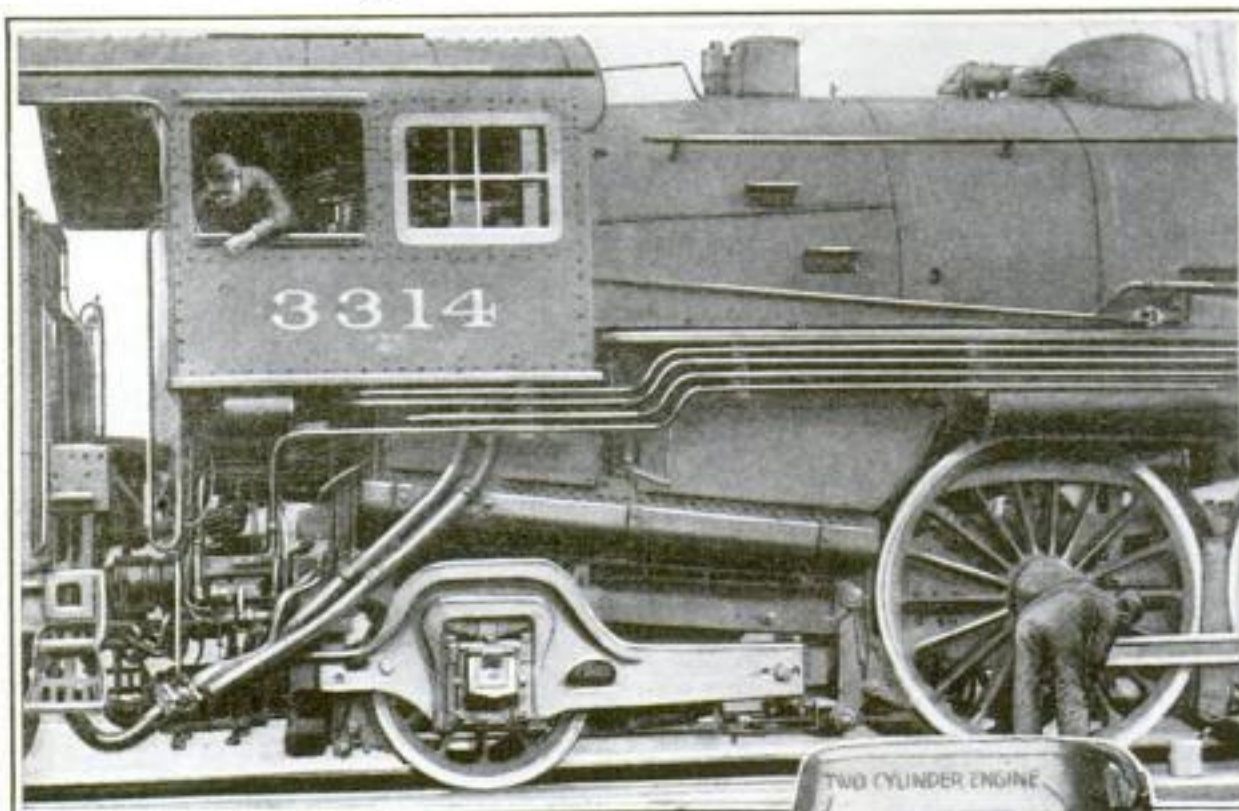


The "booster" attachment is shown above in its position over the wheel of the trailer truck, directly under the engine cab and back of the rear drive wheel. At right: Two pistons working through gears convert trailers into driving wheels.


**B**ECAUSE the advanced types of locomotives are approaching the weight limits of track and roadbeds, the use of the "booster" is becoming wide-spread.

The booster is a supplementary driving unit exerting its force on the idle trailers and utilizing them to aid the tractive effort of the locomotive.

The booster is a two-cylinder engine supported upon a cast steel bed plate, which also forms the axle bearing and truck support. Weighing only 3500 pounds, the booster is said to add from

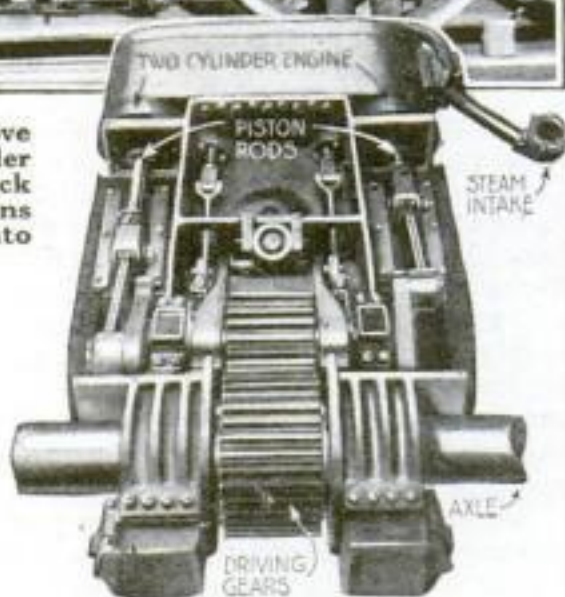


25 to 40 per cent to the locomotive's pull. It is controlled by the standard throttle, and when the engine reaches road speed is automatically disengaged.

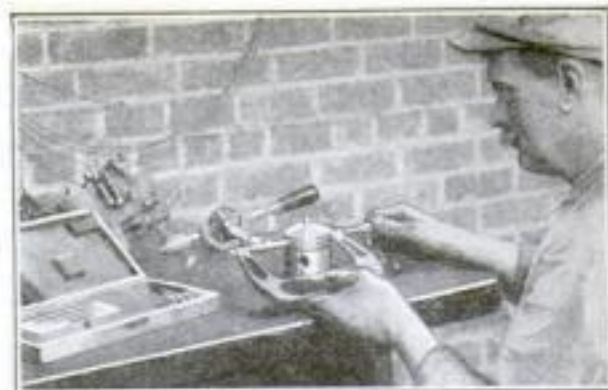

## Micrometer Caliper Has Four Inch Variation

**B**ECAUSE of the increasing number of small pistons on automobiles, a new micrometer caliper that will take measurements from two to six inches has come into wide use.

The four-inch variation is made possible by four interchangeable anvils furnished

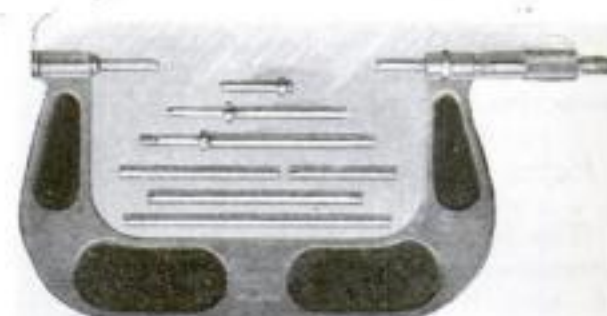

Insertion of the proper anvil in the tool shank provides a micrometer that will measure diameters from two to six inches.

with each instrument. Each anvil is held in place by a knurled nut.

The shape of the micrometer frame adapts it to all kinds of work and makes the instrument an easy one to handle.


## Six-in-One Auto Gage Worn as Watch Charm

**N**UMEROUS jobs around the automobile, such as setting valve tappets, distributing head points and spark plug gaps, as well as fitting piston heads and determining the correct thickness of shims, are simplified by a special six-in-one gage recently perfected.

The gage consists of six blades varying in thickness from .0015 inch to .015 inch and arranged in a common holder so that any of them may be used in combination to measure distances up to .0315 inches. An eyelet punched in the holder permits the owner to wear it on a handy chain if desired. Although accurately ground to size, the gage is ruggedly made.



This thickness gage, with its six blades, will make accurate measurements up to .0315 inches.

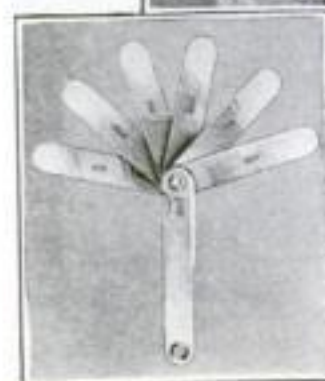

## Battery Frozen in Block of Ice Is Unharmed

**F**ROZEN inside a solid block of ice, a dry battery of new design recently drove an automobile through the streets of Denver, Colo., for five days. Special plates, a special separator, and a secret formula for the electrolyte are given by the inventors as the explanation of this unusual feat.

Following the freezing test, the battery was completely discharged, and after a few moments' rest, was recharged again by the use of the car's generator.



This test was devised to show resistance of battery to winter temperatures.



© Ewing Galloway

## Pocket Adder Calculates in Millions

**S**UMS up to nine million dollars may be added on a new pocket calculator only five inches long, 3½ inches wide and half an inch thick, and selling for only two dollars. The miniature machine will add or subtract as conveniently as any of the larger machines.

The calculator consists of nine rows of figures with a sliding slot beside each. To add, a stylus inserted in the slot opposite the number, is pushed upward. The next number is treated in the same manner, except that in case the indicator opposite the number shows red, the stylus is pushed down instead of up.



# Designs Concrete Arches with Microscope

## Scientist Invents Method of Using Frail Paper Models to Test Strength of Complicated Engineering Structures

**T**HE skyline of America would reveal many more attractive concrete structures if engineers, instead of adhering to the staid and limiting processes of mathematical analysis, would make wider use of a new mechanical method of studying concrete buildings, according to Professor G. E. Beggs, of Princeton University. Professor Beggs' statement is based on results of tests obtained with a simple apparatus of his own invention in which he uses models of structures of which the theoretical characteristics were already known.

### Paper Model Structures


The layman can hardly appreciate the immense amount of careful computation that is required from the designing engineer for even the simplest of concrete arches. Recognizing this drawback in solving so-called "indeterminate structures," Professor Beggs has worked out a method of microscopical measurements, employing celluloid or paper models that duplicate perfectly the behavior of actual structures.

The device is based on the action of a lever suspended at a point other than the center and weighted with a known weight at one end. By measuring the distance that the weighted end goes down and the corresponding distance that the free end moves up, it is possible to find the exact weight that must be added to the free end to balance the lever.


### How the Model Is Set Up

When the characteristics of a complicated structure are to be determined, Professor Beggs cuts a small model from celluloid or paper, with thickness and length carefully proportioned to the original. This model, supported by bearing balls, is placed on a flat drawingboard. Various attachments are added to the model, depending on the type of structure and on the data desired. In the case of a single arch where the designers wish to know about the strains at one end of the arch when different types of loads are applied, the other end is fastened to the drawingboard, just as it would be if the arch were supported on its abutment. At the free end, a small device called a "deformeter gage" is fastened.


The deformeter gage consists of two parallel metal bars four inches long and .4 inch wide, arranged so that one is fastened to the drawingboard by steel pins and the other allowed to move freely. The end of the model structure is fastened rigidly to the movable member. At each side of the center line of the two bars a V-shaped cut receives gage plugs. There are five sets of

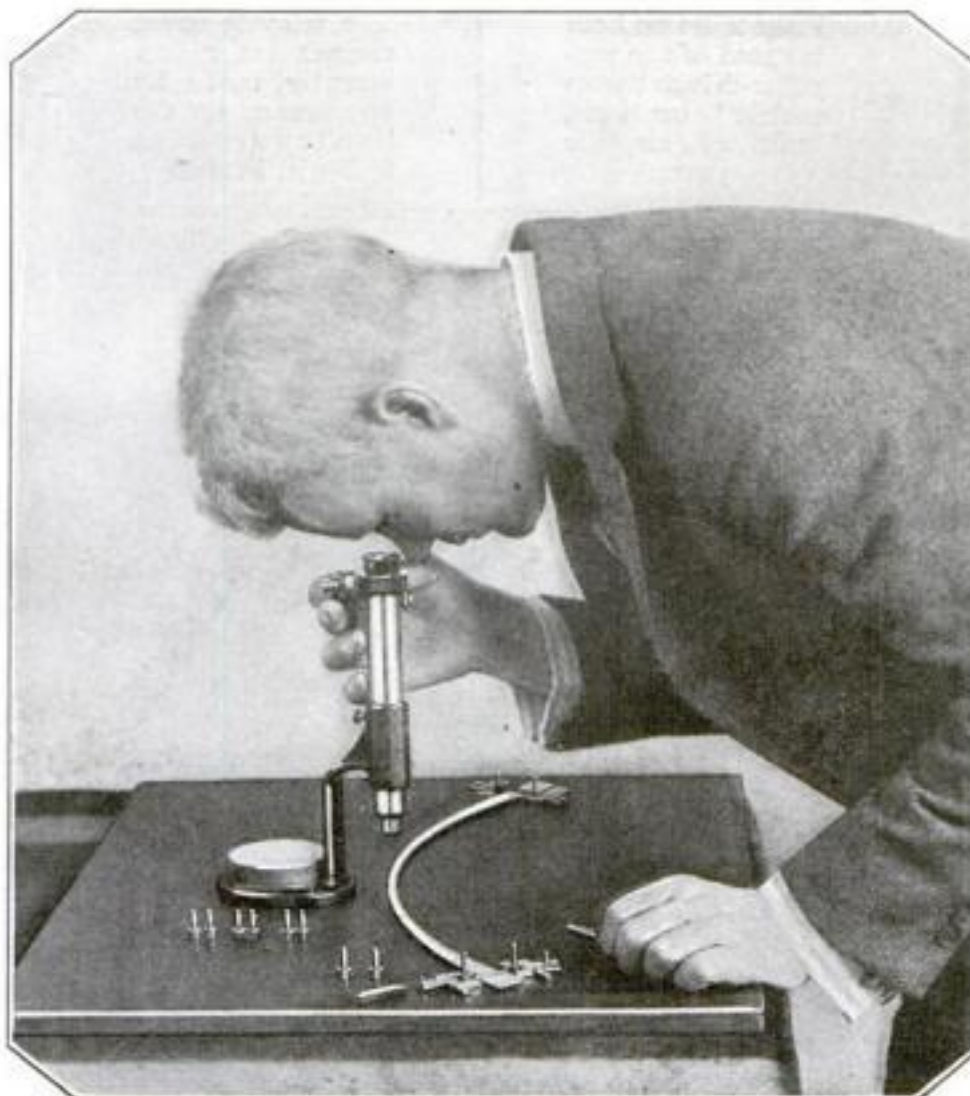

Above, Professor G. E. Beggs, inventor of the time saving system, measures with a microscope the movement of a point on the paper model as one end is stressed by the "deformeter gage"

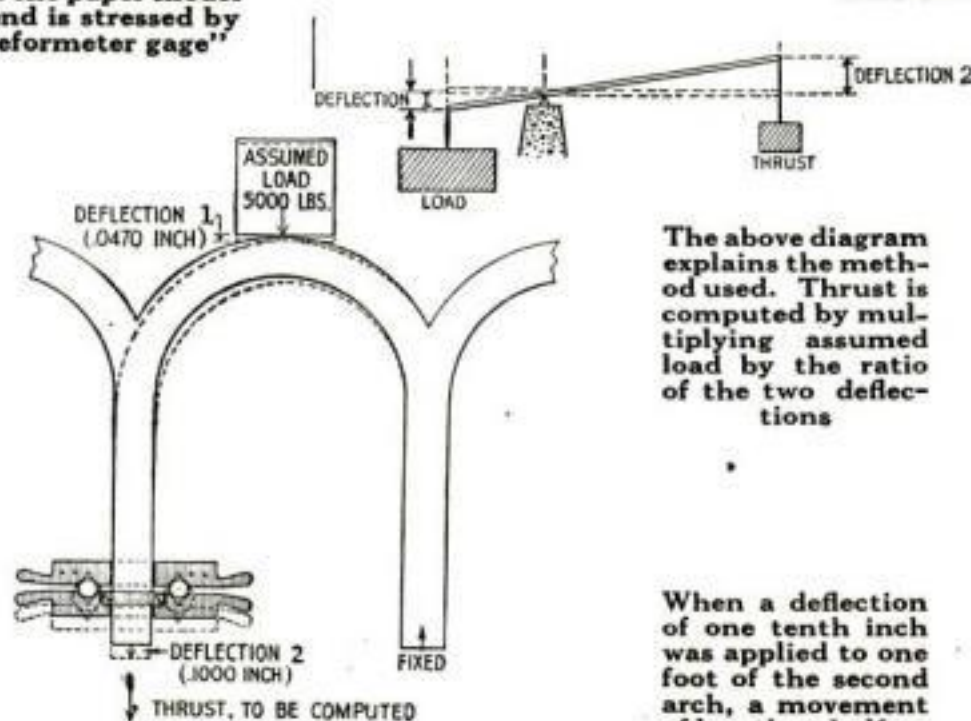

The test pictured below is explained in the diagram above

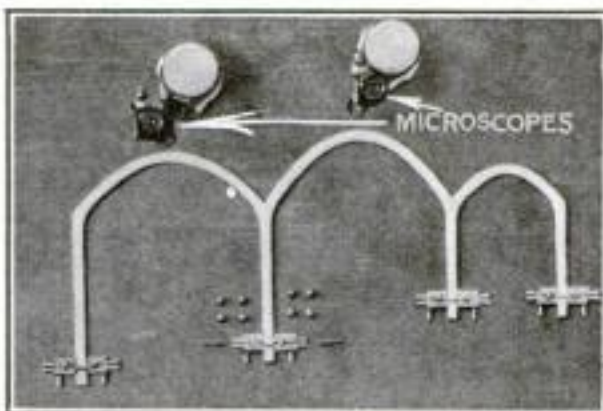

Professor Beggs' equipment consists of a paper model, a microscope, and necessary deformeter gages

these gages. Two sets, consisting of short rods arranged in pairs of two different sizes, are for measurement of thrust, which is the force with which the bottom end of a structure presses against the abutment or foundation. The third set is made up of two rods of different sizes and is used to measure the "moment," the term employed by engineers to describe the tendency of the structure to bend, due to a force applied somewhere along its length.

### Microscope Measurements

The final set of gage plugs is for shear stresses. If one end of the footing is held rigidly and a load applied to the structure, there is a tendency of the member to slide off horizontally. This is called "shear." The shear gages are rectangular rods that fit into the V groove in the bars.

After this deformeter gage is in place, the micrometer microscope is set up over the point on which the load is to be applied. The field of the microscope is turned so that the cross lines on the field agree with the direction of the loading.

Then, to measure the thrust, the normal plugs that are kept in the gage during the setting up process are removed and the set of large plugs substituted. The point on which the microscope was originally trained is found to have moved. The new point is noted. Then the plugs are removed and the smaller set is substituted. Further examination reveals another movement of the load point. Since the microscope used by Professor Beggs reads to 1/16,000 of an inch, these movements can be read accurately.

The computations that follow are simple. The dimensions of the plug gages are selected so that the movement caused by their insertion is of a known amount. Combining this figure with that obtained from the microscope reading, the result is a ratio determining the pressure on the foot of the arch, caused by one pound of load applied at the top.

The total pressure at the footing of the arch is then computed by multiplying this ratio by the total load that the arch should be designed to withstand.



# A Page of Novel Photographs from the News of the Month




## An Aeromobile

Fifty miles an hour is speed of the propeller-driven "aeromobile" (at left), built of airplane parts

## Paris Road Brush

The tricycle street cleaner (at right), recently made its appearance on the boulevards of Paris, France

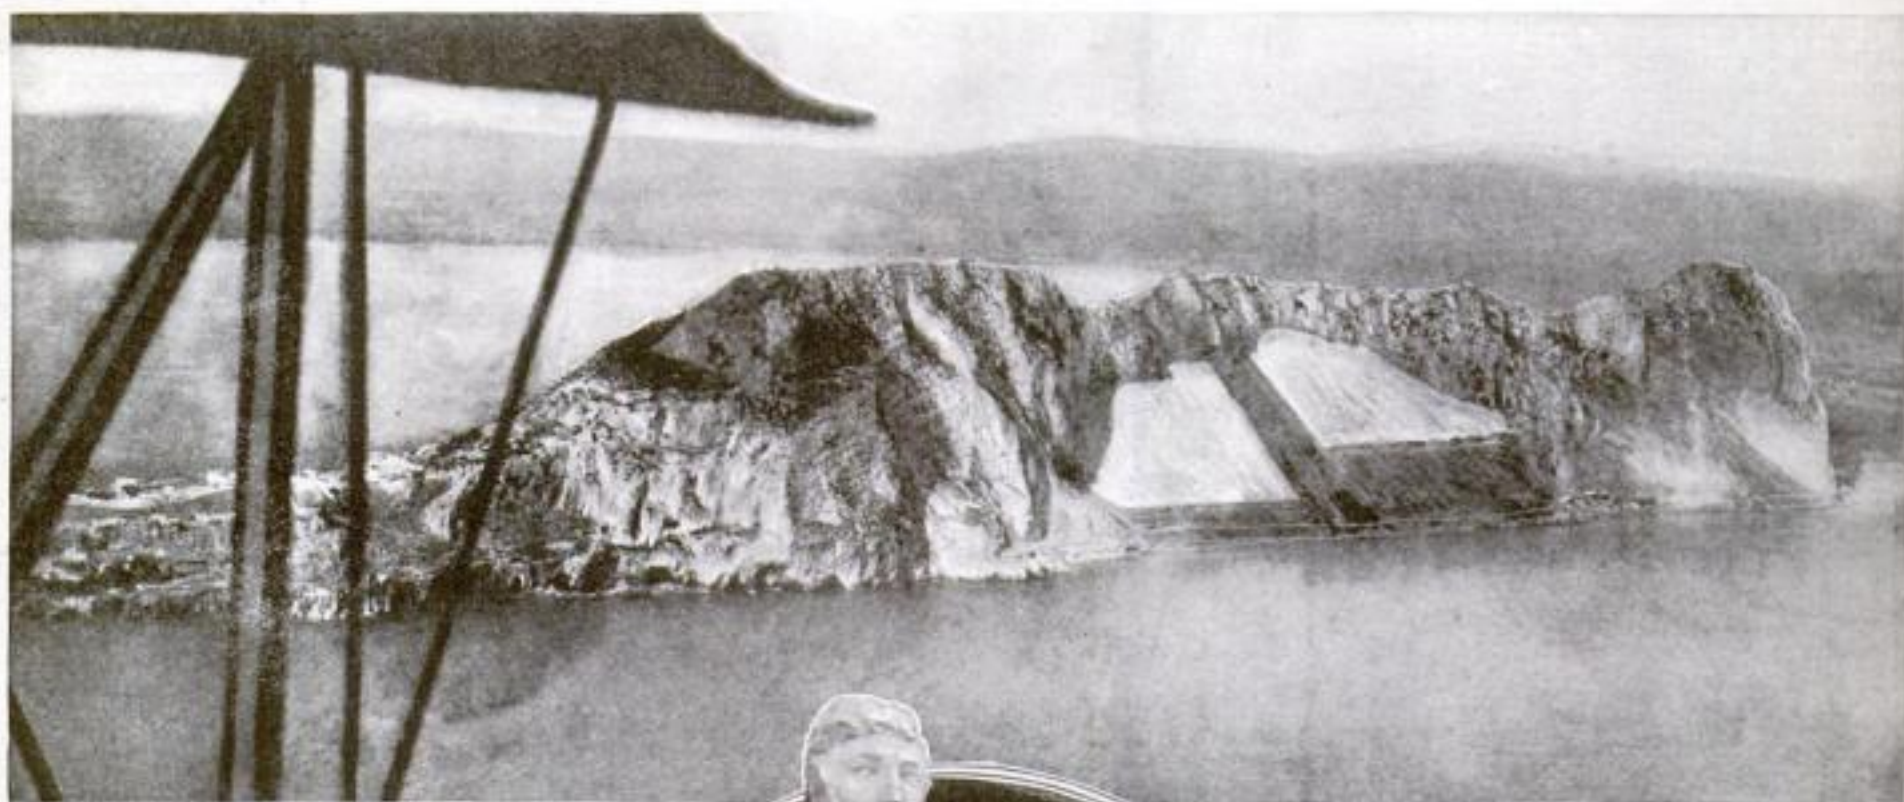

## "Gib's" Rain Catchers

Sheets of iron, laid over the sloping sides of the Rock of Gibraltar in the Mediterranean, like a tin roof on a house, act as "rain catchers" to provide water supply for the great rock. The rain drains into gutters at the bottom and from there is pumped into reservoirs

© M. Flandrin

## Just like Tin Roof

Lack of water has been one of the chief drawbacks of Gibraltar. Because of the porous nature of the rock there are no springs. For the same reason, iron sheets were necessary to prevent the rain from filtering through the rock as it poured down the hillside




This Colorado naturalist displays two cherished possessions—a porcupine's skin and old overalls with wasp nest "built in"



Courtesy Edison Monthly

## Power Tool Aids Sculptor

Compressed air tools are replacing the hand mallet and chisel. The tool shown above derives its power from a small gasoline engine and air compressor in the studio. Not only greater speed, but finer work is possible with the power tool, it is said

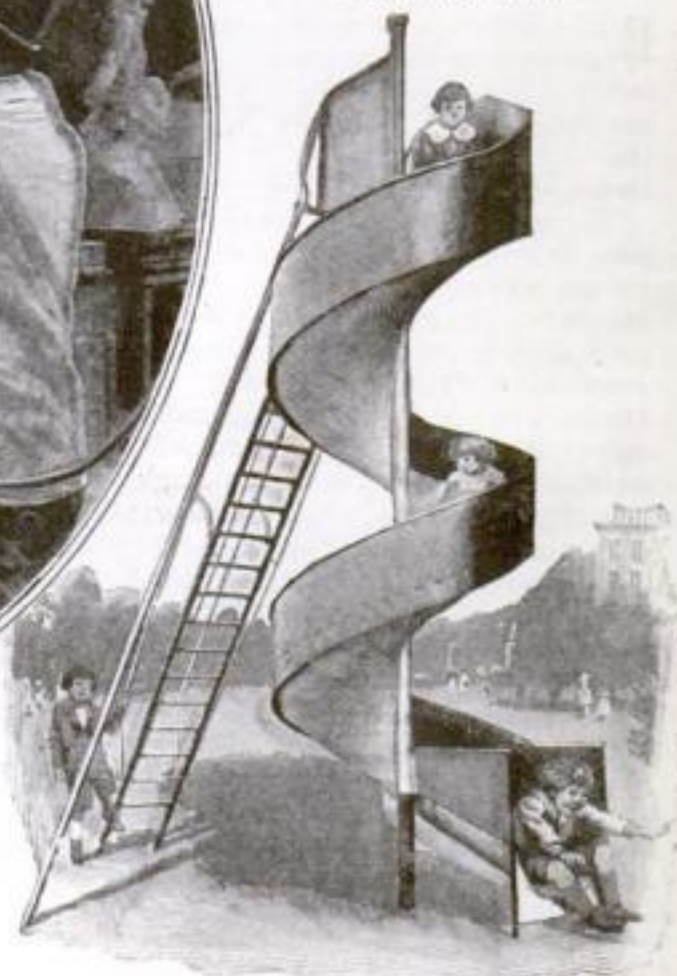

This all-steel spiral slide, with two complete turns, and a sliding distance of 35 feet, is proving popular




# Steel Patches Mend Rusted Pipe Line

**P**ATCHES of steel plate, applied like plasters to weak spots and securely welded in place, recently effected repairs to a 3000-foot water pipe line in Honduras, South America, saving the cost of rebuilding the entire line.

This 22-inch pipe line, which supplies the Guadalupe plant of the Honduras Rosario Silver Mining Company, had been in service for many years. During that time most of it had lain on top of the ground, and was badly corroded. Examining the sections previous to the start of the work, the engineers discovered places where the sheet steel had been rusted to the thinness of ordinary paper.

The line was constructed of one hundred 30-foot sections riveted together in 90-foot lengths, equipped at the ends with connecting flanges. Removal of the corroded sections was not advisable because of the

Below: Welding a steel patch on a section of pipe under a protective awning

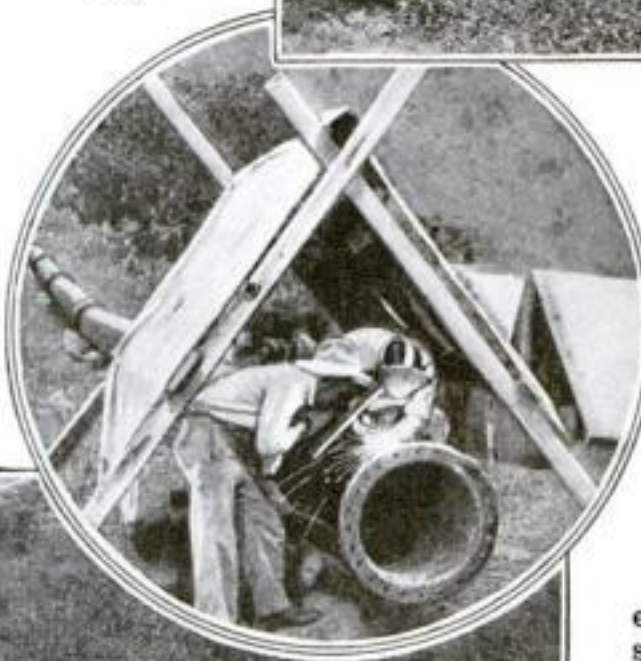

Above: A section of corroded pipe, showing numerous steel patches welded over weak spots by the portable welding machine shown at right

weakness of the riveted joints, while the rugged nature of the country made transportation of new pipes for replacement an extremely expensive undertaking. It was finally decided to make repairs by the use of portable electrical arc welding outfits manned by native workmen.

## Patching Saves Expense

First, the pipe line was disconnected at every third joint, so as to leave 90-foot sections of continuous pipe in each piece. These sections could be easily turned around on the tiers on which they were originally stalled. Engineers examined every inch of the pipe and marked the weak spots. Then at each weak spot a piece of steel plate of the proper size was formed to cover the marked area. Around the edge of this plate the welders deposited a fillet of metal, producing a tight, tough joint.

After the work was completed, the pipe line was tested with double pressure. Only a few leaks appeared, and these were promptly closed with blows of a calking hammer. It is estimated that the repairs were made at one tenth the cost of replacing the entire line.



How the portable arc welding equipment, weighing 1500 pounds, was hauled over the mountainous country of Honduras, South America, to repair the pipe line

# Talking Machine Phones Height of Water in Reservoir

**B**Y COMBINING the telephone and phonograph, an English firm has perfected a novel device that automatically announces in either words or code signals the height of water in a distant pond or reservoir.

The recorder can be "run up" or switched into any existing telephone or telegraph circuit when information about the height of water is sought. As installed, the new device consists of a phonograph mechanism with a phone transmitter substituted for the sound box. An electric motor drives the record table, and a relay, acting through levers, stops and starts the machine and lifts the needle from the record.

## Float Controls Recording Needle


The recording disk contains 200 concentric grooves, each groove a vocal record of a certain height of the water. By the movement of a float that rests on the water, the tone arm, sound box, and recording needle are moved laterally into position with the disk in such a way as to give the correct reading when the needle is brought into contact with the disk.

To effect this contact, the sound box, with needle, is automatically lowered when the disk mechanism is in rotation, and raised again above the disk when the mechanism stops.



How the talking instrument, with telephone transmitter substituted for sound box, is installed at the reservoir

The instrument is connected in the usual way with the nearest telephone exchange, and is given a regular subscriber's number. When the inquirer seeks information about the height of the water, he asks Central for

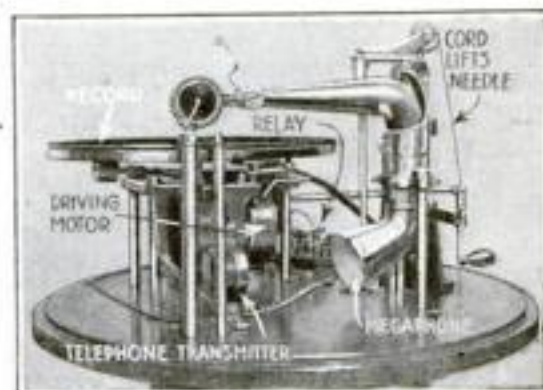

In response to a phone call, this mechanism automatically starts a phonograph record that telephones the water level

this number. As soon as the instrument phone rings, the needle immediately drops to the record, which makes three revolutions, and a voice announces over the telephone line the exact height of the water. The short "speeches" on the record range from "empty" to "one, double nought," enunciating each digit of a figure, such as "seven two" and "seven two half." The mere ringing of the phone sets the mechanism in operation, delivers the spoken information, and closes the recorder.

In the code signal type of mechanism the grooves on the record contain various combinations of dots to represent the changing height of the water.



# Office Safes Survive Terrific Roasting in Test Oven

*Novel Theater Audience Sees Undamaged Papers Removed from Improved Steel Cabinets After Dramatic Ordeal of Fire*

**F**IVE hundred salesmen, their eyes focused on one point, gaze with eager interest and suppressed excitement as a white hot steel safe, weighing half a ton, is drawn from a roaring inferno of fire and quickly swung three stories in the air. They hold their breaths during the short interval in which the crane man gathers his strength for a powerful jerk at the release rope. Dropping like a fiery meteor with a trail of scintillating sparks, the safe turns over slightly in its flight and crashes, corner first, on a pile of broken bricks. Two laborers rush in with a streaming hose and play it on the mass of hot steel, enveloping it in a haze of hissing vapor.

## Heat and Fall Leave Safe Intact

Soon the clouds of steam thin and operators equipped with asbestos gloves approach the safe and open the door. The theoretical conflagration is over and the safe, after subjection to a heat seldom attained in ordinary fires, combined with a fall such as might conceivably take place when floors collapse during the height of a devastating fire, is seen to be still intact, with its contents of inflammable paper showing no signs of the fire it has been through.

Such is the spectacular demonstration staged periodically for visiting salesmen and executives by a progressive manufacturer of a fire resistive safe. So valuable have these tests become that a special laboratory has been built in Marietta, Ohio, where new models of safes are subjected to similar rigid experiments. Equipment has been added by purchase or by invention that will simulate every known condition that safes must withstand in actual conflagrations.

It was a Methodist minister who, some 15 years ago, conceived the



## Are Modern Office Buildings Really Fireproof?

**P**APERS containing records valued at more than \$5,000,000, locked in safes that were relied upon to be fire and burglar proof, were burned to cinders in a \$15,000,000 fire, illustrated above, that recently swept the upper stories of the Burlington office building in Chicago, also believed to be fireproof. This disaster—called at the time America's first serious skyscraper fire—instantly raised a question among engineers as to the safety of huge modern office buildings hitherto supposed to be completely fireproof.

Subjected to the terrific heat from blazing buildings 80 feet away, the wooden window sashes of the Burlington Building were first ignited, and their destruction opened the window spaces to the full effect of the fire. Even window panes with wired glass

melted and pulled away from the sashes.

Thus breaking into the building, the flames found ample food in the wooden desks, doors, and cabinets of the interior, while the wooden trim of the so-called fireproof partitions was the means by which they spread throughout the building.

The disaster indicates that no building is proof against the ravages of fire as long as its contents—furniture and trim—are inflammable. The fireproofing of vital records, therefore, becomes of importance, and the reason is seen for the seemingly elaborate tests administered by an American safe building company to its products. The spectacular tests are no more severe than conditions actually encountered in the Chicago catastrophe.

idea that a safe might be constructed that would be not only lighter in weight and greater in capacity than the old style iron safes then commonly in use, but also absolutely proof against destruction by fire. This man realized, as many others never have, that the contents of a building are not included when the term "fireproof" is applied to a structure. For while fabricating materials such as concrete and steel, with which a building is erected, may be proof against fire, the furnishings and equipment of buildings are usually of the most inflammable nature.

## Parson's Idea Is Successful

After wide research and experimentation the Methodist minister completed a safe that under test proved to be all that he hoped. But though convinced himself, he found that salesmen and prospective purchasers still retained a measure of doubt that those light weight safes could do all that he claimed. So the testing laboratory and the spectacular tests were called into existence.

Previously safes had been tested by placing them in wooden huts and igniting the huts, but such tests were not exact imitations of conditions encountered in real fires. Test conditions could never be duplicated; results varied with the wind, and there was no way of surrounding the safe with burning gases.

## Details of the Test

The most important apparatus at the present testing laboratory is a huge oven that can be heated to temperatures as high as 2000° F. by burners supplied with a special grade of high temperature gas delivered through a six-inch main. Air blowers supply the air for proper combustion of the gas.

After the safe to be tested is stuffed with books and loose papers in simulation of the customary office safe, several sensitive thermometers, called "thermocouples," are placed at selected locations inside the safe and outside in the oven. The safe is then locked, the oven door closed, and the burners are lighted.

At the end of five minutes the thermocouples register a temperature of 1100 degrees; five minutes more and the heat


## The Heart of the Test

During safe tests observers in a near-by room watch the sensitive thermometers and by signaling the oven operators with a system of colored lights, maintain the heat at a specified temperature

TIME ELAPSED

OUTSIDE TEMPERATURE

INSIDE TEMPERATURE

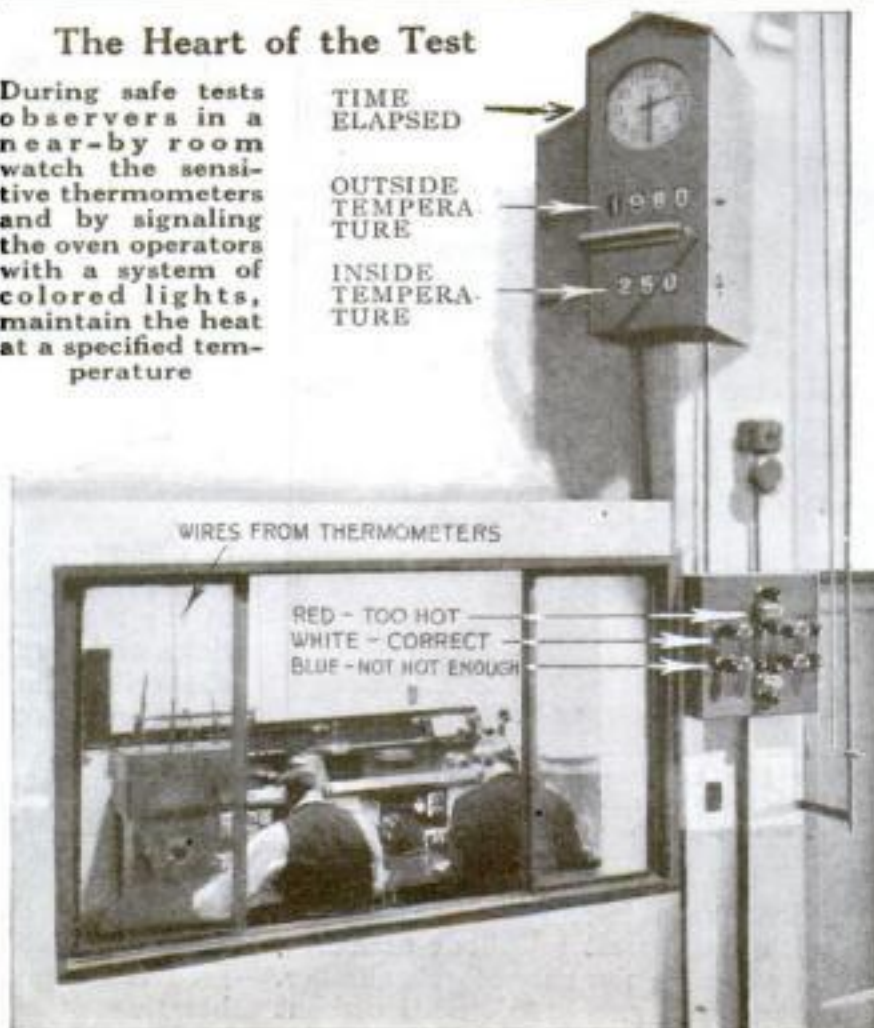





has increased to 1400 degrees; at the end of 30 minutes the heat within the oven stands at 1650 degrees; and finally, after two hours, a top temperature of 1950 degrees is recorded.

Through mica peepholes in the oven side, the safe appears as a mass of flaming red steel with burning gas enveloping it from top to bottom. In a near-by room observers watch the thermocouple readings and maintain the heat at the predetermined temperature by signaling the oven operators through a system of colored lights.

After the completion of the heat tests, the safe is withdrawn from the oven. A crane hooks it, then lifts it 40 feet in the air. It is released and dropped on a

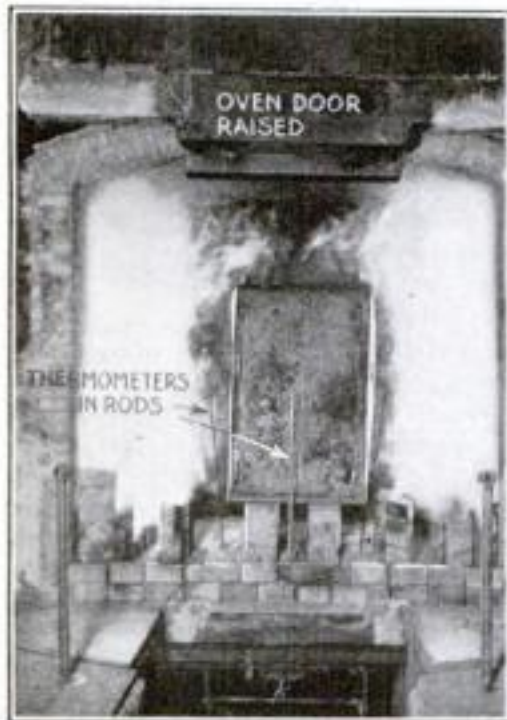

Rods containing thermometers are placed around the safe to indicate the oven heat

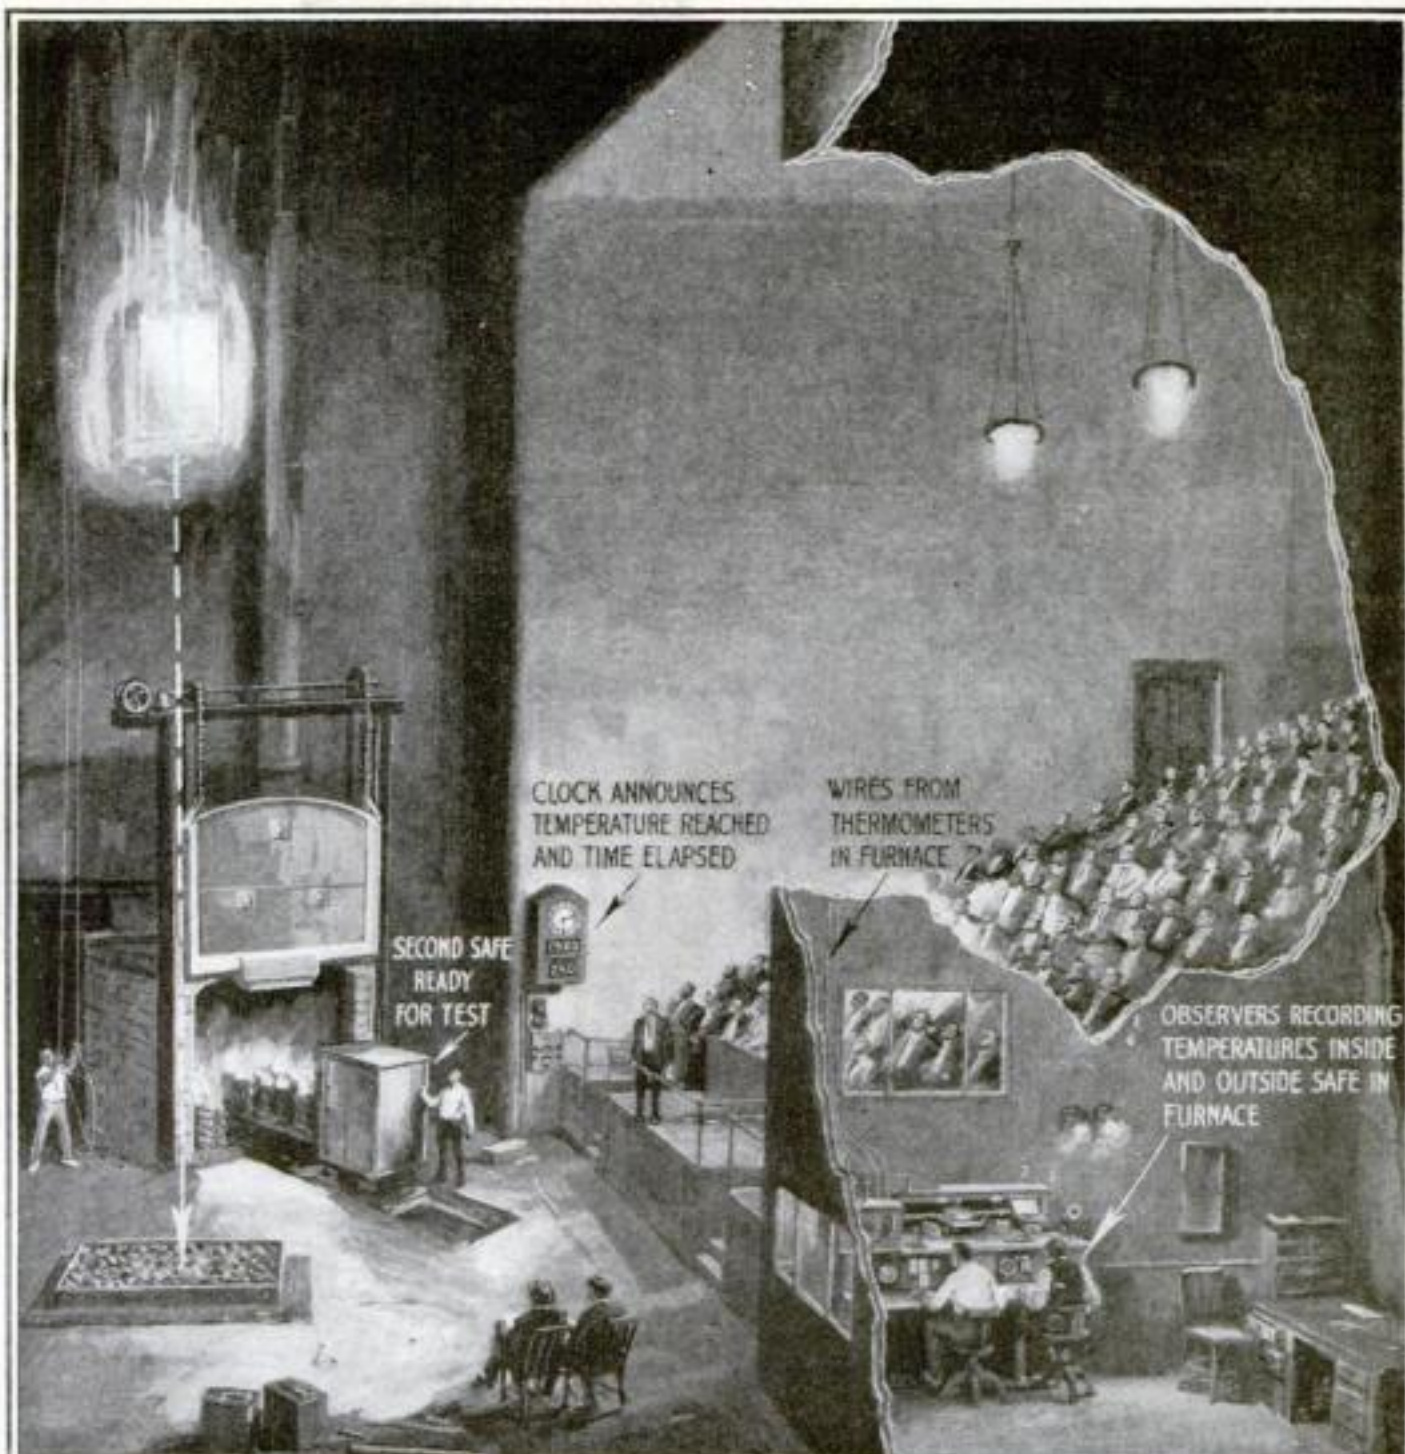

Before a gathering of salesmen and buyers, the white hot safe, hoisted to the ceiling, plunges 40 feet with a spectacular crash onto a bed of broken brick

pile of broken bricks. Following this crashing fall, the safe is returned to the oven for a second period under high temperatures. This reheating is supposed to imitate the roasting undergone by the safe after it has fallen through a collapsed floor into a mass of burning debris. After an hour the safe is again withdrawn from the oven and cooled by streams of water.

Not all the safes are tested in the presence of thrilled audiences. The staff at the laboratory is constantly at work on

routine tests, the results of which will tend to improve the quality of the product. Every 60 days a number of safes of all sizes are taken at random from stock and subjected to the most strenuous tests.

The rating is based on an arbitrary standard selected after an experiment conducted by M. L. Carr, director of the laboratory. Under his supervision, sheaves of printed paper were placed in an oven and slowly roasted. As the temperature increased, the condition of the paper was

noted through the glass front of the oven. At 500 degrees the paper had charred to a point where the writing and printing were illegible. Three hundred degrees was therefore selected as the limiting temperature that should be permitted in a safe.

Based on this standard, a safe that shows an inside temperature of 300 degrees after exposure for two hours to an oven temperature of 1950 degrees, is classed as a two-hour safe. A three-hour safe can stand off the 300 degrees inside heat for three hours.

## Unusual Flying Boat Has Hull and Wings of Duralumin

OUTSTANDING in its design because of its light weight, casehardened metal body and the elevated position of its engine, the flying boat designed by Herr Dornier, Zeppelin designer, represents the latest advance in combination water and air craft.

The specially prepared duralumin of which the hull of the boat is built, is processed to protect it against the corroding effects of salt water. The engine is located high in front of the pilot, out of the way of the salt water spray.

The top wing is unusually thick—in fact, it is a modification of the

popular cantilever wing form. It will be noted, however, that this heavy wing is rigidly supported by stout diagonal struts

from the lower wing surface. The lower wing acts like a huge fin, performing a double duty as a lifting surface, both in the water and in the air.

The cabin of the plane offers comfortable accommodations for eight passengers. The pilot's cockpit is in the nose of the machine.


The sturdy flying craft appears to be well adapted for cross country aerial transportation service, using lakes and rivers as landing fields.

IF YOU want to attract the birds, plant the right trees and shrubs. Red cedar, the native flowering dogwood, and Virginia creeper are best.



Eight passengers, four on each side of the cabin, can be carried in the Dornier craft. Note the position of the engine high in front, out of the way of the spray

The front view of the hydro-airplane, below, shows the lower fin in action, lifting the bow

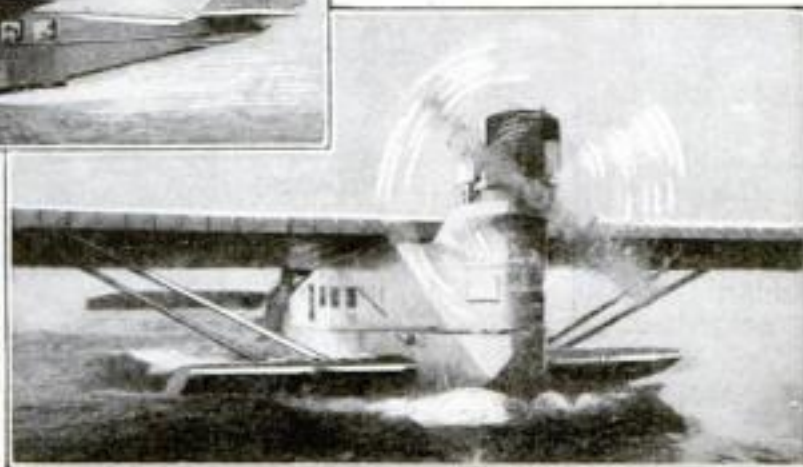




## Pipes Laid with Drills to Save Lawns

USING compressed-air driven drills and extension rods, a light and power company in Brooklyn, N. Y., has found it economical when installing electric light supply lines to bore holes from cellar to street rather than to dig trenches as is usually done. Distances up to 40 feet have been successfully covered by this method.

The cellar wall is first cut through with a chipping hammer. Then a drill, such as is used in coal mines, is inserted in the air hammer and the ground perforated for a distance of 10 feet, which is the limiting length of the drill. For longer distances extension rods are added to the drill. Compressed air is supplied by a gas-engine driven air compressor, mounted on a trailer and drawn by the truck accompanying the working crew.

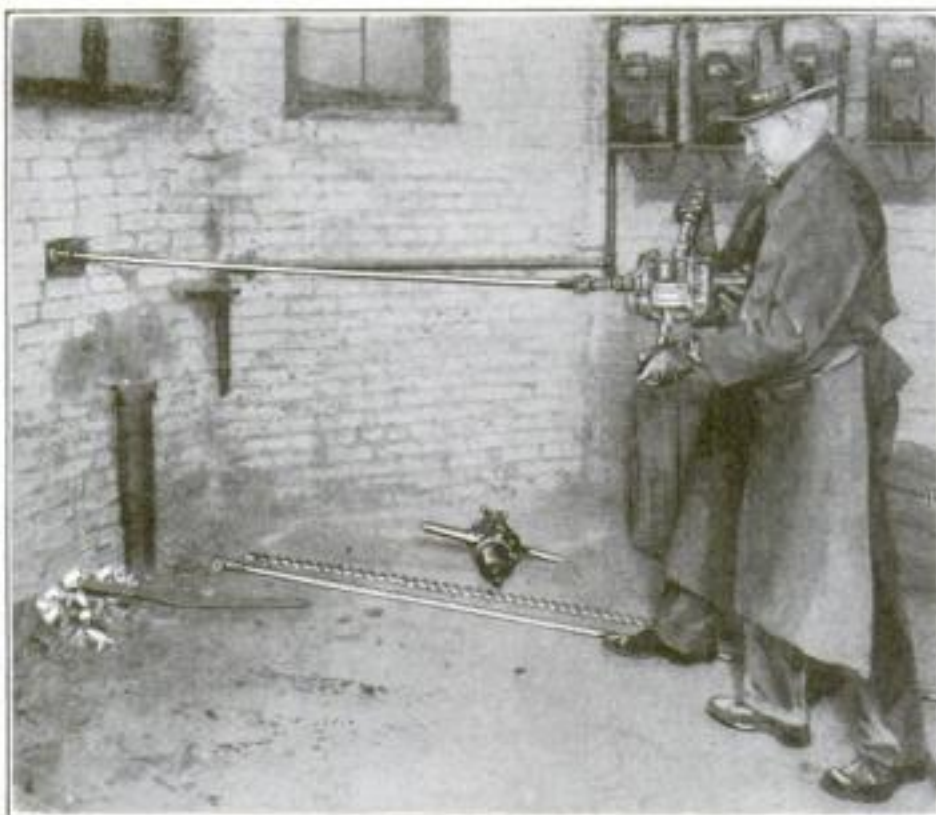

Inserted through a gap in the cellar wall, the compressed-air drill bores a tunnel for the pipes

Seventy-five per cent of the jobs can be handled in this way. The drills have been successful in pounding their way through all kinds of obstructions except round boulders. When these are encountered, a slight change in direction of the opening is usually effective in passing around the obstruction, enabling the drill to continue its work.

## Dry Cell Swings Pendulum of "Never Wind" Clock

"PUT out the clock, wind the cat, and come to bed" as a night-time admonition may soon be scrapped by the perfection of a clock that keeps step with the minutes month after month practically without attention. George S. Tiffany, of Summit, N. J., the inventor, calls it a "never wind" clock.

The principal parts of the timepiece are a small dry battery located in its base—renewed once a year—an electromagnet, and a torsional pendulum. The dry cell takes the place of springs or weight.

To start the clock, an initial impulse is given to the pendulum with the hand. The movement of the pendulum opens and closes the circuit of the electromagnet, supplying the pendulum with the impulses that

swing it forward and backward. With each of these movements the wheel of the clock is moved a distance of one tooth. Since the pendulum does no direct mechanical work, the friction is reduced to a minimum.

Except occasional regulation, the clock requires only a yearly renewal of battery.



A dry battery takes place of springs



## Six Shooter Is Combined with Flashlight

BY COMBINING a flashlight with a six shot revolver, S. P. Cottrell, of Buffalo, N. Y., has produced a weapon that is particularly valuable to night watchmen.

The barrel of the gun is fastened to the top of the flashlight tube, and the magazine holding the six cartridges is within the tube.

The gun is fired by a standard trigger protruding through the bottom side of the flashlight.

The light may be used either separately or in combination with the weapon in case of emergency.

## Vines Planted with Aid of Electric Drills

BY THE use of an electric power drill, a Californian grape grower has devised an ingenious method of planting his 200 acres in record time.

From a near-by power line, an insulated cable long enough to reach every part of the planting area was extended by permission of the power company. Four  $\frac{5}{8}$ -horsepower electric drills, each fitted with a three-inch auger, were then connected with the portable cable. One man was detailed to look after the cable and another to operate the drill. A third placed the grape cuttings in the



Attached to a portable wire from a power line, the drill bores holes for the grape plants

holes and tamped the earth around the roots. It was an instant's work to drill a hole 14 inches deep, ready for the plant.

Not only was time saved in planting, but the cost was much reduced.

## Pocket Radio Set Tips Off Stock Brokers

A MYSTERIOUS leakage of secret information from the stock exchange to curb brokers was recently traced by an officer of the San Francisco detective force to a member of the exchange who



carried a miniature radio transmitter strapped around his waist.

The batteries were carried like gun cartridges in a belt around the man's waist. Also around his waist were many turns of insulated copper wire used for the aerial.

Signals were sent by a muted buzzer operated by a miniature telegraph key concealed in a side pocket. Code signals could always be caught by a supersensitive receiving set in the near-by broker's office.



# Explorer Finds Strange Relics of Lost Race



These strange symbols, made up of several layers, extend along the face of the cliff for nearly half a mile



Another rock covered with mysterious symbols. Note arrow leading over ridge of rock to unexplored cave near by

**F**LAT boulders of volcanic lava, mysterious caves and secret mounds, covered with pictorial inscriptions that may have been the work of America's earliest inhabitants have been discovered in a deserted section of Owyhee County, Idaho, by an exploring party led by Robert Limbert, of Boise.

Few of the symbols have been recognized by native Indians as those of their ancestors, the notorious Shawnee tribe that roamed the Idaho plains before the white man came from the East; but most of the writings from their appearance and description seem to ethnologists to be the work of natives hundreds and perhaps thousands of years ago.

More than 30 acres of rocks in the sage-covered plain near the junction of Battle Creek and Deep Creek in southwest Idaho are covered with hieroglyphics.

Two distinct types of rock writings have been found.

One is the ideograph or sign type, similar to those discovered on the ancient rocks of China; the other is the pictograph type, used extensively by the early Indian tribes of America.

Most of the writing has been done on flat or sloping rocks, but in one place Mr. Limbert discovered an interesting variation. A lava cliff that formed the south wall of a grassy plain was covered for nearly half a mile with thousands of mysterious inscriptions. In many places the ideographs had been overwritten with pictographs.

The mysterious mounds that were found near by may contain relics of inestimable value. These mounds, 20 in number and all pointing north and south, are from three to four feet wide and from two to three feet high.

In the same vicinity are strange caves that have never been explored. On them



Robert Limbert, of Boise, who while exploring a wild section of Idaho, stumbled across the rock carvings that may be the key to the earliest American history

and around them are arrows pointing like an ancient "follow the arrow" game. Usually a series of arrows terminates at one of the mounds or cave openings.

Near one large rock covered with undeciphered inscriptions Mr. Limbert discovered a small pile of broken rocks with

openings through which a draft of air blew continually, suggesting a second opening at some other spot. On a cold day in winter the moisture in this steady blast of air condenses in feathery puffs like a steam jet. In some of the smaller of these rock piles a quantity of decayed grass matting was found, with several flint knives and scrapers lying near by. At other places remains of tribal campfires were found.

Some of the collections of pictographic symbols have been shown to Mr. John E. Rees, whose associations with the Indian tribes of that section have continued for half a century. One of them, as translated by Mr. Rees, designated the grave of a favorite chieftain and described at length those feats of valor that had caused him to be highly revered by his followers.

Are these symbolic records the work of a race of people who preceded the cliff dwellers, Mayas, Aztecs, and Incas of Peru? This interesting problem cannot be solved until the mounds are explored and the strange markings deciphered.


## Frail Canoe Supports Heavy Weight



The weight of seven men added to the ton load of heavy sand failed to buckle this canoe built of thin layers of veneer

**T**O DEMONSTRATE the strength of a new style canoe built of veneer, it was subjected recently to a weight of 3420 pounds. The sag was only three-

quarters inch. By making the veneer in long sheets, the canoes are molded without joints below the waterline, except at the ends.

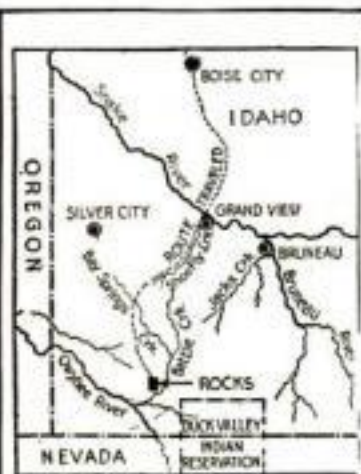


Route followed by the Limbert party and the spot near Battle Creek where the writings were discovered



# To This Child Musical Sounds Have Color!



Edgar Curtis, age 3½ years, picking out the "colors" he "sees" when different notes are struck on the piano

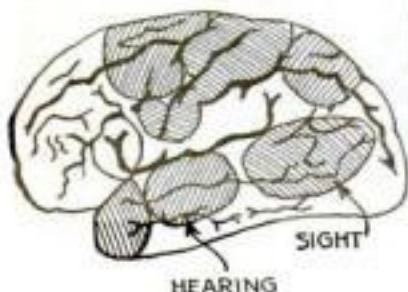

SIGHT  
HEARING

A SCOTCH woman with a broad "burr" in her speech was reading a story not long ago, to little Edgar Curtis, age three years and seven months, the son of Professor and Mrs. O. F. Curtis, of Cornell University. When the story was ended, the child said to his mother:

"Do you know what color it is when she reads? It's black."

A brilliant rainbow brought keen delight to the boy.


"A song, a song!" he exclaimed.

And so was revealed one of the most remarkable cases of "colored hearing" that

has come to the attention of scientific investigators.

Persons who see beautiful colors when they hear musical sounds are not so rare as is commonly supposed, but most of them suppress their extraordinary faculty, thinking it sometimes freakish. But Professor and Mrs. Curtis, instead of repressing their child when he described certain musical tones as white, yellow, red or blue, allowed him full freedom of expression in describing these sense impressions.

Some of the boy's impressions have recently been recorded by Miss Anna Kellman Whitechurch, of Cornell University.

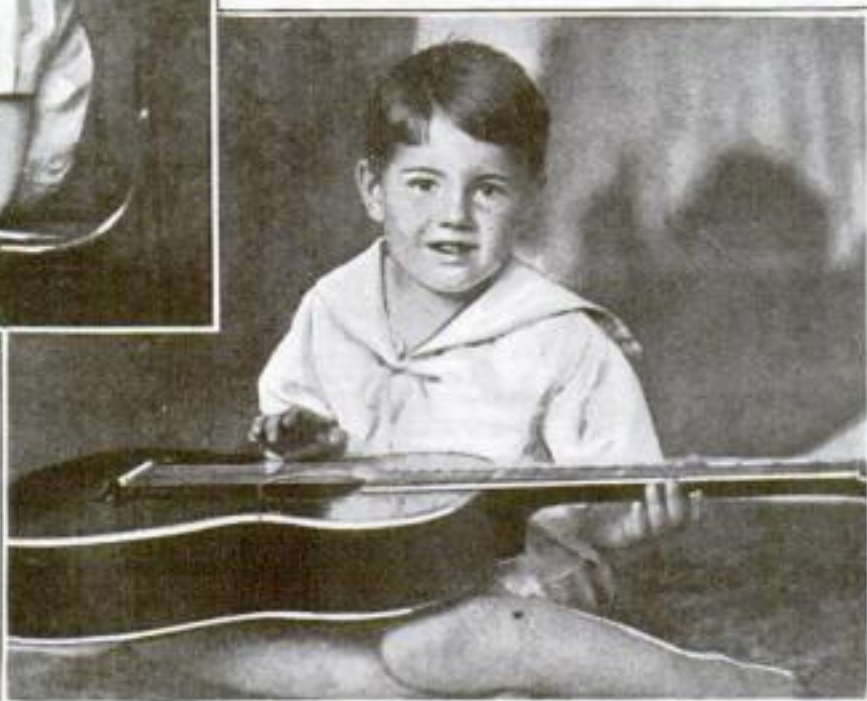

Edgar finds that C sharp on the guitar is "black," while on the piano it makes him feel "red." His color sensation thus changes with the timbre of the tone. Diagram at left shows how closely the centers of hearing and sight are associated in the brain

"Edgar often goes to the piano, and to amuse himself, touches the keys and tells the colors of the sounds," she writes. "Middle C he calls red, and the tones just below, red or red purple. The bass 'looks' black to him and the high tones white. Between middle C and the white tones he 'sees' reddish and bluish ones.

Edgar never of his own accord named tones yellow, green or gray; but during some later experiments when shown these colors he found tones for them all."



When disengaged, the hammer thrusts a hardened steel ball into the metal to be tested



## Small Spring Hammer Tests Hardness of Metal

MACHINE shops that cannot afford the expense of a Brinell hardness testing machine may utilize an apparatus, said to be of equal accuracy, invented by Richard Baumann, of Stuttgart, Germany, which consists of two telescoping tubes. As the rear tube is pushed forward, a steel hammer in the interior is submitted to the thrust of a spring, and at the given tension, which can be adjusted by the operator, the hammer is disengaged. Flying forward, it strikes an anvil and thrusts a hardened steel ball into the material to be tested.

The remainder of the test is the same as the Brinell process. The diameter of the imprint is gaged by a microscope, and the hardness and strength of the material are derived by a formula. The new tool can be used both on small and large pieces, and as it has two thrusting intensities, it may be used either on soft metal or steel. The friction of the moving hammer is negligible, since it moves on a very thin spindle.

The tool is so light and small that it can be used as a traveling outfit, or even be employed to test each piece individually without removing it from the lathe.

## Engine Winds Circus Tent on Spool

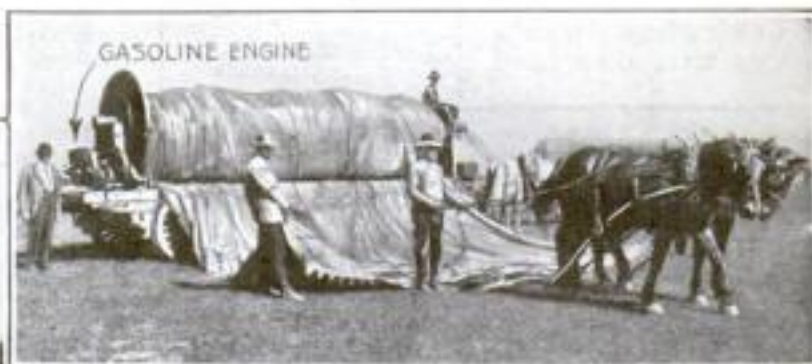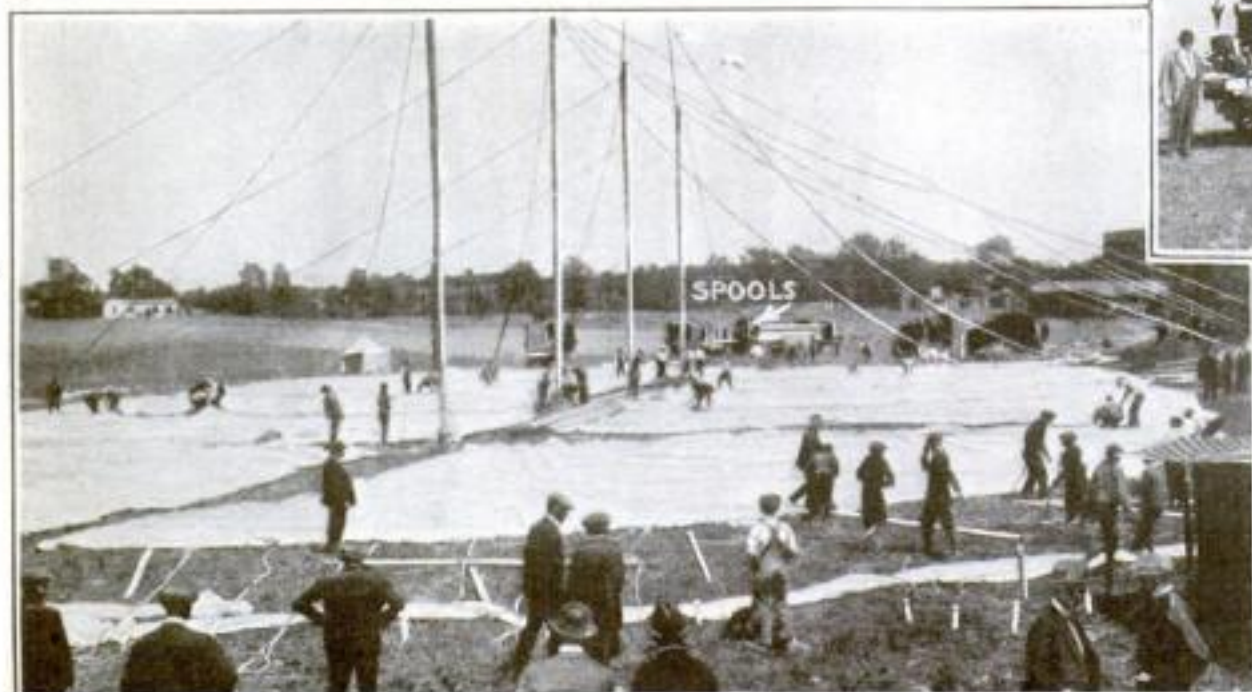

When the show is over, thousands of yards of canvas are wound on huge motor-driven spools. Inset shows a team of horses unwinding a big circus tent from one of the spools mounted on a large truck

HUGE, motor driven spools, on which circus tents are wound after the show is over, are among the most recent of the time saving devices by which circus managements have developed amazing speed in settling and "pulling up stakes" during one-day stands.

When the circus has completed its exhibition and before the last patron has left the grounds, the spool, mounted on a special wagon is backed up to the big tent, and one end of the canvas attached to the spool. The motor is started and the canvas slowly wound around the drum.

At the next stopping place a team hooked to the canvas quickly unwinds the tent.



# Working Single Handed under Water, Diver Mends Ship's Bottom by Use of Pattern Patch

*Remarkable Repair Job Completed in a Week without Drydock*

**S**EVEN days after a submerged anchor had ripped a jagged hole in the bottom plates of the Japanese steamer *Tamon Maru VIII* as she was leaving the harbor of Newcastle, Australia, recently with a full cargo of phosphates, ingenious ship mechanics and intrepid divers, working continuously, had built a coffer dam around the break and applied a four-foot patch that failed to show a trace of leakage.


The feat was exceptionally remarkable for the fact that, since Newcastle has no drydock, it was necessary to survey the damage, make an exact pattern for the patch, and complete the repairs under water, while the big vessel floated beside her dock. The *Tamon Maru VIII* is 327 feet long, with a beam of 41 feet, and gross tonnage of 2977 tons.

All that had saved the vessel from sinking was her double bottom, as the collision ripped a jagged hole in the outer shell. Before the work of patching the hole could be undertaken by a diver on the outside and by men working between the false and the outer bottoms, it was necessary to clear the space of water and close the hole temporarily.


The damaged portion of

holes through the undamaged sections to receive studs for fastening the patch, and finally tapped and fitted seven-eighth-inch studs, about four inches apart.


When all the studs were in place, the manholes were closed and a diver, descend-

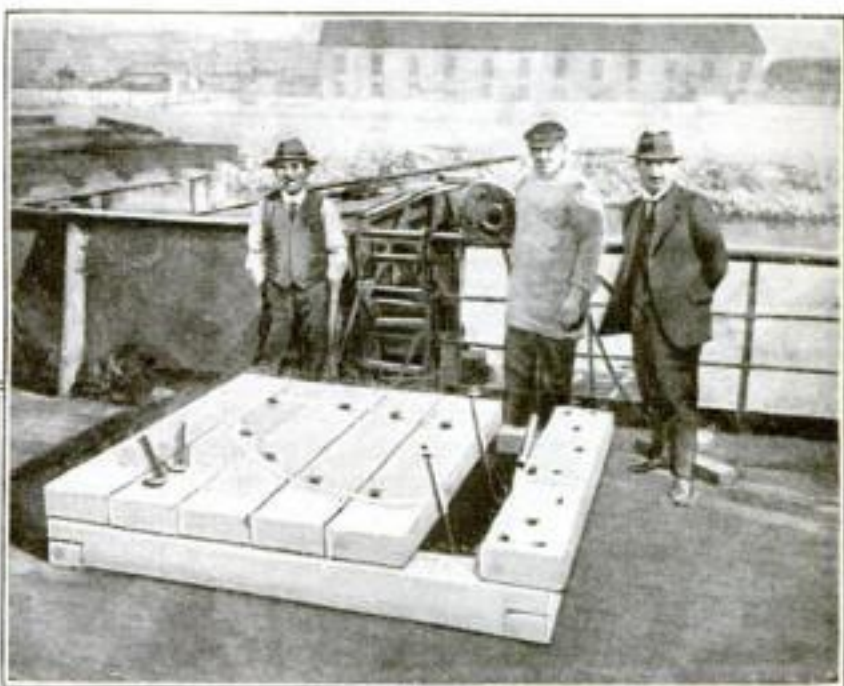

To permit repair work within the vessel's flooded ballast tank, a coffer dam of heavy timbers, shown above, was bolted by a diver to the bottom of the hull over the hole. The tank was then pumped dry

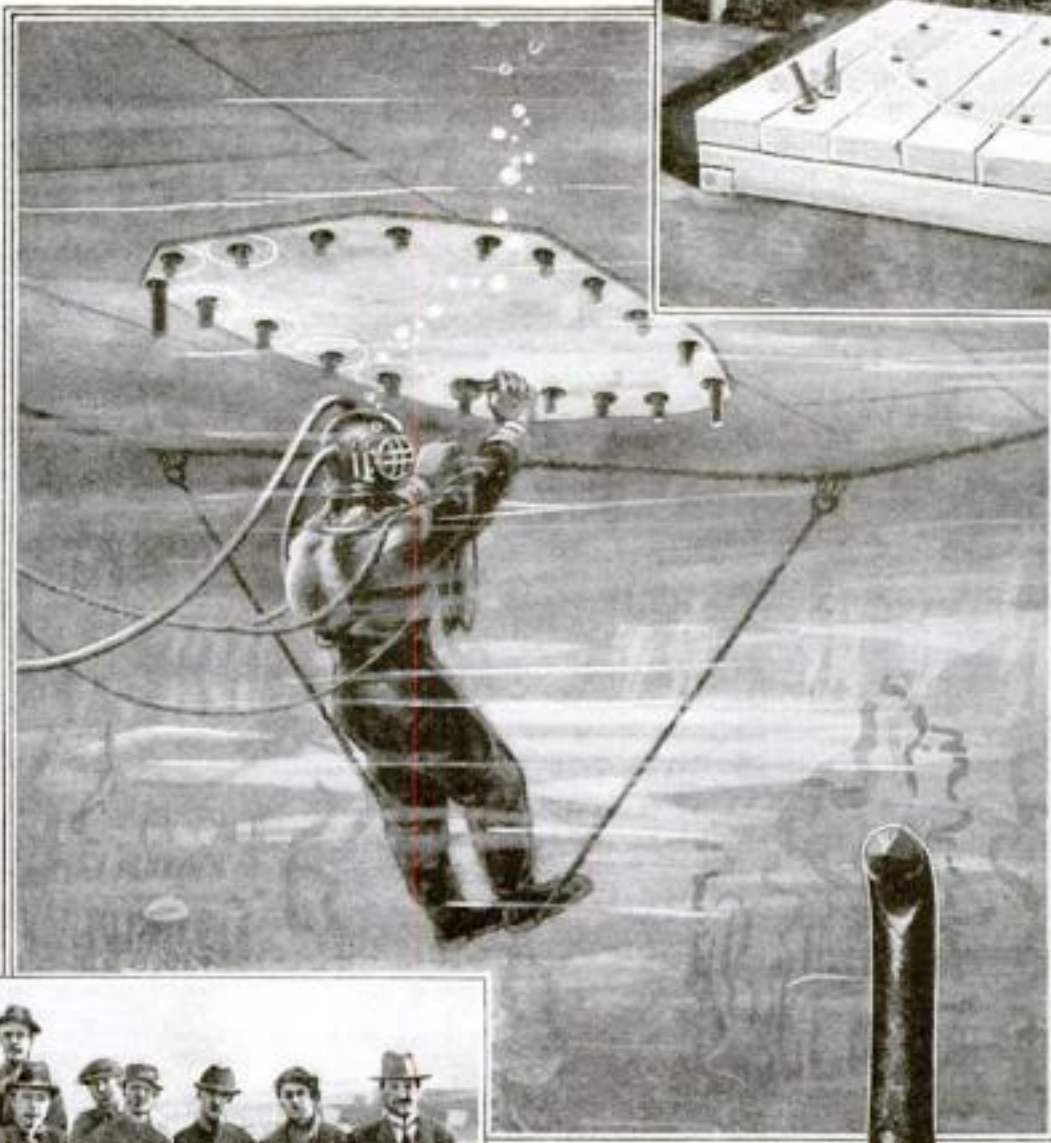

Using a special clearance nut (at right) as a compass, the diver described circles on the template around the studs, to determine the exact center of each hole to be drilled in the patch

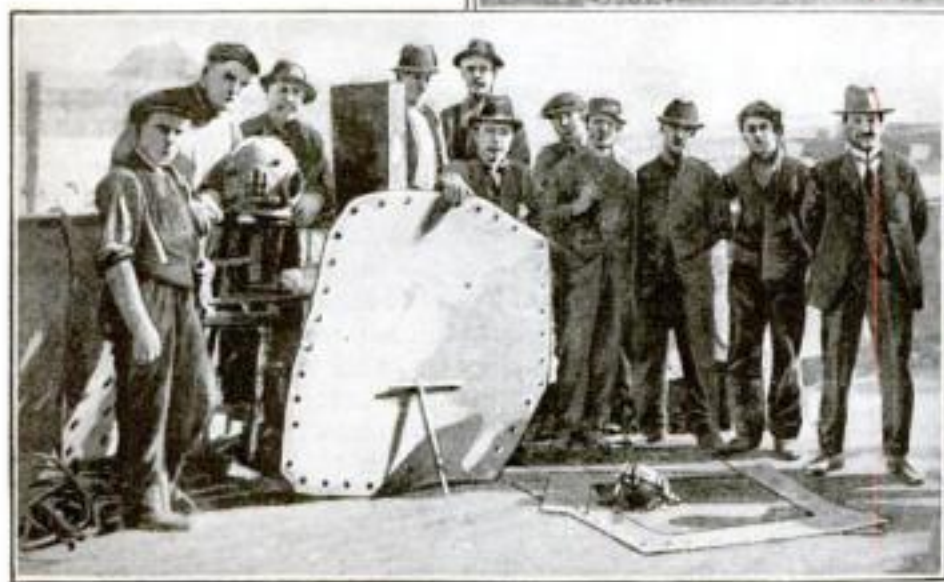

The patch plate, with holes drilled on centers determined by the diver's template, ready to be fastened on studs tapped through the ship's bottom

the hull, about four feet six inches on a side, was first surrounded with a coffer dam, about six feet square, built of heavy timbers. By means of hook bolts, this dam was fastened to the hull by a diver. The space between false and outer bottoms was then pumped dry and an emergency entrance was cut from the tunnel through which the propeller shaft passes.

All was now ready for the actual work of preparing the patch. In cramped quarters between the floor of the hold and the outer plates, workmen removed the damaged portion of the plates, then drilled

ing again below the ship's bottom, removed the coffer dam from the outside and prepared to measure the patch.

It was essential that the holes to be drilled around the edges of the patch should fit exactly over the studs protruding from the bottom of the hull. To this end, a template was prepared from rough measurements, with holes drilled sufficiently large to prevent any trouble for the diver in slipping the template over the studs.


Having placed the template in position over the hole, the diver, with the aid of a special, compass-like clearance nut, de-

scribed a circle on the template around each stud, from which the exact center of each hole on the final patch was later determined.

So successful was this method that although the holes in the patch plate were drilled to a tight fit, the patch slipped over the pilot studs and the 34 remaining studs without a hitch. The diver tightened all the studs to the limit.

Then, as water was pumped from the ballast tank, water pressure from below the hull forced the plate closer to the ship's bottom, while the diver took up slack.

To complete the work the plate on the inside was covered with a four-inch layer of cement, producing a patch so strong that the *Tamon Maru VIII* was given a bill of clearance from the port officials permitting it to proceed to any part of the world.

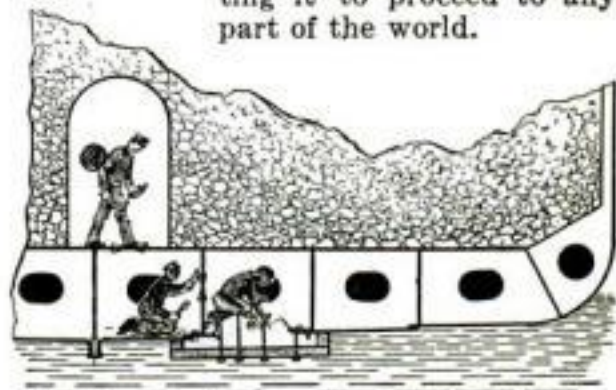

Cross section of ship's stern, showing ballast tank where workmen made repairs, and protecting coffer dam



# Radical New Shoe with "Automatic Fit" Promises Us Relief from Common Foot Troubles

## Manufacturer's Scientific Shoes Based on Natural Foot Shape

By Robert E. Martin

**T**HE neglected cause of a multitude of human ills—badly fitting shoes, which statistics show are worn by from 70 to 90 per cent of our male population, and which, science has lately proved, produce serious bodily disorders and actually gravely impair many a man's earning power—may be remedied by a radical change in shoe design now being developed in Rochester, N. Y.

After more than half a century in which machine-made shoes have been the standard American footwear, designed rather for appearance and economy than health and comfort, Oliver E. De Ridder, vice president of a great shoe manufacturing plant, has invented a new style of last that ingeniously adapts the inner sole of the shoe to the delicate contour and structure of the human foot. Mr. De Ridder made thousands of molds and measurements of feet during seven years of research work, before the new, specially shaped lasts were perfected.

### What's Wrong with Modern Shoes?

That modern shoes, manufactured in quantity, and so designed as to crush the wearer's delicately curved sole against a flat surface, are really the fundamental cause of innumerable foot troubles, was the theory from which Mr. De Ridder started.

"All modern shoemaking machinery," he says, "is standardized and designed to the use of a last which is flat-soled. It does not attempt to fit lateral arches, and its heel tread is flat, or nearly flat. It is designed to produce inner soles that are practically flat. The channeling and welting ma-

### A Rebel Shoemaker's Message for You

**"T**HE modern shoe carries its own condemnation with it—in the shape of no less than 126 devices now on the market for remedying the defects that it has caused in the human foot. Flat foot and the hundreds of other troubles that affect wearers of the ordinary shoe are caused by the struggle of the foot to accustom itself to a hard, flat sole that does not allow the joints of the foot free play."

This verdict of Oliver E. De Ridder, inventor of a revolutionary method of molding shoes to fit the natural curves of the human foot, comes with the authority of an expert who has examined and measured the feet of thousands of men and women, who has studied the history of shoemaking from its beginning, and who is known as "the Edison of the shoe industry."

"I have no doubt," says Mr. De Ridder, basing his conclusions on the results of these studies, "that if we were to cramp our hands in the same way that our feet have been cramped for generations, they, too, would develop bunions and broken down muscles."

Thirty-five years ago, when De Ridder began as an apprentice in one of the largest shoe factories in Rochester, N. Y., he evidenced a bump of curiosity and a genius for hard work that soon resulted in the development of many important new features in footwear. From the start, although shoemaking machinery had been standardized to the use of a flat soled last, he challenged the correctness of this standard. His studies and his innovations eventually placed him in a position of authority, and today he is vice president



Oliver E. De Ridder

and general manager of the factory in which he learned his trade.

To avoid now some of the serious foot troubles that Mr. De Ridder hopes his new system of manufacture will ultimately correct, experts say that you should insist more strenuously than most people do on correctly fitting shoes; that you must avoid especially shoes that are too short; that you must not lace your shoes too tightly; and that you should give your feet variety, changing frequently from one pair of shoes to another, and to comfortable slippers at home.

### Fitting Shoeleather to the Normal Foot




**Above:** How contours of thousands of feet were measured in perfecting the revolutionary new shoe lasts. The small circles mark the three main weight-bearing points of the foot, while the lines trace four important lateral and longitudinal arches whose delicate structure is abused by badly fitting shoes



To establish correct contours, plaster casts were thus made of hundreds of normal human soles

**Below:** Three molded depressions in the inner sole of the De Ridder shoe receive naturally the three weight bearing points of the foot—the heel, "outer ball" and "inner ball"

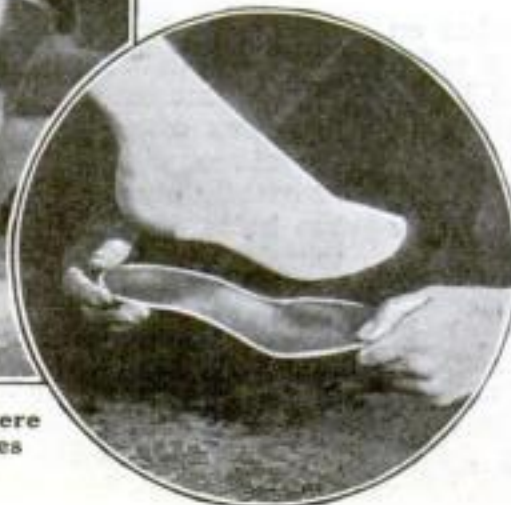


chines are, every one of them, operated on flat-tread inner soles.

"The result of this method of compressing a beautifully curved foot against a flat surface is as senseless as the custom of binding a flat board to an Indian baby's head," says the inventor. "It has no justification from the standpoint of the anatomy of the human foot, which has three weight-bearing points, and four important lateral and longitudinal arches. Open and close your hand, and you will see the joints move from one position to another. There is a similar motion of the joints of the feet in walking. Indeed, the most beautiful mechanical devices and engineering structures are found in the foot, yet with the flat-bottom last now used we force these joints down upon a flat surface and depress the arches. The flat-bottom last is an anachronism, probably responsible for 90 per cent of the troubles which wearers of modern shoes experience."

The extent of these troubles is made apparent by the army's wartime experience. When the draft took able-bodied men of all classes to army training camps, an official inspection revealed that as many as 231 men of every thousand from the northwestern states and California were afflicted with



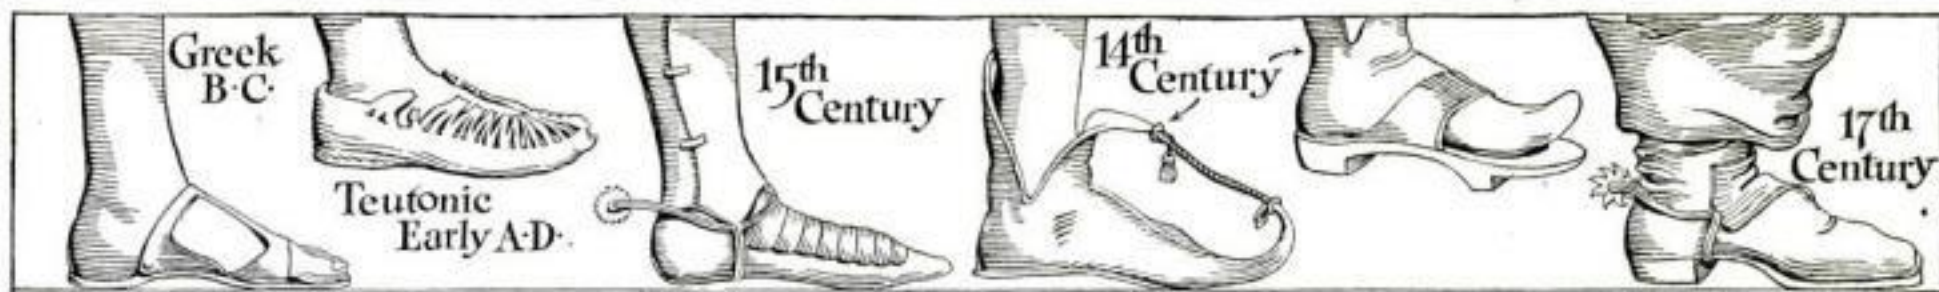

### Shoe Evolution—Queer Types of Other Days

None of the quaint shoes shown above, beginning with the light sandal of the ancient Greeks, was so injurious to the foot as some tight modern shoes, when incorrectly fitted. According to Mr. De Ridder, the evolution of the shoe has resulted, not in progress, but in a standardized product less hygienic than what our ancestors wore.

flat foot, while among men from the rest of the country outside of the South the ratio ranged from 80 to 144 in every thousand. On the other hand, among men from seven Southern states, the ratio was only from 41 to 79 a thousand. The astonishing comparative freedom from foot defects of Southern army recruits was attributed by medical experts to the more common practice in Southern rural regions of going barefoot during early years of life—apparently strong testimony to the evil effects of modern shoes.

The draft figures further revealed that from 70 to 94 per cent of all enlisted men wore shoes that were from one half to  $3\frac{1}{2}$  sizes too short! In fact, next to the stomach, physicians declare that the feet are the most abused part of the human anatomy, and the foregoing figures show that men are as guilty as women in this disregard of sensible hygiene.

Recent recognition of the serious consequences to general health from foot troubles has resulted in a national campaign for better-fitting shoes, launched in Chi-

The mold in the tread of this new shoe may be compared with the impression left by your bare foot in the pliable, moist sand at the seashore. The inner sole is molded by steel dies, under high pressure, to these contours of the foot, and the shoe is built on a last thus molded.

The great advantage claimed for shoes built upon the new dies and lasts is that the depressions in the sole that receive the weight-bearing points of the foot, the inner and outer ball on



### The Old Way and the New in Shoemaking

Above, at right: A typical flat-soled last. Contrast its shape with the natural foot, shown at right. Below, the De Ridder last, dotted lines indicating how its bulges correspond to the weight bearing points of the foot.



cago, Ill., by medical authorities, who assert that badly fitting shoes must ultimately succumb to the same fate as tight corsets.

Now the claim is advanced on behalf of the new shoe design invented by Mr. De Ridder that a bad fit will be impossible, since the inner sole in this shoe bears certain pronounced indentations that fit precisely the weight-bearing surfaces of the soles of the normal human foot, as determined after seven years of research in the making of an uncounted number of molds and measurements.

either side of the metatarsal arch and the heel, hold the foot naturally and overcome the tendency to slip backward, forward, and sideways. This tendency is ordinarily resisted by binding the foot down against a flat inner sole, a barbaric process which weakens and strains the muscles of the arches, and causes a muscular fatigue which is communicated to the entire body.

In making these shoes the molded inner soles are as-

sembled with the uppers on specially designed lasts, which also reflect the contours of the bottom of the feet, and a springy filler composition is placed between the molded inner sole and the flat outer sole. The entire sole is then rolled under pressure, so that the elastic filling fills the spaces between the inner and outer soles, the entire sole remaining comfortably light. The contours, therefore, remain fixed, while the outer surface of the sole is like that of an ordinary shoe.

Mr. De Ridder's effort, to sum it up, has been to design a shoe that will give the same foot comfort from the start that an old shoe does, without detracting from its outward appearance.



What you see in one of the new X-ray machines, now increasingly familiar in many shoe shops. The normal position of bones and joints is shown in the upper X-ray inset, while the lower inset shows their compression by a new shoe that is both too short and too tight for its wearer.


### How Flat Soles and Tight Laces Ruin Our Feet

IN THE normal human foot the arch may be compared with a resilient bow, which bends under the weight of our bodies as we walk and gives the "spring" to our step.

The accompanying X-ray diagram illustrates the foot's bowlike structure and shows how, in a tightly laced, ill-fitting shoe, the joints of the foot are compressed, while pressure applied by the tight lacing in the direction of the arrow causes the arch to lose its natural, bowlike resiliency. The muscles that should pull it back into shape at each step are strained, and finally grow flabby.

Thus the arches break down, causing muscular fatigue that is communicated to the entire body.

At the same time, compression of the joints against the flat sole often causes bunions and other foot troubles.

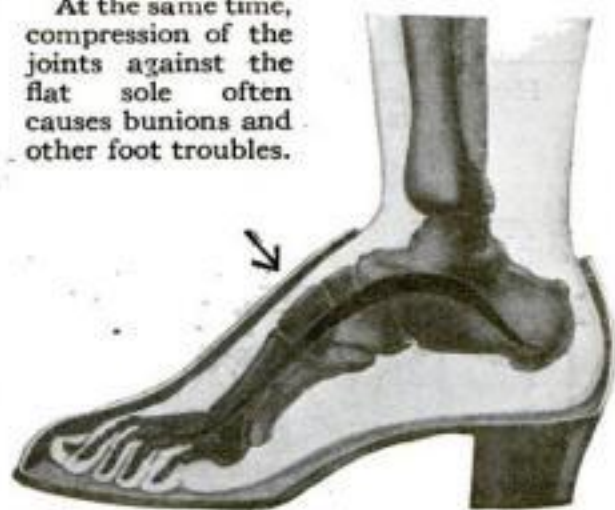



## Automatic Hitch for Tractor Trailer

**S**PECIAL automatic hitching attachments for the tractor trailer, which transfer the dead weight of the trailer from the drawbar to the spring suspended platform of the tractor, have been incorporated in a new type of trailmobile.


By means of a long tongue that slides over the platform of the tractor, 30 per cent of the trailer load is pivoted directly over the tractor wheels where the traction is greatest.

Chain controls permit the tractor driver, from his position in the seat, to drop the trailer. First, the prop that supports the trailer when idle is lowered. Afterward a pin is pulled from the drawbar post and the eyelet of the bar lifted over the post. The tongue of the trailer slides down an inclined skid from the tractor platform.

In hitching the trailer, the driver uses the chain to guide the eye over the pin.




How the tractor driver, from his seat, hitches the trailer, is shown at the right. As the trailer tongue slides up an inclined skid, the driver lifts the eye of the drawbar over the pin by means of the chain

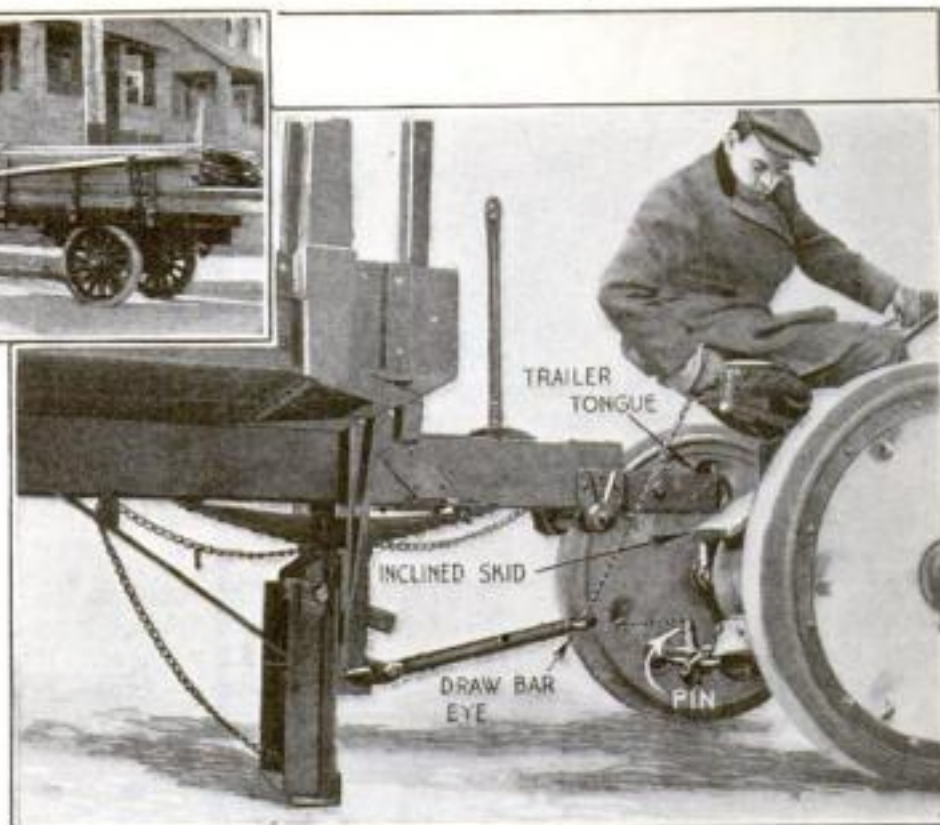

## Glue Pencil Replaces Paste-Pot

**A** GLUE pencil that leaves a dot of mucilage wherever it is pressed upon the paper is the latest invention to replace the pastepot. The device is equipped with a small ball valve at the tip, similar to the valves in some types of grease cups. This makes the pencil leakproof, since the valve closes the tip until the pencil is held vertically and pressed upon the paper.

The barrel of the pencil is filled with mucilage by slipping off the valve head, just as a bottle stopper is removed.

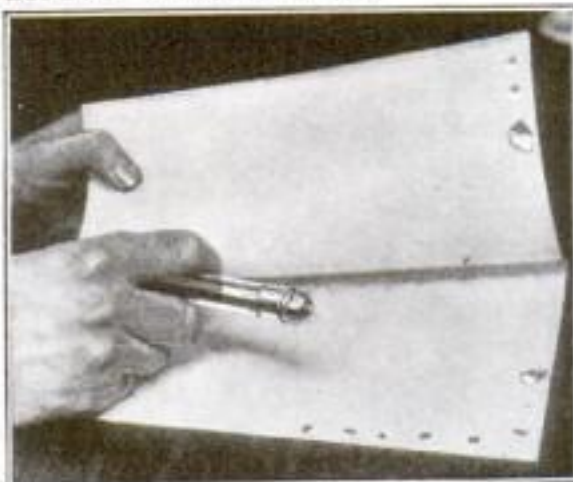

## Rubber and Auto Fuel from Corn Cobs

**F**ROM the lowly corn cob it is now possible to produce low priced substitutes for hard rubber and synthetic resin products, thanks to research work by chemists of the Department of Agriculture. These chemists announce that a new motor fuel supply may also result.

These achievements, it is said, have been attained through the perfection of methods for producing from corn cobs a chemical compound known as furfural. The compound is made in a pressure cooker. Furfural, blowing off with the steam, passes through a condenser and is separated from the water by distillation.

## New Machine Cuts and Folds 400,000 Boxes an Hour

**W**ITH orders for folding boxes being placed by the 100,000,000, and with one plant alone producing 3,000,000 cigarette cartons every day, even the latest development in automatic machinery for making folding boxes, capable of turning out 400,000 units an hour, has difficulty in keeping pace with the public demand for package goods.



How the cardboard blanks are creased and cut

In the latest cutting and folding press the cardboard for boxes is first printed or lithographed on large sized sheets, often in six colors. As many as 300 complete patterns may be laid out on a single sheet of stock, and all of these are cut out simultaneously by a manifold cutting die.

To prepare the boxes for folding, another set of knives placed in the same die scores the creases. The difference in depth of cut between a cutting and a creasing die is only 0.005 of an inch. The diemaker cuts standard rules to the different lengths required for each die, and assembles them in a form as a printer assembles type, using blocks of cherry wood to fill in the blank spaces.


After the cutting form, or "chase" is bolted to the flat bed of the box making machine, a cylinder that rotates just above

is prepared as a "counter die" by gluing a sheet of boxboard around the cylinder and cutting out a little strip of this paper over every creasing rule on the flat die. When the press is in operation, the creasing rules force the stock into these crevices, and make creases for folding, while the longer rules cut a little deeper and sever the stock into blanks for the boxes. The average speed of a press is 1500 full size sheets an hour.

The separate blanks are then fed automatically into a gluing machine, through which they pass at high speed. Here the inside edges of each blank are given a coat of hot glue, then steel rollers fold the blanks along the creased lines with sufficient pressure to glue the box tightly together. The finished boxes are then tied into piles of 100 on an automatic bundling machine.

The entire process is shown below

PRINTED SHEETS FED AUTOMATICALLY

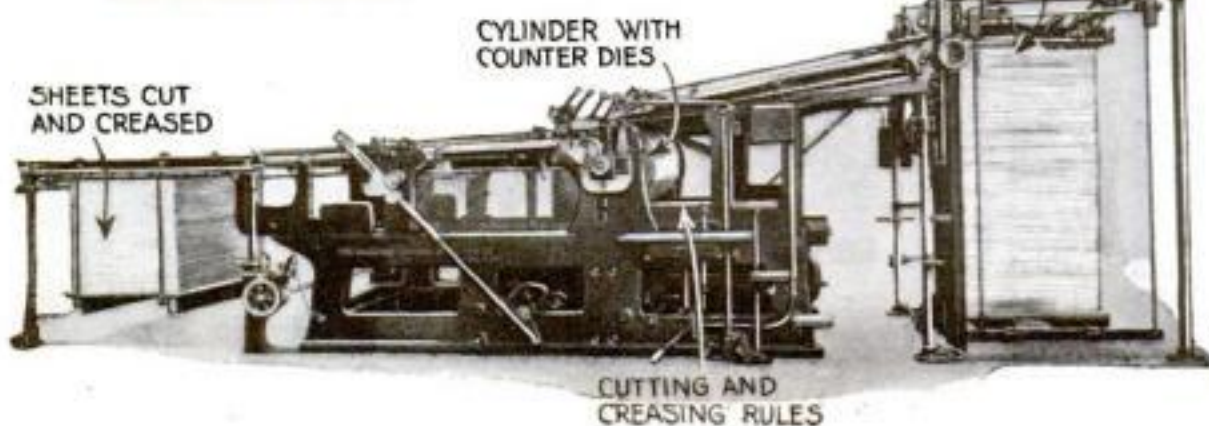

## Snakes Kill Few Persons in the United States

**D**EATH from snake bites in the United States is comparatively rare, although the average mortality from venomous snakes is more than 10 per cent. of the persons bitten, according to figures compiled by the Biological Survey of the Department of Agriculture.

The reason for this is that relatively few persons encounter or are bitten by the dangerous species. The most venomous of American snakes live in sparsely settled districts.



# Whole Community Joins in Nebraska Coyote Hunt



Above: A typical community coyote hunt at Holstein, Neb., in which thousands of grownups and children, forming a 10-mile hollow square, close in and trap the prairie wolves. At right: Nine of the animals bagged in the most recent hunt

**T**HREE thousand men, women and children, distributed over a Nebraska prairie in the form of a hollow square, 10 miles on a side. At a signal, each of the four sides advances, closing in toward the center, guided by captains—and the fun begins.

Rabbits, scared from their burrows, scurry helter-skelter, pursued by the patter of rifle bullets. Grouse, frightened from cornfields, fly up over the inclosing lines, some of them to be dropped by crack shots. Other small animals and birds scamper and flutter to shelter.

## Thousands Participate in the Hunt

The great community coyote hunt of Holstein, Neb.—the big event of the year—is on. And it is a community affair indeed. Long before the day is set, "Are you going to the wolf hunt?" is the one important topic of conversation in Nebraska counties within traveling distance of Holstein; and when the big day comes, hundreds of farmers with their families arrive in wagons, on horseback and in automobiles.

Although coyotes, the thieving wolves of the prairies, are the main objects of the hunt, any wild creature that runs or flies is a legitimate target.

When one of the prairie wolves is sighted, the cry "Coyote! Coyote!" passes down the long lines. As the square grows smaller, fields, hills, and canyons are rapidly combed. The captains ride up and down the lines, closing unwatched gaps through which a coyote might escape.

Yet in spite of these precautions, during the last hunt three broke through the trap to freedom. One of them, creeping over a knoll, apparently hoping to escape the advancing line, which he could see from either side, crouched low in the grass until the tread of the feet was almost on him. Then watching his chance, he picked an opening and leaped for it. The surprised hunters missed shot after shot, and the frenzied animal, traveling at a pace that probably broke the record in coyote annals, actually distanced the gun shots and made himself safe.

A flag tower in the basin of a ring of hills was the objective of the closing lines. But instead of closing up at once and despatching the corraled wolves, the hunters halted a few hundred yards away while horsemen entered in a futile but exciting attempt to

rope the coyotes. One rider, failing to loop the animal he was chasing, caught up with the elusive creature, and grasped it by the tail, later riding around the ring proudly displaying the snarling beast before killing it.

Finally the thousands of closely packed foot hunters impatiently broke from the lines, firing at the animals whenever the chance offered. When the closing signal was blown, a counting showed nine dead coyotes. The pelts were auctioned off and the proceeds donated to a local charity.



## Fire Blasts Kill Weeds in City Parkway

**F**IRE-BLASTING is now being used to destroy weeds along the parkways of Alhambra, Calif. The city has equipped a wagon with a combination pressure tank,



Blasts of flame from a mixture of kerosene and air, sear the weeds

## Huge Hillside Sign Built of Old Boxes



**C**LOSE inspection reveals that the builder saved money by forming odds and ends of packing box lumber into letters and painting them

**O**N A steep hillside in the suburbs of a southern California city is a huge outdoor advertising signboard consisting of but one word—"Lots"—in white letters 75 feet high and a maximum width of 20 feet. The sign can be seen and read for two miles along a much traveled boulevard. From a distance it appears as if it were built of concrete, but—



a kerosene reservoir, and a small gasoline engine to drive a centrifugal blower.

From the tanks the mixture of vaporized kerosene and compressed air is delivered through hoses ending in long metal nozzles improvised from 1½-inch pipe. The blast of flame is so hot that weeds are consumed in an instant. Two men with this apparatus can destroy as many weeds in an hour as they could dig in a day.





# Camera Reveals Winning Horse when Judges Fail

HORSE races "won by a nose" are too close for the human eye to judge correctly, say experts. For this reason European race tracks are adopting a photographic method that not only pictures infallibly the final result, but also preserves a vivid record of the thrilling progress of the leaders during the last six feet of a neck-and-neck run.

Five individual cameras are inclosed in one box, with the lenses arranged one above the other. Electrically controlled shutters set in motion by observers

## Which Is the Winner?

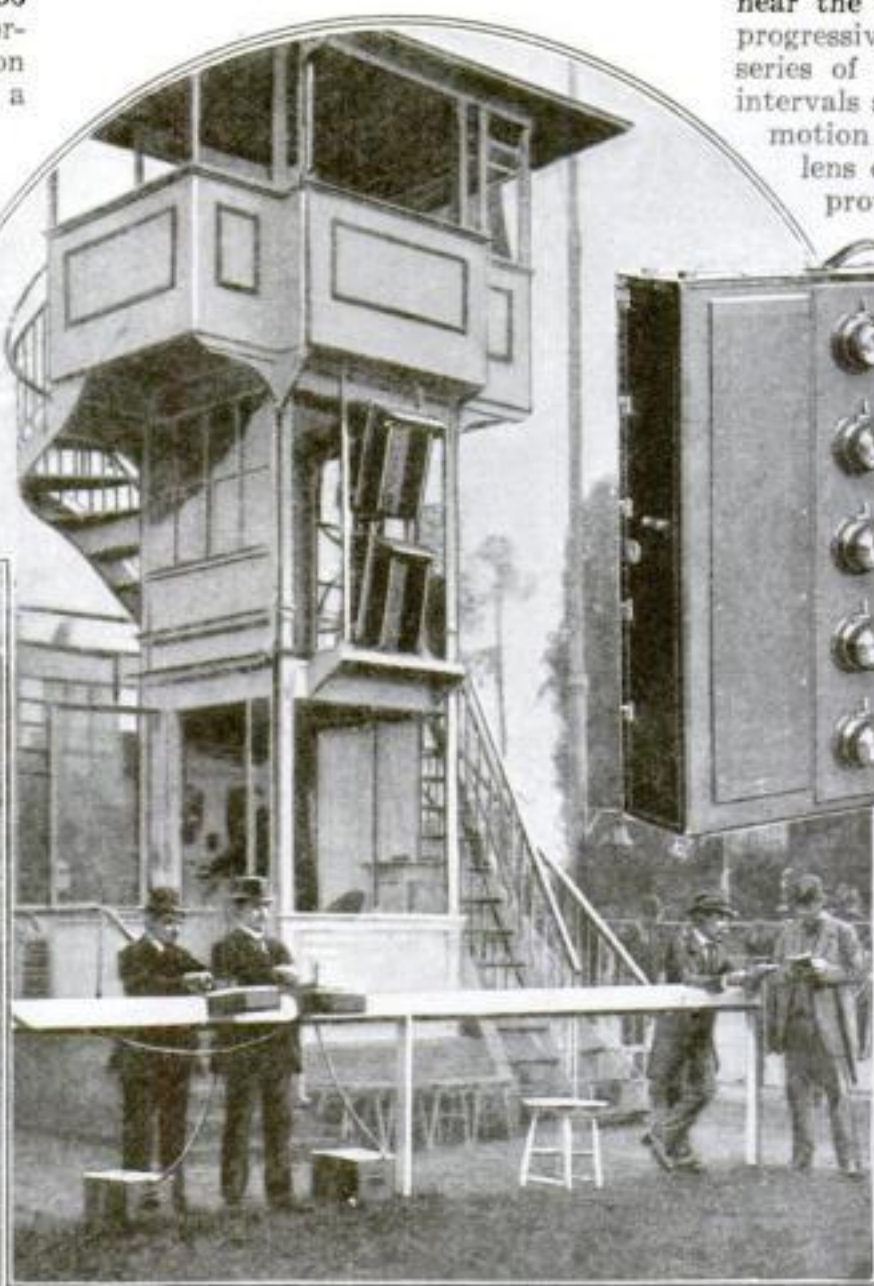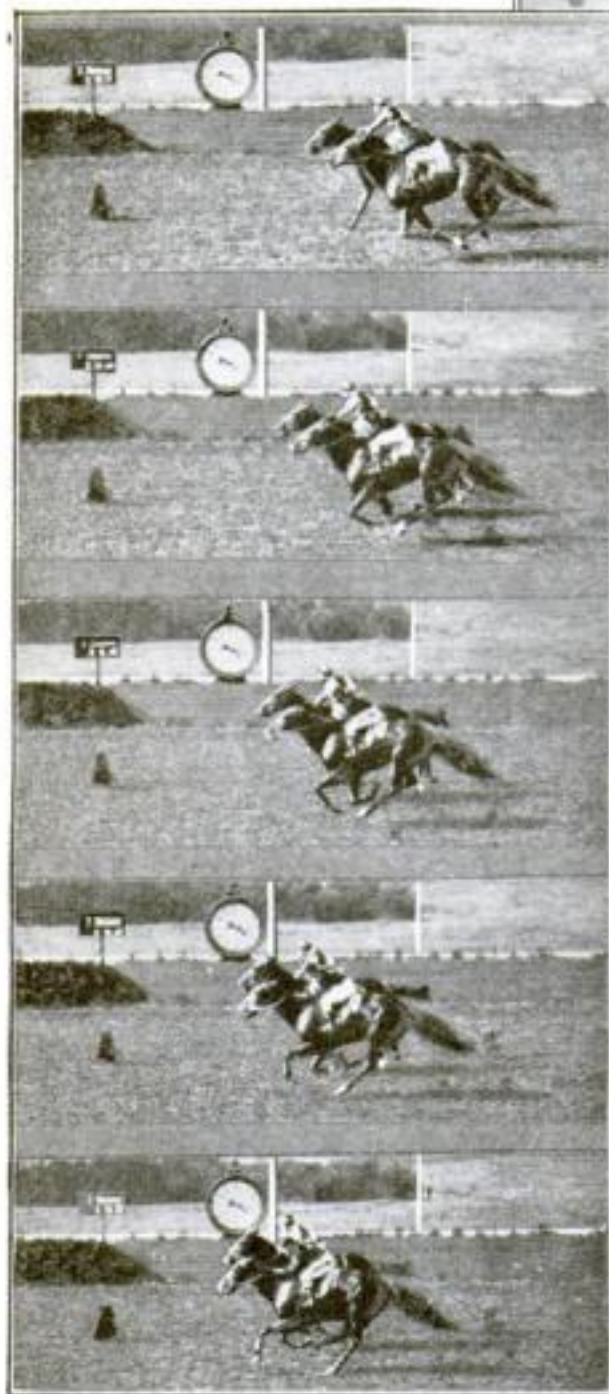

Typical installation of the new European "umpire cameras," which reveal the winning horse in a close race more accurately than could any human eye, is shown above, the black boxes halfway up the judges' stand each containing a five-lens camera of the type illustrated in the inset. Note in picture at left, that the second horse passed the winner an instant after crossing the line

near the track open the camera shutters progressively. The result is a progressive series of five photographs taken at brief intervals similar, except in frequency, to a motion picture strip. An ultra rapid lens designed especially for the work, provides the necessary definition over a wide field.

The plates are specially selected for their extreme sensitiveness. With the combination of fast lens and plate a shutter speed of 1/1300 of a second is possible.


An idea of the rapidity demanded in the lenses is easily understood from the fact that the distance covered by each galloping horse between one picture and the next is approximately 40 centimeters, or about 16 inches. The five pictures taken together represent a distance covered of slightly over six feet six inches.

To be of use as a basis of decisions it is essential that the plates be developed within a short time after the finish of the race. Apparatus conveniently arranged accomplishes this. In practice it was found possible to have the five plates developed and enlarged to a 16 by 20 sheet within eight minutes after the horses had crossed the finishing line.

## Chain Screens Protect from Furnace Heat

PATENTED protective screens, made of many small chains hung vertically from the top of the furnace door hold back the intense heat of the fire in many American factories and prevent flames from striking back at the worker when the door is opened. The fire is constantly visible through the strands, yet thermometers have shown that with the screen in place 85 per cent of the glare and heat from the glowing bed of coals is held by such means within the furnace.

Where tongs must be used to insert and withdraw material from the furnace, the chains terminate in metal tubing, since chain links would catch in the jaws of the tongs. In other installations the chains are arranged on pulleys so that when the furnace door is opened, the screen drops in front of the aperture.

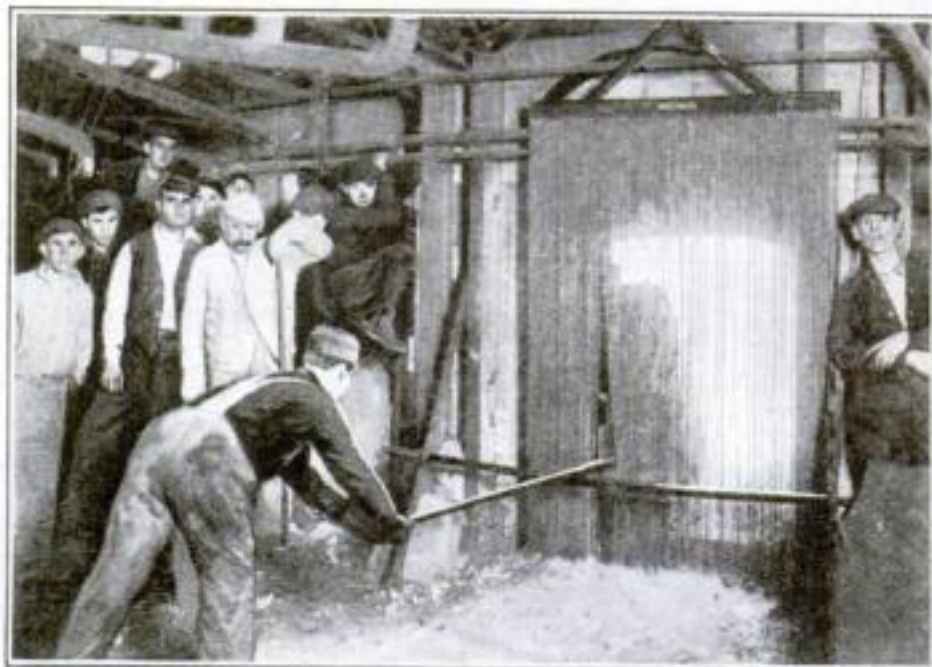

Numerous small chains, hung at the furnace door, hold back 85 per cent of the glare and heat

During the recent test of the effectiveness of the chain screen, a thermometer registered a temperature of 110 degrees at a point 10 inches from the closed door. When the door was opened without a screen in place, the temperature increased to 400° F. Upon screening the door, the thermometer dropped to 135 degrees, showing a heat protection of 265 degrees.

## New X-Rays Discovered

MEASUREMENTS made in 12 different gases and vapors by the Bureau of Standards reveal X-rays having wave lengths never before known. There has always existed a dark region between the waves of visible light and those of the longest X-rays, but this gap is now nearly closed.

X-rays, light waves, and radio waves differ in their wave lengths. Radio waves are the longest, then follow light waves, which vary from the red end of the spectrum to the violet, and lastly the X-rays, the longest waves of which have been found to be only one billionth of a millimeter in length, a millimeter being about one twenty-fifth of an inch.



# Will New "Sugar Cane Lumber" Cut Cost of Home Building? Great Strength in Boards of Waste Fiber

A NEW "woodless" lumber, manufactured from sugar-cane waste and remarkable for extreme lightness, strength, and excellent insulating qualities, is now being turned out by Louisiana manufacturers, who claim that their product will lower the cost of house construction, cut home fuel bills in half, and, when made into shipping containers, save hundreds of thousands of dollars annually in freight bills.

## "Cane Boards" 900 Feet Long

One of the unique characteristics of this "magic cane lumber" is the extraordinary size in which it can be manufactured, boards 12 feet wide and 900 feet long—nearly the height of the Eiffel Tower—having actually been produced in a plant recently erected in New Orleans, La.

The new lumber is made from "bagasse," which is the fiber left after the juice is pressed from the sugar cane. A yearly production of nearly 500,000 tons of bagasse was formerly burned under the boilers of the sugar refineries as the cheapest way of disposing of it; but recently a process has been discovered by which it can be converted into a lumber that will not split, and which is so light that a man can lift a board four feet wide and 12 feet high with one hand.

The first step in the lumber-making process is to cook the fibers in huge vats to kill the spores that otherwise would cause decay. The fibers are then placed in beating machines, which separate them. Here they are treated with waterproofing chemicals and coated with a sticky substance that makes it possible to mat them together.


The final step in the manufacture is to compress the fibers into lumber by passing them beneath heavy steel rolls. The lumber leaves these presses in long, continuous sheets that move slowly through a 900-foot drying oven, heated to 300° F., where the water content is evaporated. This oven is said to be the largest of its kind in the world, removing 120,000 pounds of water daily. The sheets are then cut automatically by saws into standard lengths, and stacked for shipment.

Like wood, the bagasse lumber is composed chiefly of cellulose. The finished product resembles exceedingly hard, tough cardboard.



A 4 by 12 foot sugar-cane board that a man can lift with one hand

At right: In huge breaking machines the sugar-cane fiber is reduced to short lengths and mixed with chemicals to form a cohesive building board

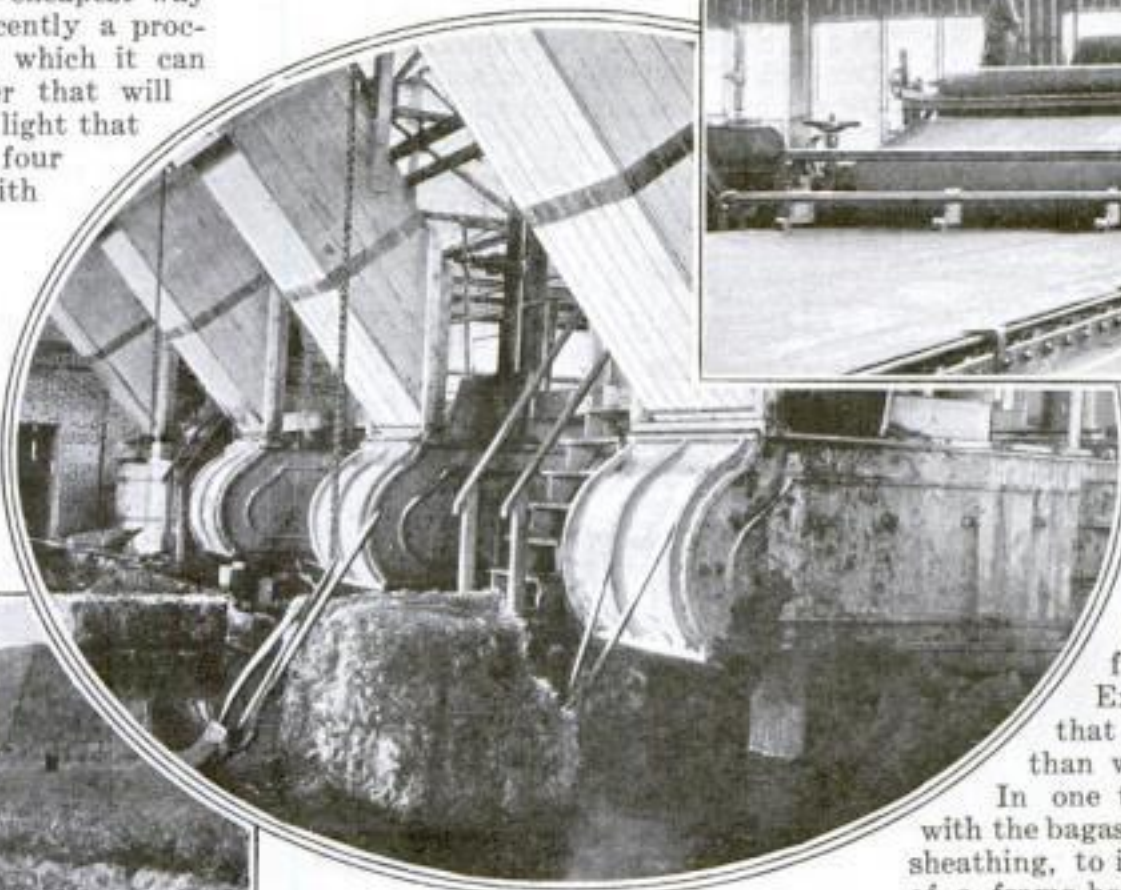

From beneath giant rollers that compress the sugar-cane fibers, the new lumber issues in an endless board



Ten thousand tons of bagasse at New Orleans, waiting to be manufactured into building board

Because the fibers are very long, the material cannot easily be split by driven nails. The felting and compacting process fills the structure with tiny air cells that make it light and impervious to heat.

The new lumber is being used for siding on houses and for making packing boxes. Since quarter-inch bagasse boxing material weighs only a quarter of a pound to the square foot, its use results in a great saving in freight charges. For example, one company that formerly shipped 100-pound packages of merchandise in wooden containers weighing 20 pounds, now ships the same merchandise in bagasse weighing only 8½ pounds. For a distant shipment in carload lots, this company announces a saving of \$1400 a car.

Because of its insulating quality, the new lumber in the form of boxes is said to hold merchandise at the packing-room temperature for three days when shipped in the ordinary freight cars. This quality often

eliminates the need of refrigerator cars.

Experiments seem to indicate that bagasse lumber is stronger than wood for house construction.

In one test, studding was covered with the bagasse lumber and ordinary wood sheathing, to imitate a section of the side of a frame house. The siding was nailed on in the usual way, and the lower sill of the frame was clamped to the base of a testing machine, while an upward pull was applied to the top plate. In the bagasse lumber, there was a movement of only 0.01 inch at a pull of 1200 pounds, and 0.42 inch at 2600 pounds, while the wood sheathing of three-quarter-inch boards six inches wide was moved 2.14 inches at 1200 pounds.

## As a Substitute for Wood

Bagasse lumber is said to be fire resistant and to take paint, plaster, calcimine or stucco without treatment. One ton of bagasse will make 3000 board feet of lumber. The makers estimate that the waste from the Louisiana canefields alone could produce a billion and a half board feet of "lumber" annually. The best grades of this "woodless" ceiling and weatherboarding lumber recently sold at \$38 a thousand square feet, as compared with a price of from \$50 to \$60 on ordinary ceiling.



This bungalow was built entirely of the new woodless lumber





### Smoking on Air Liners Is Safe with Pipe Cap


**PIPE** smoking on air liners is made safe by a novel pipe cap and lighter recently introduced in England. It consists of a cylinder of metal gauze closed at one end and terminating at the other in an attachment to the pipe bowl.

The match is inserted through a self closing aperture in the gauze and ignited by striking the head on a strip of abrasive material inside. The gauze allows air currents to pass inward and the smoke outward, but the flame within can never ignite gasoline vapor on the outside, since the fine wires quickly lower the temperature of the flame below the gas ignition point.

## Traveling Crane Cleans Water Intake

**T**HE use of a traveling electric crane to clear silt and debris from the water intake of a power plant is a new departure in engineering. In the installation at Cincinnati, Ohio, large debris is arrested by heavy iron grillwork backed by traveling screens, while a grab bucket from the crane removes both the silt from the well and the driftwood from the front of the hurdle or grill. The grab bucket is often called on to handle heavy material. Frequently it brings up large water-logged timbers, and on one occasion a cow drowned in an upriver flood some weeks before.

The intake well is shaped like a sector of a circle, and the crane spans it radially. One end of the crane pivots and the other travels on an arc-shaped track at the outside edge of the well. The crane trolley with its suspended bucket travels along the entire length of the crane, and is con-

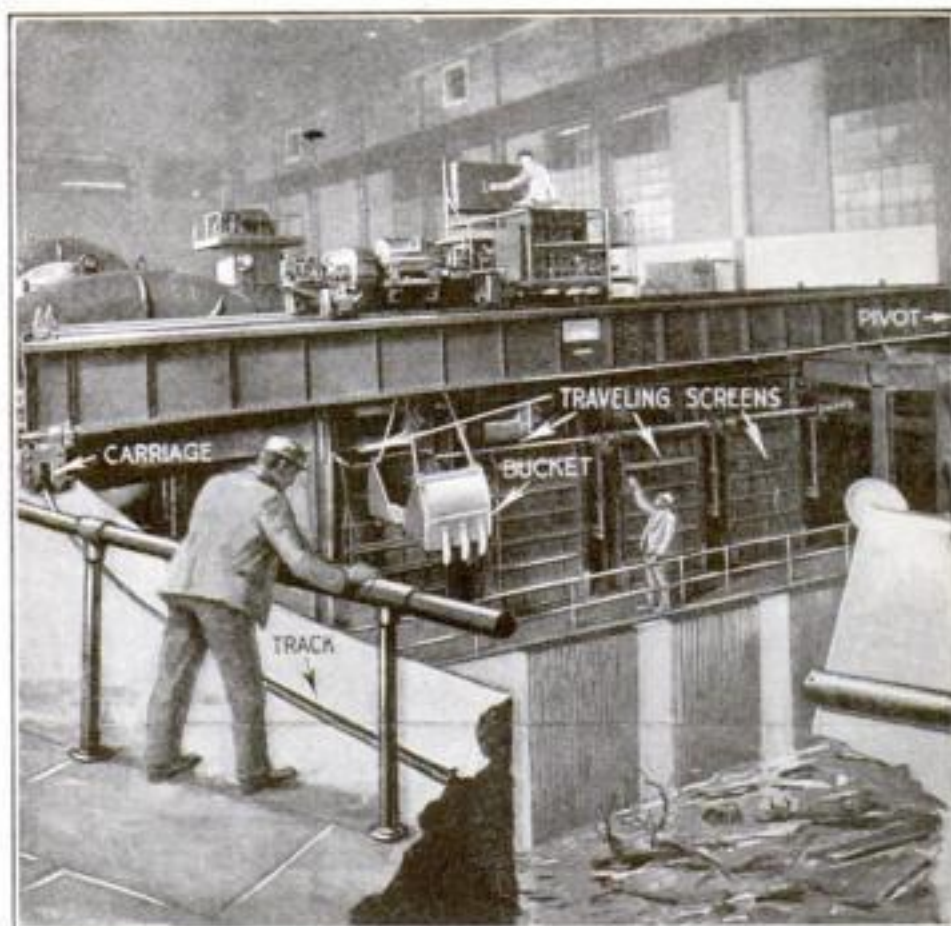

As the pivoted crane sweeps along the arc-shaped well, a grab bucket removes debris arrested by grillwork

trolled by an operator, who is guided in his action by peering down between the I-beams from which the bucket is suspended.

The extreme span is 50 feet, and the total lift of the bucket 100 feet. Two  $7\frac{1}{2}$ -horsepower motors operate the trolley, and two 45-horsepower motors the bucket. All four of the motors are equipped with electric brakes.

### Engine Runs Homemade Coal Conveyor



Coal passes through a chute at the bottom of the truck to the conveyor, which carries it to another chute leading into the cellar

**T**O DELIVER coal to customers living in houses 50 or more feet from the nearest driveway, without injuring the lawns, shrubs, and flower beds surrounding the dwelling, an ingenious coal dealer in Seneca Falls, N. Y., has built for himself a portable conveyor out of odds and ends picked up about his coal yard.

The conveyor, driven by a  $1\frac{1}{2}$ -horsepower gasoline engine, is mounted on two wheels and is long enough to bridge a lawn from 30 to 50 feet wide. The coal is delivered to the conveyor by a short gravity chute from the bottom of the coal truck and is carried to the top of the conveyor trestle, where it is dumped into the chute that delivers the coal through a window to the bin in the cellar.

After the gasoline engine of the conveyor has been started and the trapdoor of the truck opened, the coal automatically begins its journey to the coalbin without any manual assistance. Two tons of coal

can be delivered by this conveyor in not more than six minutes.

### Sunlight Cure for Rickets

**T**HAT rickets, a common disease among children, is caused by lack of sunlight rather than by lack of vitamins, as has been supposed, is the conclusion reached after experiments with sunlight at the College of Physicians and Surgeons, Columbia University.

Tests with animals revealed that the disease was contracted almost without exception by those kept in darkness, while other animals on the same diet, but exposed regularly to sunlight, showed no signs of the disease.

Ultra violet rays of the sun, passing through the skin, are believed to act powerfully on the blood, effecting what is usually a permanent cure.

### Silent Practice 'Cello Is Collapsible


**R**EALIZING that the long hours of practice on her 'cello sometimes bothered occupants of adjacent rooms, Mlle. Adele Clément, an honor pupil of the Paris Conservatoire, has invented a semi-mute 'cello which is collapsible.

Without sounding board and sound chamber, the 'cello cannot be heard outside the room in which it is played.



Practising on the silent 'cello



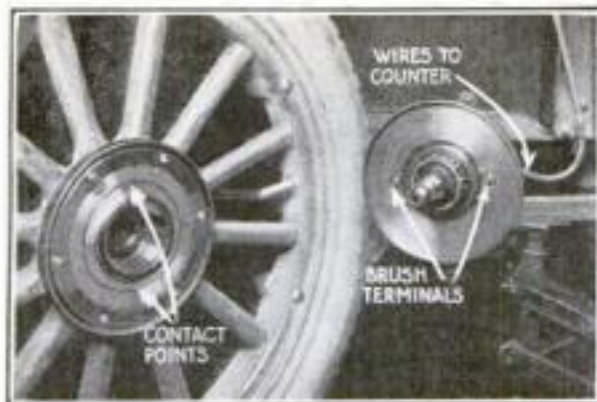

### Counter on Auto Wheel Measures Distances

**G**REATER speed in road measurements, such as are required in staking out telephone poles, has been obtained by the invention of an electric device, attached to the automobile wheel, that accurately records distances.

The counter is mounted on the instrument board, and is operated by an electric interrupter on the front wheel, which consists of two small stationary brushes in contact with a revolving surface fixed to the wheel. Insulated segments set in the part attached to the wheel interrupt the circuit through a counter magnet as they pass over the brushes. The interrupter is arranged to count half revolutions of the wheel, each count representing about four feet.

The above photograph shows the wheel lifted from the axle, revealing contact points.

## Movable Stairway Vanishes into Ceiling

**P**ORTABLE stairways that slide into the room above have been developed for use in bungalows where space must be conserved and in houses where space is not available for permanent steps. A panel-covered opening about the size of an ordinary door accommodates the passage of the stairway through the ceiling.

The stairway slides on rollers supported by the hinged ceiling door. When it is desired to use the steps, a slight pull on a chain lowers the panel and the stairs slide downward. A catch at the top holds them securely.

To raise the stairs the housewife slides them up on the panel, aided by the springs, partly supporting the weight of the stairs. After a certain point has been reached, the counterbalance formed by the upper end automatically closes the panel door into the ceiling.




Pull a chain, and the stairway slides down on rollers



## Truck Body Dumps Bricks in Neat Pile

**A** SPECIAL truck body recently developed for handling bricks will dump an entire load in a neat pile containing from 500 to 2600 bricks

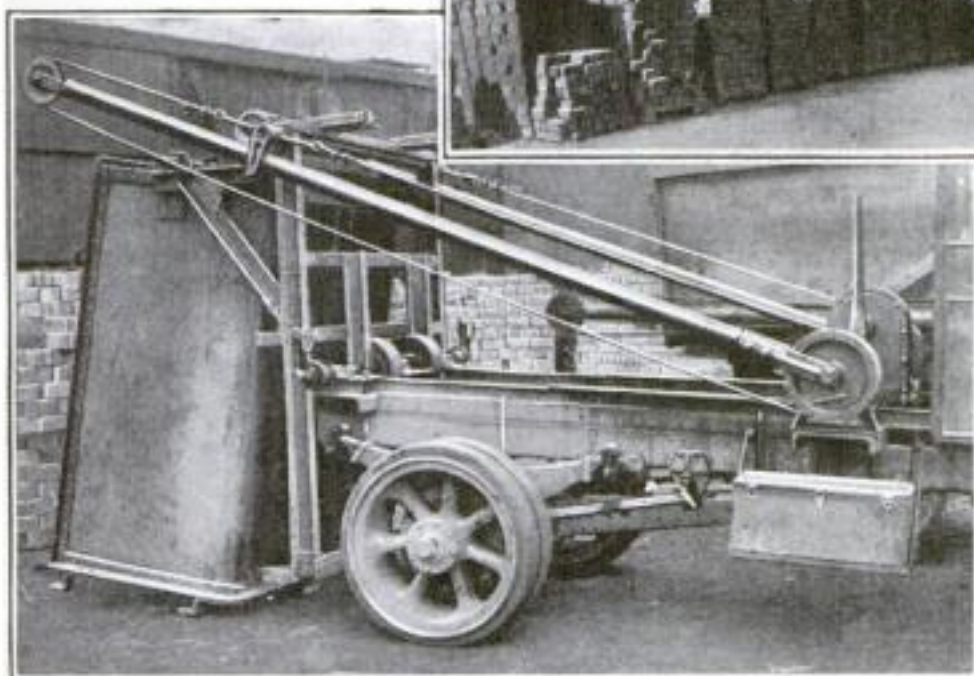

When the loaded body has been tipped backward to a vertical position, the truck moves forward, leaving the bricks stacked in a neat pile as shown above

without breakage. Only one man is needed to operate the truck and body.

In loading the special body, a wooden platform or pallet is inserted in brackets at the rear of the body. The bricks are then piled against the pallet. When it is desired to dump the load, the power of the engine is geared through to a mechanism that tips the body backward to a vertical position. This motion deposits the bricks on the pallet so that when the truck is driven forward the rear of the body slides from under the pallet, leaving the bricks piled on it.

The body is demountable and may be set on or off the truck by using the power of the engine. One body can be left at the yard for loading while another is on the truck making a delivery.

The frame of the dumping device is

bolted to the chassis of the truck and the hoist is set on a 12-inch channel. The cradle is pivoted on a rear dumping shaft in such a manner that when pulled back on the truck, the front end can be hoisted. The body slides along the truck on two large rollers, while two small rollers on the rear dumping shaft support the cradle.

### Holding Cradle in Place

Projecting arms with hooks on the cradle engage a cross pipe on top of the body to hold it in place when the body is picked up or pulled from a pile of brick.


The hoist requires from three to five horsepower and is connected with the power take-off of the truck by a sprocket and chain.

## Air Raid "Listeners" as Radio Amplifiers

**L**ARGE horns that were used in England during the war to listen for the approach of German air raiders are being converted into radio horns for the entertainment of the public.

Instead of receiving sounds from the air and intensifying them by reflecting them upon a microphone placed at the tip of the cone, as they did during the war, these horns now act as megaphones for the broadcast distribution of sound waves reproduced in amplified intensity by the diaphragm at the small end, operated by the impulses of the radio waves.

The set shown below was recently used at a military exhibition at Tolworth, England, to amplify radiotelephone messages sent from airplanes.

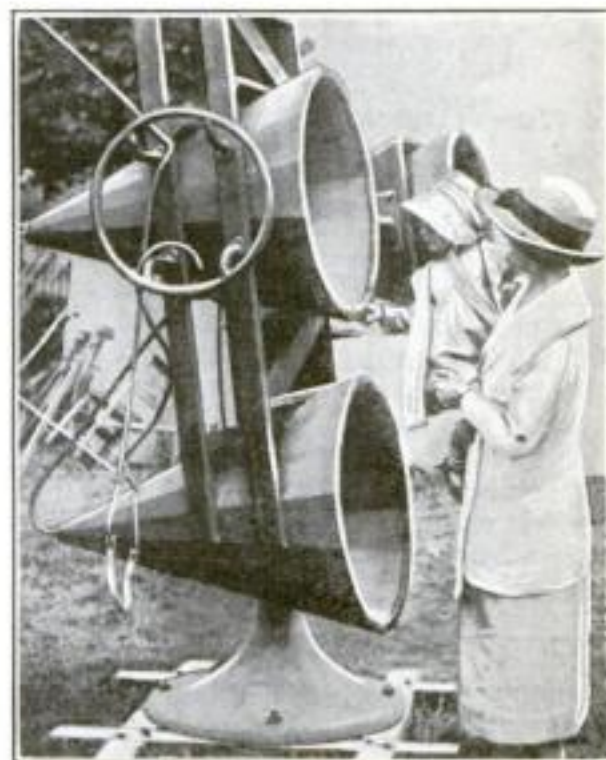

© K. & H.


Once used to detect air raiders, these horns are now radio amplifiers



## Desks "Out-of-Square" Help Pupils' Eyes



With desks at an angle to aisles, the light passes over the "rhomboid desk," as shown below

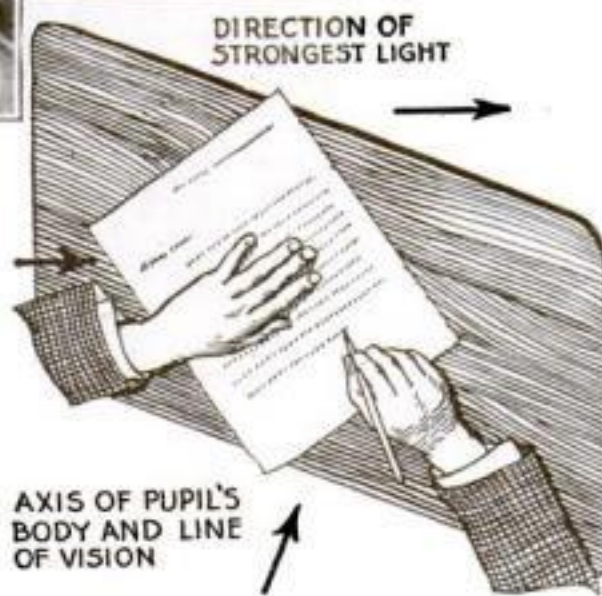

**TO SOLVE** the problem of comfortably seating school pupils with their backs to the windows and their faces toward the teacher, and so eliminate eye strain, strangely shaped desks are now being manufactured, the tops of which are in the form of "rhomboids," or figures that may be described as "distorted rectangles," having opposite sides and angles equal, but not being equilateral. These desks are now in use in classrooms in Modesto, Calif.

In the usual modern schoolroom, windows occupy nearly 70 per cent of the wall area, and with the rectangular arrangement of seats, nearly three quarters of the pupils' work is done in direct and reflected sunlight, crossing the line of vision at an acute angle.

To lessen this angle the inventor has placed each desk and seat at an angle of


22½ degrees to the aisle. In order to keep the side edges of each desk parallel to the aisles, the top of the desk is shaped in the form of a rhomboid. The light from the windows passes over the left shoulder, and the position of the pupil is such that his line of vision is brought close to the line of light.

## Twin-Seat Motorcycle Runs on Two Wheels

**A** MOTORCYCLE for two, with seats side by side and minus the sidecar requiring support by a third wheel, has been developed by a French inventor.

The frame of the machine supports between the wheels a cross frame providing a seat on each side and a double footrest large enough to hold small baggage. A double fork in front is turned by handlebars on each side of the machine.

The inventor claims that even a considerable difference in the weights of the two riders will not materially affect the balance of the machine and its vertical position.

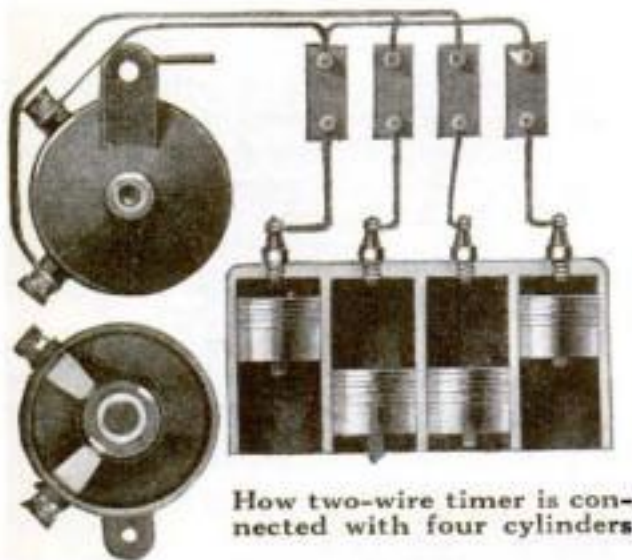

## Two-Wire Ford Timer Needs No Lubrication

**IN** A newly invented timer for Ford cars, which uses two wires instead of the usual four, sliding brushes and contact surfaces are of copper and brass, eliminating need of lubrication and insuring an excellent electrical contact of low resistance. The case of the timer is molded of composition material.

Fouling of the timer wires by the fan belt is prevented by locating the two lead wires from the timer on the side opposite the belt.

**THE** Editor will be glad to supply, wherever possible, the names and addresses of manufacturers of devices mentioned in this magazine.

## 200-Foot Radio Tower Moved on Railway

**BY** THE ingenious use of two parallel railway tracks, four street-car trucks and screwjacks, soldiers at Fort Sam Houston, Tex., recently lifted a steel radio tower from its foundation, transported it in an upright position to a site 250 feet distant and placed it on a new foundation—all within 10 days.

The feat was especially remarkable for the fact that the tower weighs 35 tons, is 200 feet high, and rests on a base only 26 feet square. The new location is nearly seven feet higher than was the original foundation.

Two parallel tracks were laid from the tower to its new location and on each track two street-car trucks were placed. The tower was guyed to dead men and the guy ropes were slowly paid out as the tower was lifted from its foundation by four screwjacks.


On each one of the four trucks, coupled in pairs, one of the supporting legs of the tower was placed. Then the trucks with their load were pulled by chain tackle up the slight incline to the new location. Lifting the tower off the trucks and depositing it safely upon the new foundation was accomplished by screwjacks.



Screwjacks raised the four legs of the radio tower to four trucks, which were hauled by chain tackle



# Trade-Pulling Window Displays World Products

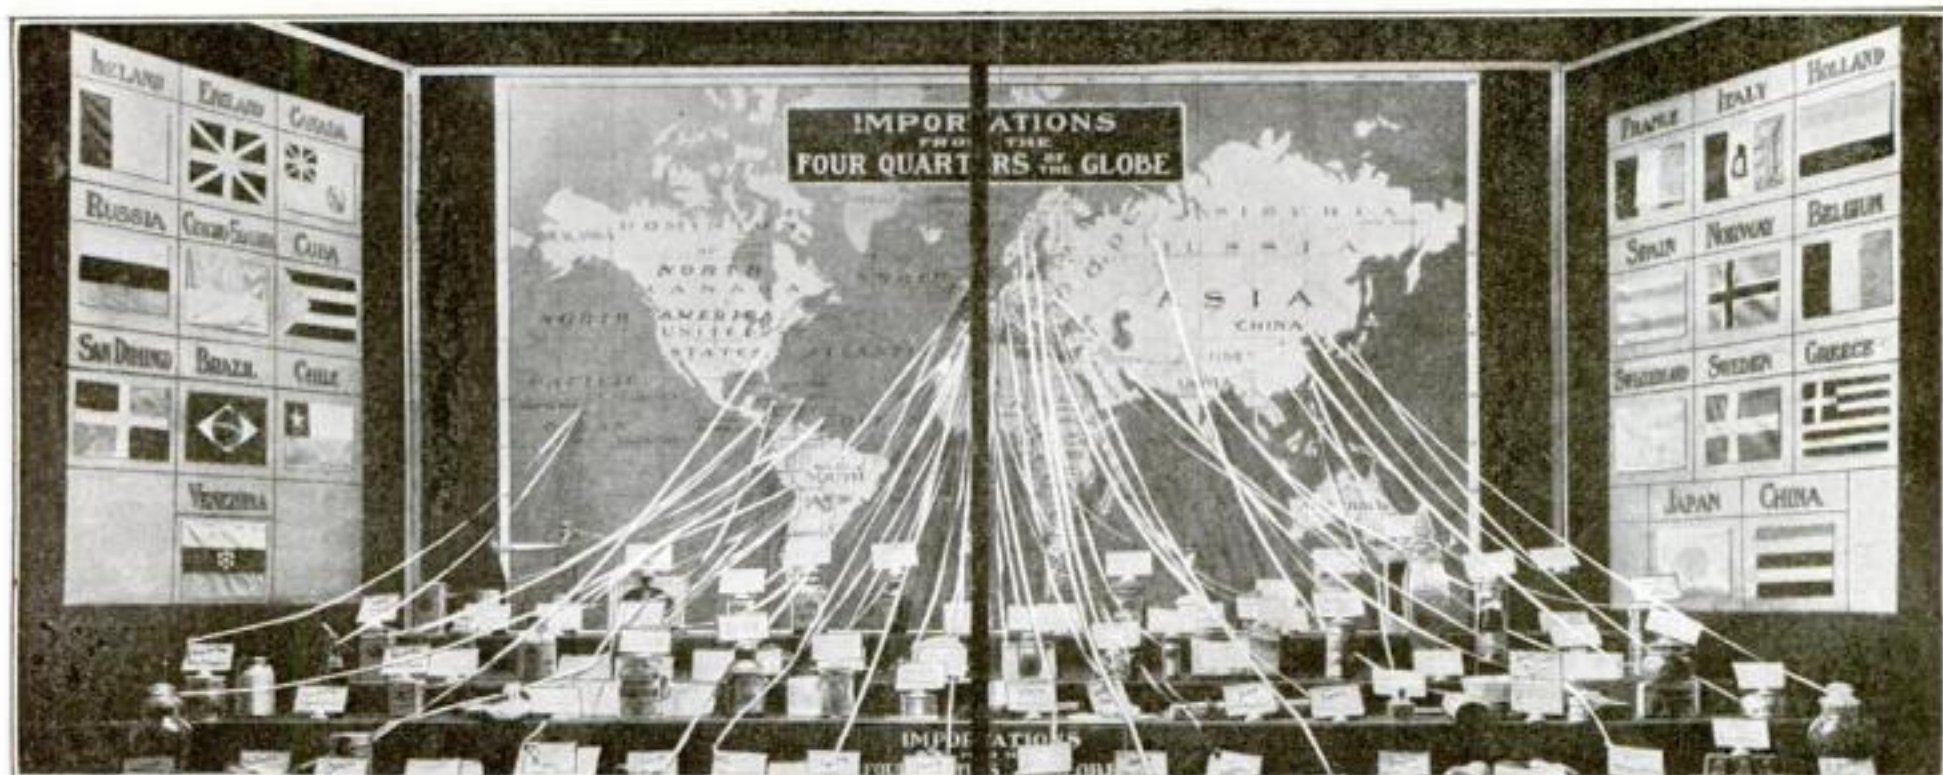

A WINDOW trimming idea that not only attracted a continual gathering of pedestrians in Boston, Mass., but brought many requests from school teachers for photographs of the display, consisted merely of a huge map of the world with ribbons connecting the various countries with samples of the food products obtained from each country.

The map, like a back drop of a theater, filled the entire rear wall of the show window. Two panels at the sides carried

the flags of all the nations. Ribbons attached to the map with thumbtacks led down to the items imported by the grocery firm in whose windows the exhibit was placed.

The map showed coffee from Brazil and Arabia, tea from China and Japan, India, and Ceylon, and oatmeal from Ireland and Scotland. Several ribbons led from Canada to packages of tobacco and containers of cheese. Spain contributed almonds, olive oil, and sweet red peppers; and San Do-

mingo sent lime juice and pickled limes. Practically every item known to a household was present in the display and properly tagged to its source.

To add to the interest, a pile of letters carrying strange appearing stamps from all nations were scattered in the foreground of the window.

This unique educational window display is not limited to the grocer, but could be made fully as interesting by the druggist, candy store or dry goods merchant.

## Shaft of New Propeller Is above Water



Speed equal to that produced by twin screw propellers, with 41 per cent less shaft horsepower, is claimed for the new vanes

Below: With propeller shaft well above the water line, the vanes are only partly immersed



WASTE of power in propelling shallow draft ships has been lessened recently by a Scottish firm of shipbuilders through the perfection of a method of driving such craft through shallow waters by means of "vane wheels," that are only partly submerged.

The vane wheel consists of a hub, to which are attached three radial vanes, similar in form to the blades of a ventilator. The vanes have a decided pitch and, striking the water at an angle when in motion, exert a forward thrust on the ship when rotating in one direction and a backward pull when rotating in the other. Each vane is riveted to two arms that form an integral part of the hub.

Two of these wheels are placed either side by side at the stern of the ship, or separately, at a slight angle, one at each

side of the craft, near the stern. They have identical dimensions and are rotated with the same speed, but in opposite directions, so as to balance the unavoidable side push exerted by the rotating blades.

Tests made with this new method of propulsion revealed that the vane wheels gave the same speed as twin screw propellers with 41 per cent less shaft horsepower. This is principally due to the fact that the wheels are only partly immersed, while the shafts and hubs are above water, and therefore exert no resistance by friction. The vane wheels also have the advantage of great maneuvering power; they turn the ship around its own center.

## Suction Tool Cleans Full Swimming Pool

REMOVING dirt and sediment from the bottom and sides of an indoor swimming pool, without draining the water from the pool, is possible now with the perfection of a suction tool resembling a vacuum cleaner.

The cleaner is attached to a long, flexible hose, one end of which is coupled to a permanent plug in the side of the pool. The narrow suction slot of the tool is armed with a stiff brush that scrapes sediment from the borders of the tank. Suction is produced by an electric or gasoline pump.



Dirt, loosened by a stiff brush, is sucked through the cleaner



# New Electrical and Mechanical Devices to Lighten Housework



Pressure with one finger is all that is required to turn this novel egg beater. A spring does the rest




Three electric service outlets, into which anything from electric fan to sewing machine can be plugged, make the portable wired table, shown above, a real household servant. The top is just large enough to hold electric table appliances



A twisted wire, supplied with a handle, whirls the sickroom thermometer rapidly, eliminating the bother of shaking



In baking meat, where constant basting and turning are required, the housewife will find this combination aluminum spoon and fork particularly useful

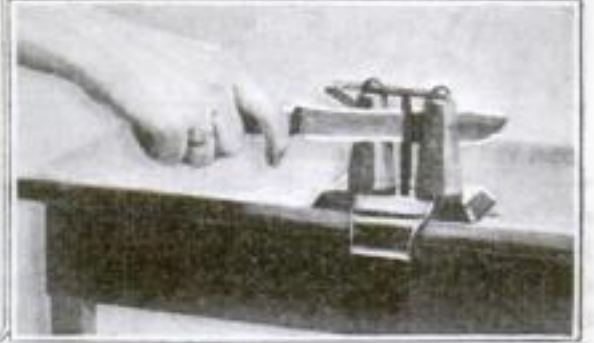


Against two cone-shaped, rotatable stones of this novel sharpening device, the knife blade is passed back and forth. The base is clamped to the table



Water from two faucets, rushing through this utility motor, generates power to operate utensils for grinding or polishing, beating eggs, or washing bottles. The spent water empties into the sink

**T**HE Editor will be glad to supply, whenever possible, the names and addresses of manufacturers of devices mentioned in this and other issues of *Popular Science Monthly*.

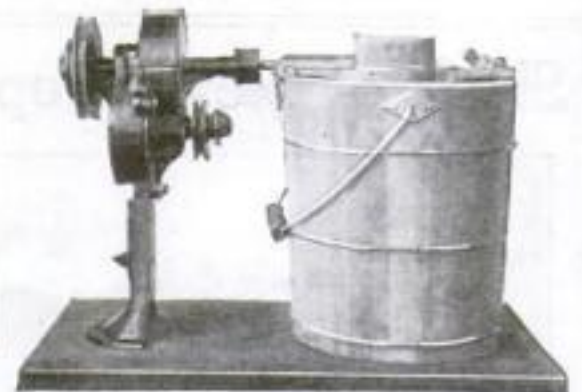

An electric washing machine motor can be made to turn the ice-cream freezer by the use of this geared countershaft, which, through a series of pulleys, can impart a variety of speeds

© U. & U.



This jelly bag is pulled through a wooden grip before the hot juice is poured. To squeeze the bag, the grip is pulled down



Shaped to fit the contour of the hand, the iron handle shown above was designed to take drudgery out of ironing day



Breakfast can be cooked on the dining-room table that is wired for plugging in the electric toaster or cooker



Armored with sharp edges of copper, this novel glove rubs and scrapes the skins from potatoes



Receptacles for powder, creams, and other beautifiers are sunk in the top of this convenient dressing table



## Steel Fence Post Screws into the Ground

MUCH of the drudgery of fencing has been eliminated by the invention of an auger-like steel post that screws into the ground and is locked firmly in position by a vertical plate attached to the post, working equally well in hard or soft ground.



A steel lever, sharp at one end, is used first to start the post into the ground, and then is attached as a lever in turning the bit.

When the post has penetrated the ground as far as the vertical plate, a few taps start the plate into the soil and at right angles to the line of fencing. The plate is then pulled into the ground by further turning of the post.



Turned by a long lever, the auger-like fence post bores its way into the ground

## One Tank of Water Cleans Four Manholes

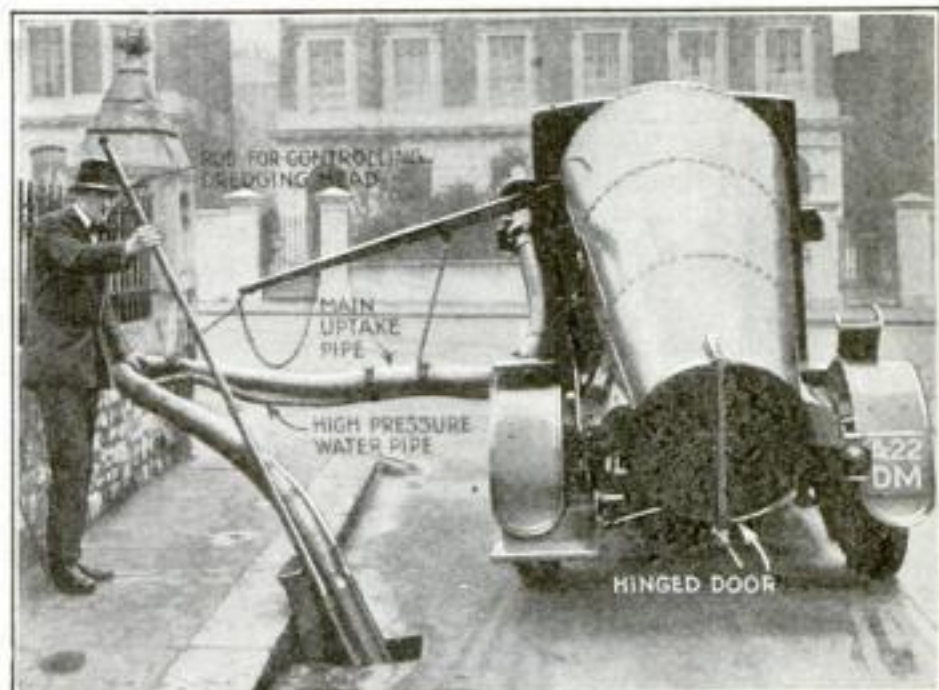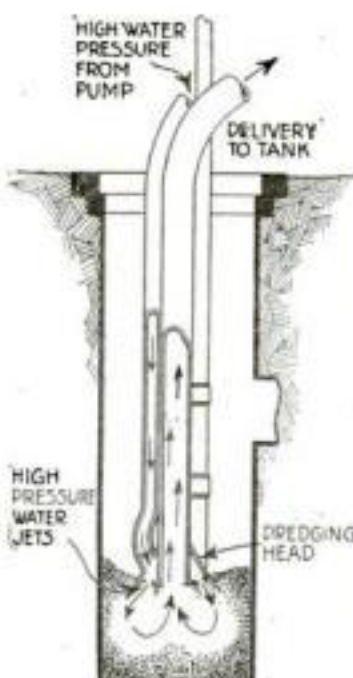

Water from a high pressure pipe churns sediment in the manhole. This sediment is sucked back to the tank through a larger pipe, as shown in the diagram at the left

THE work of cleaning sewer manholes is now greatly facilitated by a recently invented transportable apparatus, consisting of a conical inclined tank, a force pump and a suction pipe, which will flush four manholes with 400 gallons of water—the amount usually required to clean one.

This saving is effected by the use of the same water again and again.

The tank is mounted at an angle of about 45 degrees on a three-ton motor chassis, which also carries a powerful pump, driven by the engine. The tank is filled with water, which is drawn out by the pump and forced through a small pipe lowered to the bottom of the manhole to be cleaned.

The force of the water issuing from the nozzle of the pipe breaks and churns the sediment at the bottom of the manhole.

The liquid mud is then drawn by suction through a large, flexible hose to the tank and deposited there. The solid parts of the mud settle to the bottom at the smaller end of the cone, while the water is used again, in a similar manner, to flush three other manholes.

From time to time the accumulation of sediment or muck is removed from the tank by opening a trapdoor at the bottom.

The force of the water above quickly removes the mud adhering to the sides of the tank.

## Wheel Anchors Protect Autos in Transit

BY USING newly designed curved steel blocks to hold the wheels of automobiles while in transit, manufacturers claim to have reduced loading and unloading costs, besides practically eliminating claims for damages after the machines have reached their destination.



### How Loading Blocks Are Built

The loading blocks are made of pressed steel and formed to the curvature of the tires. They are fastened to the freight car floor by special nails that can be removed with little damage to the flooring.

In a recent test by an auto manufacturer a carload of automobiles anchored with these blocks was driven at a speed of 25 miles an hour against a string of 13 empty box cars with set brakes. So severe was the impact that the couple draft timber and one

end of the first box car were demolished, but examination showed the machines had withstood the shock without a trace of damage.

The blocks are 10½ inches high and weigh 10 pounds each. After the machines have been delivered, the dealer returns the set of eight blocks to the manufacturer at a cost of about 40 cents.

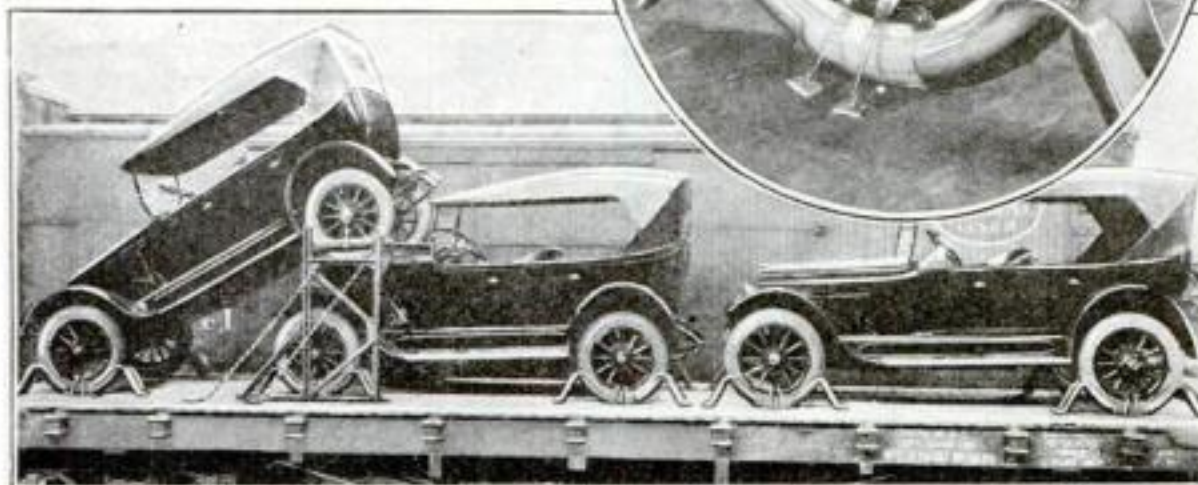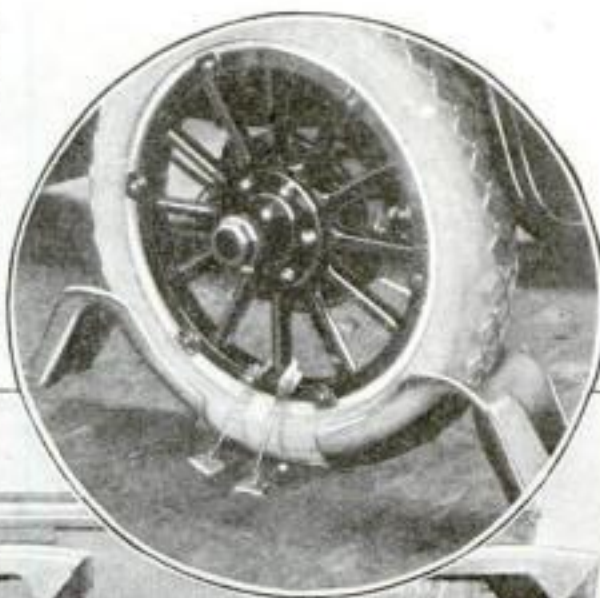

How automobiles are anchored to the floor of the freight car by steel blocks that fit the curvature of the tire as shown in inset



## Shackled Cow Can't Switch Her Tail, Nor Kick

WITH troublesome extremities securely shackled by a pair of steel cuffs, recently devised, the cow can't switch her tail at milking time, nor kick over the milk bucket.

The device consists of two clamps, one of which fits tightly around the gambrel cord just above the hock of one hind leg, the other around the tail near the tassel. The two clamps are connected by a short chain.

The Editor will be glad to supply, whenever possible, the names and addresses of manufacturers of devices mentioned in this issue




## Dump Trucks Climb Piles They Build

**I**N THE course of a big road construction job, near Carbondale, Ill., a problem of accumulating large quantities of material in a limited space, was solved by the superintendent in charge by a novel method in which trucks, as they dumped their loads, formed their own roadbed on which they climbed as the height of a pile increased.

He started the pile by dumping the material from big trucks and then placed wooden tracks on top. The trucks, backing up the track, dumped more



At the right: A truck dumping its load at top of pile after climbing the ingenious wooden tracks shown above

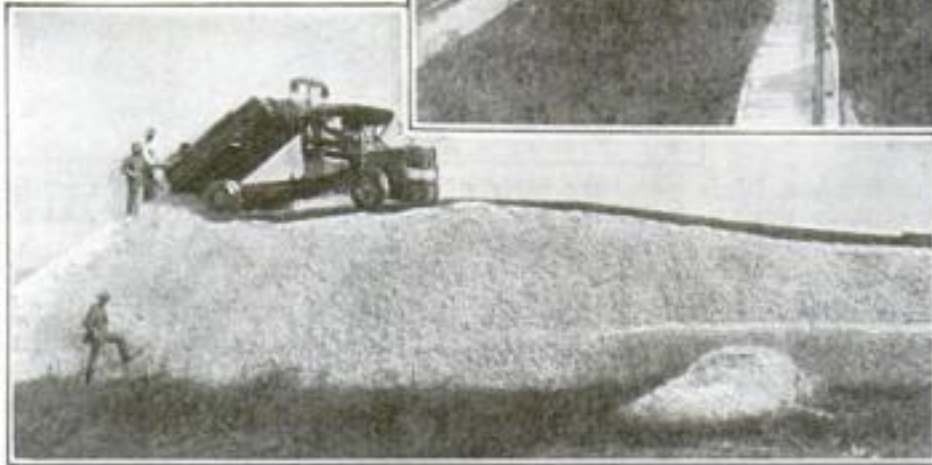

material, which in turn was used as the foundation for an extension of the track.

With the aid of these runways it was possible to build piles 100 feet long and 15 or more feet high.

Each track unit consisted of two 10-foot timbers, across which were spiked planks. On one edge of each runway unit a 4 by 4 inch timber was bolted down to form a guard.

## Tone Amplifier Improves Stringed Instruments

**F**OR the first time since the days of the great master builders of violins, an invention recently developed promises to bring a revolutionary improvement in the tonal qualities of any stringed instrument to which it is applied.

The device, which takes the place of bass bar and soundpost, consists of a long wooden strip carefully fitted and glued to the inside of the top board of the instrument, directly underneath the G string. To this strip a small sounding board is attached by two feet. This device may be attached to any stringed instrument.



Arrows point to the new sounding board, as placed under top of violin, and to piano sounding board



## Blindfolded, He Assembles Typewriter in an Hour

**T**O DEMONSTRATE his expert skill as a typewriter mechanic, F. R. Scroggins, of San Antonio, Tex., recently sat blindfolded at a table in a show window, with a typewriter before him, and dismantled the machine completely in 11 minutes and 15 seconds. Then, still blindfolded, he reassembled the machine in 56 minutes and 30 seconds.

To prove that the task wasn't difficult for him, he repeated the performance three successive times in a period of five hours.

Scroggins' remarkable feat demonstrated that repairing typewriters is one of the few professions in which the blind can find remunerative employment.

## Never Too Cold to Snow

**S**CIENTIFICALLY speaking, it's never "too cold to snow," says S. K. Pearson, Jr., of the United States Weather Bureau.

"We all know," he tells us, "that it snows in parts of Canada and in our Northwest when the mercury registers far below zero. Our worst blizzards have either commenced with a very low temperature or terminated with the mercury near zero."

## Beacons Built on Reefs Replace Old Towers

**N**EW standard lighthouses, consisting of a superstructure of iron mounted on a solid concrete base that can be placed

directly over a reef or other danger spot, are now supplanting stately towers of the past—towers that, while they were pic-

turesque, often were built miles away from the treacherous ledges they marked, and thus provided inadequate protection for shipping.

The new beacons, adopted by Uncle Sam's lighthouse service, are supplied with electric current by heavy cables from the mainland.

They can be built

quickly at small expense and are easily transported to any desired location. The modern lamps are so powerful that even without lenses, they outrange the older lights with their super-radiant reflectors and lenses.

In the past, the cost of building stone or metal framework towers has been excessive. The tremendous expense of setting foundations for high towers has frequently been responsible for placing them at a distance from the danger spots.

The present tendency is to guard the coastline by a number of lights placed at frequent intervals rather than by a few powerful lamps placed far apart.

Below: the oldest lighthouse in America, at Sandy Hook, N. J., built in 1884, and at right, the latest type beacon








### This Farm Gate Is Always Open to Motorists

FARM gates in certain sections of Florida are like railroad cattle guards, always open for an automobile or a man on horseback, but impassable to cattle or other animals with divided hoofs. The gate is made in the form of a grating of two-by-fours, 2½ inches apart, with the earth dug away beneath.

## Autoist Opens Garage Door from His Seat

WHEN Claire Briggs, the famous cartoonist, drives up to his garage at New Rochelle, N. Y., a pull on a handy chain outside the door opens the door for him without his moving from his seat.

A chain suspended from a bracket extending 10 feet from the wall passes over a pair of pulleys to a sliding door. Very little force is needed to slide the entire door to one side, as the weight of the door is carried on rollers, and the rollers are equipped with ball bearings.

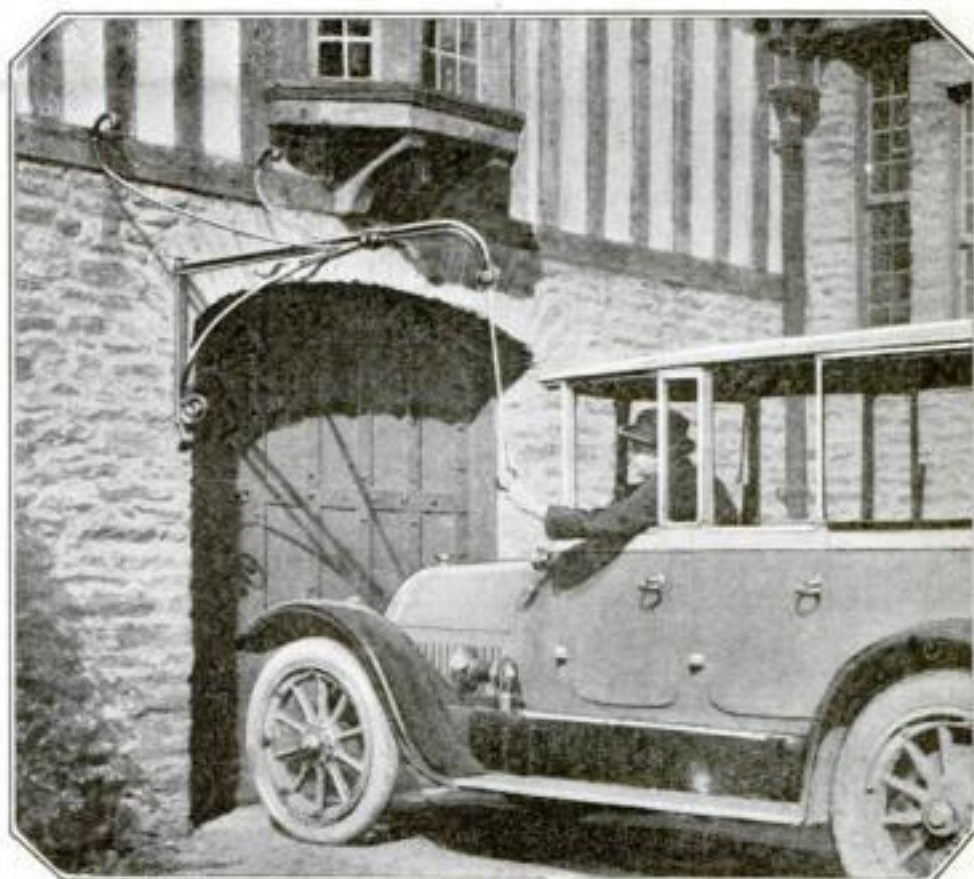

Courtesy Building Age  
One tug on the chain, and the door slides open


## Wheelbarrow Heated for Winter Work

AMONG the most useful recent additions to the equipment of a road repairing outfit, especially during the cold season, is a gasoline-heated wheelbarrow for handling bituminous road material.

Supported on a frame of steel piping are two steel trays, one above the other. The upper tray, with a capacity of three cubic feet, holds the material to be heated and transported. Immediately below, in a chamber



The heater for this winter-time wheelbarrow is beneath the material tray and is fed by pressure pump from a tank between the handles

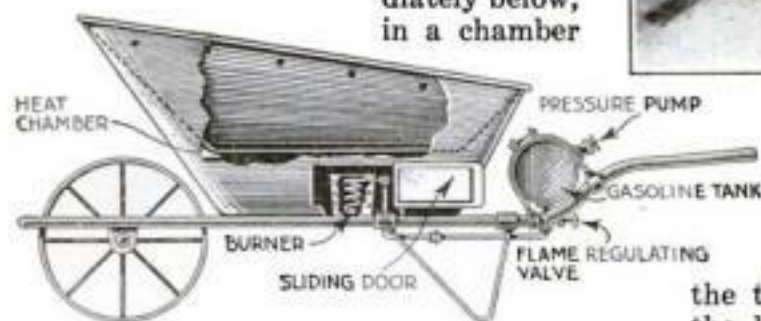

formed between upper and lower trays, is a gasoline heater.

Between the handles of the barrow is a cylindrical tank that holds two gallons of gasoline, enough to heat the material in the tray for 10 hours continuously.

A small pipe conducts the gasoline from

the tank to the burner and is admitted to the heating coil through a needle valve that regulates the supply of gasoline and hence the heat. A small air pump attached to the gasoline tank keeps the fuel under pressure. In the outer tray, openings for admitting air and for permitting the exhaust gases to escape are provided.

Material can be dumped without interfering with the operation of the heater.

WHERE is America's paper supply to come from after our pulpwood forests, now being shorn of timber at the rate of 100 acres a day, have been exhausted? Read, in next month's issue, the fascinating story of "henequen," the superabundant Mexican hemp, that is even now producing paper in commercial quantities.

### Cigarette Holder also Holds Ash Tray

FOR the protection of rugs from the ashes that cigarette smokers are in the habit of dropping, a small aluminum attachment has been invented that may be clamped to any cigarette holder, and is so light that its weight is hardly noticeable to the person who is using it.

It is in the form of a trough, closed at one end and clipped firmly to the end of the holder.



© K. & H.  
This tray catches all cigarette ashes


## How Sunken Steamer Was Floated by Cables from Shore

BY MEANS of a series of hydraulic presses exerting force simultaneously through a multitude of cables, the 8000-ton German steamship, Gneisenau, sunk on its side in the outer harbor at Antwerp, was pulled back into upright position recently and floated to drydock.

A trestle consisting of 12 iron levers was fitted to the portion of the port side remaining above water. To these levers were attached 48 steel cables terminating at the shore end in 12 hydraulic presses having a total capacity of 3000 tons. A system of balances enables the engineers to make the 12 presses act simultaneously.



Pulled by hydraulic presses, cables attached to a trestle of levers fitted to the exposed side of the sunken ship, raised the vessel to an upright position

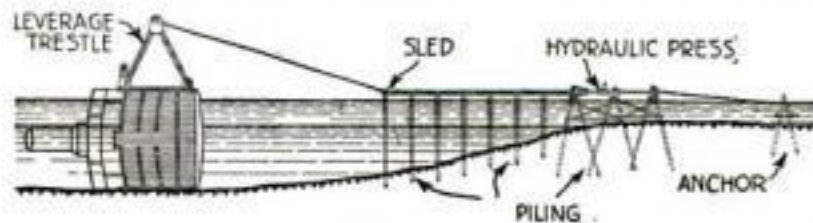



## Tractor Scraper Shaves Ice for Skaters in Chicago Parks

**I**CE on the lakes in Chicago parks will be shaved smooth for skating this winter by a scraping machine of novel design, drawn by a small tractor. The machine, driven by a gasoline engine, is mounted on a V-shaped frame, attached to the tractor by a stiff bar bolted to the apex of the V. Each of the two arms



Mounted on a V-shaped frame and hauled by a tractor, nine motor-driven rotary cutters shave all bumps from the ice

of the V is supported by a wheel.

The frame supports nine rotary cutters with horizontal blades that rest directly on the ice and are rotated by worm-gear transmission from the gasoline engine. It is expected that this machine will do the work heretofore done by 10 teams of horses.

## New Transmission Lock Safeguards Ford

**M**AKING it impossible for a Ford to be started or moved under its own power, and yet permitting the car to be moved by hand in case of a fire or other emergency, a new transmission lock affords the protection against theft hitherto enjoyed only by owners of expensive cars.


The lock is screwed on in place of the original cover of the transmission case, and its keyhole plate comes just above the floorboard, where it is easily reached from the driver's seat. When the key is given a quarter turn, the teeth of a steel arm connecting with the lock project and engage with slots in the gear ring of the fly wheel. This prevents the power plant from being turned over. At the same time, a second arm on the lock turns crosswise under the edges of the transmission case opening, so that the lock cannot be unscrewed and removed.

In the unlocked position, the toothed arm is held firmly to the rear, and cannot engage the gear ring while the engine is in motion, or until the proper key is used.

The lock may be installed quickly.



When the key is turned as at left, a toothed arm engages and locks fly-wheel

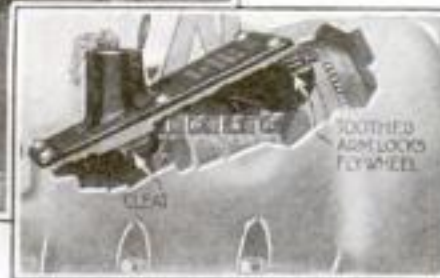

## Warming Pad Heated by Chemicals



**C**HEMICAL action, instead of hot water or electricity, warms a heating pad of recent invention. The heat is produced by adding a small quantity of cold water, not more than one ounce, to chemicals contained in a stout canvas bag, which is inclosed in an outer bag.

The bag containing the chemicals and water is vigorously shaken and in a few moments the temperature rises to a maximum of about 200° F. If properly protected, the bag will remain hot for 24 hours.

## First Aid Outfit Fastens to Car or Motor Boat

**F**IRST aid outfits containing a selected assortment of medical supplies likely to be needed by the tourist and camper, can be purchased compactly arranged in a metal cylinder that is held rigidly in a bracket screwed to any convenient part of the automobile, motor boat, or camp wall.



The complete outfit

The aluminum tray, 3 5/8 inches in diameter and 11 3/4 inches long, contains cotton, bandages, needles, matches, caustics, plasters, and numerous other first aid requisites in addition to bottles for antiseptics and cleansing solutions. The ends of the tray are closed by two cups.

## Cattle Nose Prints, All Different, Identify Blooded Stock



Above is typical cattle nose print, obtained by pressing paper over the animal's inked nose

**A** SYSTEM of animal identification, evolved at the University of Minnesota under the direction of William E. Peterson, has shown in actual practice that nose prints of cows, calves, and bulls are as reliable for identification purposes as finger prints of human beings. The idea was devised principally to safeguard valuable blooded cattle entered for exhibition at shows.

The method of taking the nose prints is extremely simple. After the perspiration is wiped off the animal's nose with a flannel cloth, ink is applied to the nose with a stamping pad. The im-

pression is made by rolling a piece of newsprint or mimeograph paper backed by a small board over the nose of the animal, beginning at the base of the upper lip.

Careful comparison shows that no two prints of different animals were exactly alike. It is also true that the markings on the nose of an animal do not change in pattern, although they become larger with age. This method is believed to offer a positive means of identification, of particular importance in preventing substitution of pure bred stock.



## Farmer-Sculptor Carves Statues from Hillside

**ALTHOUGH** Daniel Brice Baughman, a farmer and undertaker of Black Run, Ohio, never has had a lesson in sculpture, he has chipped for more than 20 years at the limestone that he quarries out of the high hill upon which stands his home.

Now, at the age of 45, he has laid out on this hill a memorial park, dedicated to great



With chisels forged by himself the farmer-artist carves statues in limestone



Americans and the veterans of our wars. In this park are his statues of Washington, Lincoln, Garfield, McKinley, McPherson, Grant, Sherman, and "The Doughboy."

Baughman not only quarries his own stone, but in his own forge makes the many chisels with which he shapes the stone. He sets up the huge stones in the rough and puts on the final touches from a scaffolding. Then he paints them white, so that they stand out like marble.

## Automatic Welder "Sews" Metal Seams

**WITH** an ingenious welding machine recently developed, metal parts are welded together automatically in curved or straight seams, in a manner closely resembling the sewing of a seam on a sewing machine.

The welding machine has two torches—a

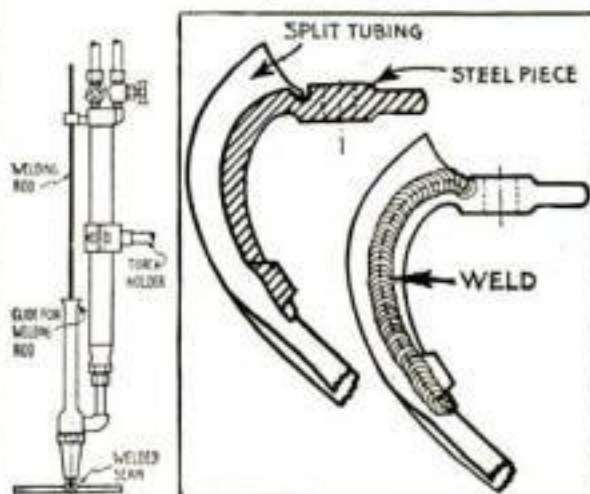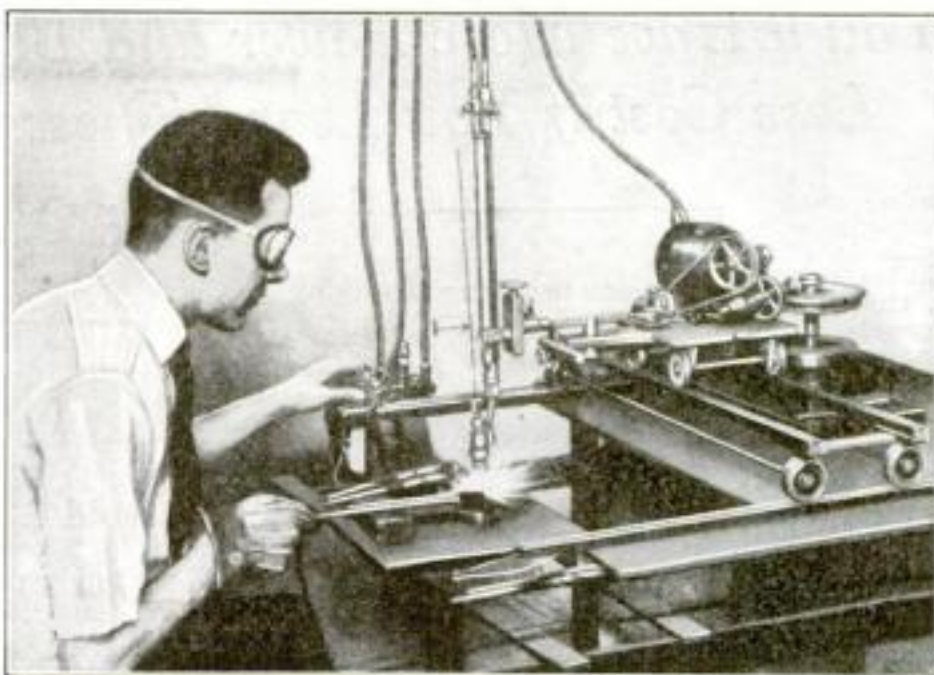

Above, an operator at the automatic machine, welding a drop-forged steel piece of varying thickness to a curved piece of split tubing of uniform thickness, as in diagram at left. Note that the line of welding is an irregular curve. Diagram at the extreme left shows arrangement of parts of the welder

motor and the mechanism propelling the carriage along its track.

The track frame also rests on wheels that run on a track at right angles to the track of the carriage. This arrangement makes it possible to move the torches along any straight or curved line, in any direction, if guided by a fiber template.

Both torches are independently adjustable as to heat, height and inclination, and the progress of the carriage along its track can be controlled with accuracy by the operator. The rotary motion of the welding torch can also be regulated by changing the friction drive and the eccentric.

## Three-Inch Radio Set Has 25-Mile Range



The designer, Frank L. Copeman, receiving with his compact set, shown in detail at right

**WITHOUT** sacrificing clearness of tone and wave capacity, Frank L. Copeman, of New York City, has perfected a remarkably compact and neatly designed radio receiving set. By a patented method of multiple coil winding he has succeeded in confining the switch controlled tuning unit into a small space without destroying its selective qualities.

Although arranged primarily as a crystal detector set, the tuner can be used in a vacuum tube circuit. Speech and music are clearly received within a radius of 25 miles of a broadcasting station. In fact, it is claimed that the baby set is more effective than many larger instruments.

The outfit, exclusive of phones, is three inches long, two inches wide, and two inches high—so small that several of them could be held in one hand.



## Shield Guards Shaver of Dictating Records

**TO PREVENT** flying pieces of wax dictating machine cylinders, broken while being shaved, from injuring the operator, M. G. Hoyman, of Neenah, Wis., has invented a new safety guard.

The guard is a plate glass shield that may be adjusted by means of two pivoted telescoping arms.


In three minutes' time the guard can be fastened to the bed plate of the shaving machine by removing two bolts that form a part of the machine and inserting the same bolts through the base of the guard.



# How to Tune Up Your Car and Save Money

*You'll Have More Power and Better All Around Performance at Less Cost if You Learn These Lessons from the Race Driver*

Assuming that 10 horsepower is available at 20 miles an hour, the running gear of the untuned car absorbs seven horsepower

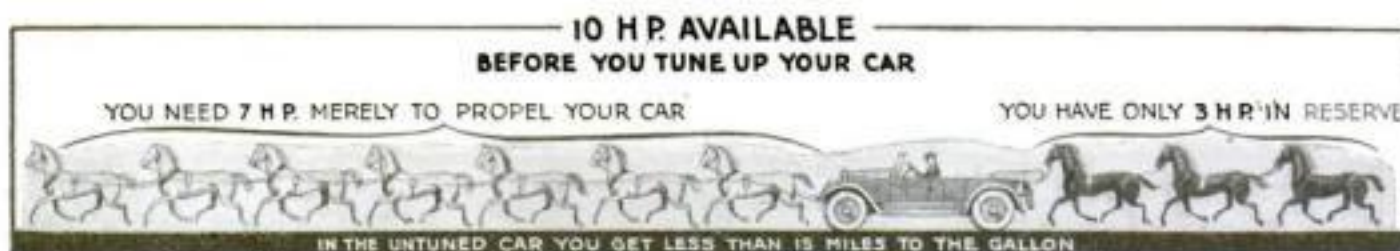

Only three horsepower remain for acceleration and hill climbing. Note, below, how the dark horses increase as the car is tuned up

**I**F YOUR car labors on the hills; if your engine lacks "pep" or your car lacks "kick;" if your gasoline bills are too high or your tire mileage too low; if you are getting too little fun out of your car at too great cost; or if it is not as reliable a business utility as you expected:

You should hearken to the methods of the race driver, because he is a super motorist. Most of the things he does to squeeze a heartbreaking maximum speed from his fleet mount, may be applied with almost equal effectiveness to make your own car

By Harold F. Blanchard

course will not only produce the greatest speed possible, but it will give maximum hill-climbing ability, maximum economy, and maximum reliability. Incidentally, the liveliness of the car will be increased to a surprising degree.

This quality of car energy commonly called "pep," like hill-climbing and speed prowess, depends on the amount of reserve power available. If you are running 20 miles an hour, the rate at which you can

enough to require four horsepower, you must shift to second.

Now let us assume that by putting your engine into racing car condition its horsepower development at 20 miles an hour is raised to 15. With the running gear still absorbing seven horsepower, there is now eight horsepower available for acceleration or hill climbing. The reserve power has been nearly tripled by merely improving the condition of the engine.

Next, assuming that by giving careful attention to the running gear and tires, the



Tuning up the engine to develop 15 horsepower—with running gear still absorbing seven horsepower—gives you eight horsepower in reserve

Finally, with running gear tuned up to absorb only three horsepower, your car is in perfect trim, with 12 reserve horsepower for acceleration and hill climbing

physically fit. Tune up your car as he tunes up his and it will glide smoothly up the steepest hills; fuel, oil and repair bills will be noticeably reduced; the car will last longer and breakdowns will be almost wholly eliminated from the sum of your automobile experiences.

If a race driver, by a deft touch here and there, can increase the speed of an ordinary touring car from 45 to 75 miles an hour, there is no good reason why the average automobile owner, once he has mastered the few important secrets of power saving, cannot raise the tune of his car to that same 75-mile pitch, gaining the additional 30-mile speed that means motoring perfection, and reducing repair and maintenance costs to a minimum.

## No Mystery Here

There is nothing mysterious nor difficult about the methods of the race driver. Any motorist may apply them to his own car with success without spending too much time or effort.

First, the engine must be tuned up to give its maximum power; then all friction losses in engine, chassis, and tires must be reduced to the limit. Such a

accelerate your car depends on how much reserve power is available at this speed. Suppose that at 20 miles an hour your engine develops 10 horsepower with the throttle wide open, and that of this amount the running gear, including tires, consumes seven horsepower. That leaves three horsepower for acceleration. It also means that the steepest hill you can climb on high gear is one that will absorb not more than three horsepower. If the hill is steep

power absorbed at 20 miles an hour is reduced from seven to four, the reserve horsepower is increased to 11, or nearly four times as much as was available originally.


These figures are by no means exaggerations. They merely prove how much is to be gained by a sensible application of race driver methods, which I shall endeavor to describe to you in detail.

The speed of the racing car mentioned at the outset was raised first from 45 to 60 miles an hour by putting the engine in good condition, then was increased again to a 75-mile pitch by minimizing frictional losses.

## First, Grind the Valves

Obviously the first step in tuning up the engine is to grind the valves and remove the carbon. Then adjust the valves, allowing .006 inch clearance for the exhaust and .004 for the intake. Any weak valve springs should be replaced.

On a racing car the spark would be timed so that with lever retarded the breaker points of the interrupter that break the spark connection would begin to separate when the piston, on the

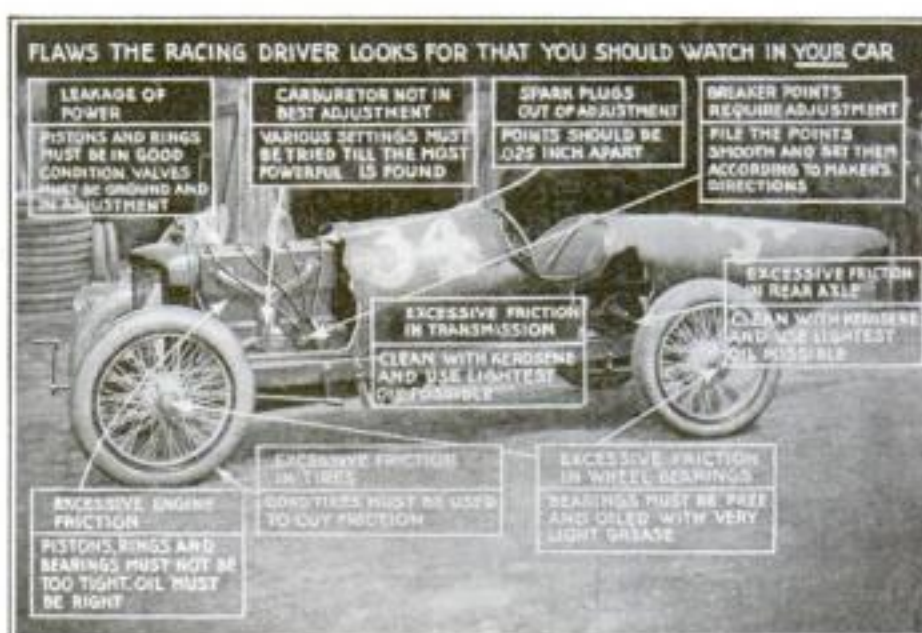

Here are the enemies of speed and "kick" that the race driver tackles when he "tunes up" for a speed contest. Any automobile owner can profitably follow his methods



compression stroke, is half an inch below top dead center; but the average driver will be best satisfied if the points break just as the piston reaches top center. A car with a late spark will fail to develop full power, even if the lateness is not sufficient to cause overheating. The breaker points should be smooth and should meet squarely. Their adjustment should exactly conform to the recommendations by the manufacturer.

### Watch Your Ignition

The battery should be strong, the coil and condenser in the best condition, the distributor clean inside and outside, and the high tension wiring well insulated. If the insulation is old or rotted, new wiring should be installed. High tension ignition current leaks readily and any leaks will prevent hot sparks at the plug points.


The spark plugs should be clean and the points set accurately .025 of an inch apart. This distance is approximately three eighths of a sixteenth of an inch, or half the thickness of a new dime.

The friction generated by pistons, rings and bearings is an extremely important item of power absorption to the racing driver. He fits pistons, rings and bearings somewhat loosely to minimize friction and eliminate the danger of these parts binding at excessive speeds. To compensate for the loose fit, he uses heavy oil. But heavy oil causes carbon to accumulate quickly in the cylinders and therefore is not suited to the needs of the average car owner. The lighter the oil, the less the carbon deposit. It is best, in the long run, to use oil recommended by the manufacturer, and to change it frequently—at least every 500 miles.

### That Pesky Carburetor

The pistons should work freely and the rings should not press too heavily against the cylinder walls. Whenever new rings are installed, it is well to see that they offer a minimum of friction, and that the bearings are not drawn up too tightly by the repairman.

In carburetor adjustment, it is a good idea to remove the carburetor, clean it thoroughly and then install a gasoline filter in the line, to eliminate trouble with dirt and water in the fuel. There is a tremendous difference—as much as 25 per cent—in the way any carburetor will serve different engines. If you think that your present carburetor is not satisfactory, before trying another make, be sure that the one you have is in the best of condition and in good adjustment. You will save needless expense.

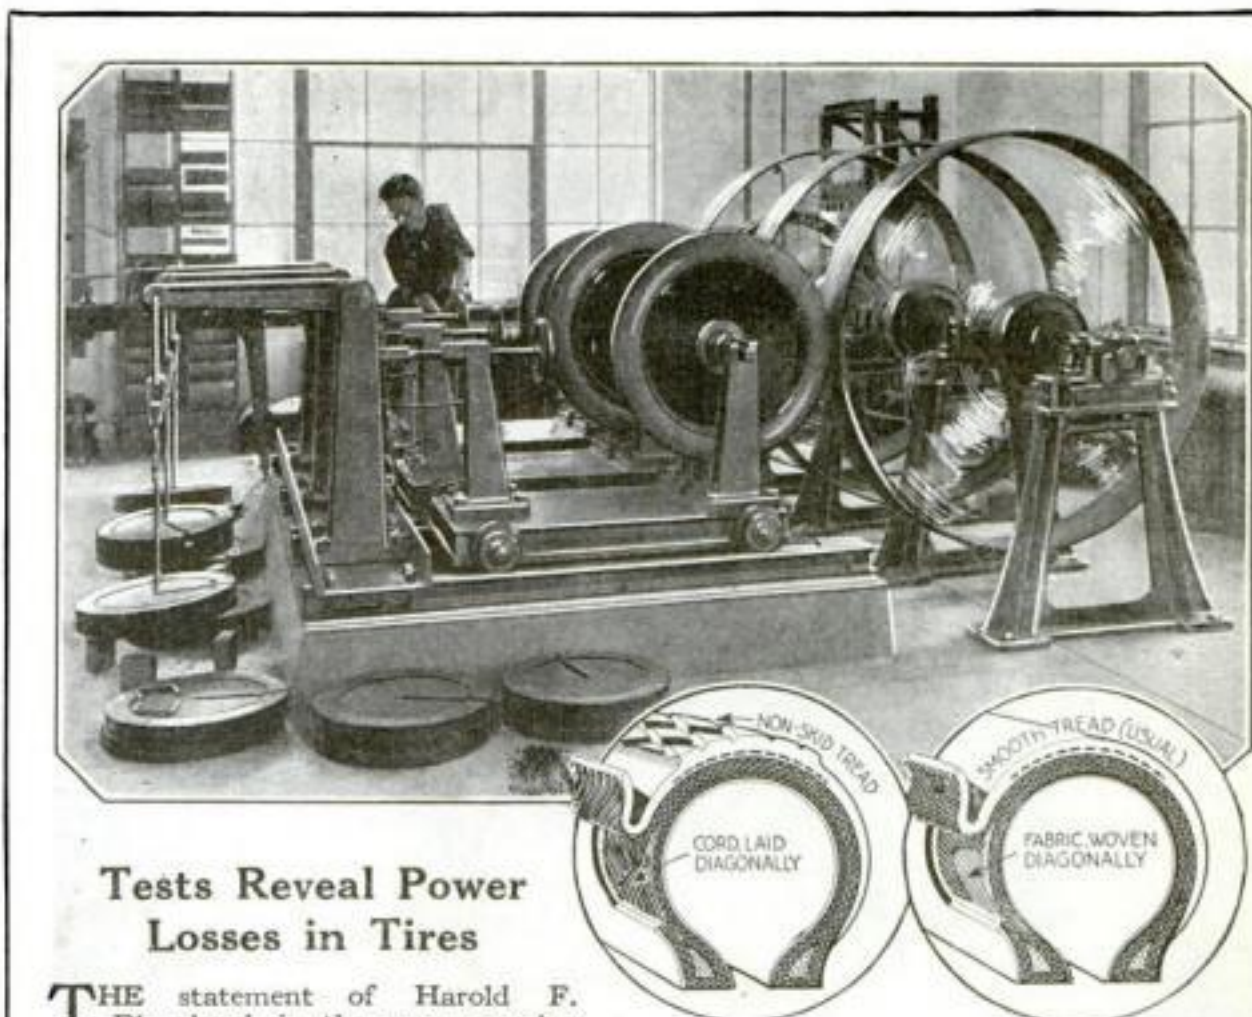

### Tests Reveal Power Losses in Tires

THE statement of Harold F. Blanchard, in the accompanying article, that power consumption of a cord tire is less than that of a fabric tire, is interestingly corroborated by remarkable tire tests recently completed by the United States Bureau of Standards in its laboratory at Washington, D. C. In these tests, which conclusively demonstrated that cords absorb a third less power than fabrics, the tires were subjected to friction in an ingenious machine (shown above) that duplicated normal road conditions. Construction of the two types of tires is shown in the inset.

For the tests, each tire, attached to an electric dynamometer, is pressed into contact with a pulley driven by a 10-horsepower electric motor. The surface of the pulley corresponds to a smooth macadam

road. By increasing the speed of the motor, the tire can be rotated at a speed equal to that of an automobile traveling 50 miles an hour.

A close approximation of the lost power is gained by computing the energy input to the pulley motor and the energy output of the dynamometer. Since the efficiency of the two electric motors is known, the energy loss is the difference between the two figures.

An average four-inch fabric tire under normal load and air pressure, was found to absorb approximately nine tenths horsepower at 25 miles an hour. Under similar conditions the power loss in a cord tire was six tenths horsepower.

The column of air sucked into the engine through the carburetor and through the tortuous passages forming the intake manifold may be compared with an endless elastic rope. If the sides of the manifold are rough, it is clear that the rope cannot be pulled in as fast as if the sides were smooth. Therefore the intake and exhaust passages of a racing engine are scraped as smooth as possible. Car owners who will go to this trouble will discover at once an increase in power production at maximum engine speeds.


New pistons should be of light cast iron

or of aluminum. Light pistons not only reduce vibration, but reduce pressure on the cylinder walls and bearings.

In tuning up the engine be sure that the spark advance mechanism works and that when the accelerator pedal is pushed all the way down, the throttle is fully open. Sometimes the extreme movement of the accelerator pedal brings the throttle past full opening to a slightly closed position.

The clutch should not slip, even slightly. If it does, wash it with kerosene if it is a dry disk or plate type, and if this does not cure the trouble, adjust it. If the clutch is

## Five Secrets of Car Tuning that Add to Reserve Power

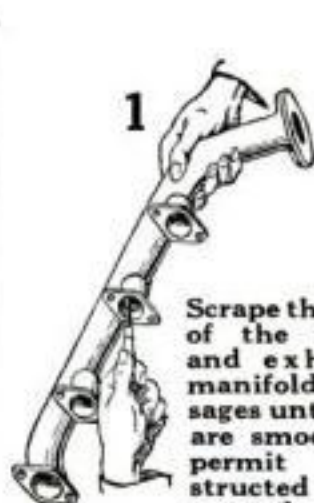

1 Scrape the sides of the intake and exhaust manifold passages until they are smooth, to permit unobstructed passage of air into the engine




2 Grind the valves, remove the carbon, and adjust carefully



3 After cleaning transmission with kerosene, fill gearbox half full of lubricating oil



4 Set spark plug points apart a distance of half the thickness of a new dime

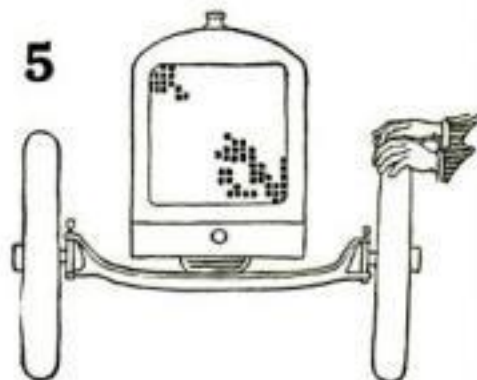

5 Set wheel bearings so that, when shaken, they will have about one sixteenth inch play




# How to Keep Your Car at 100 Per Cent Efficiency



**T**O PREVENT the door pocket—the handiest place to carry automobile tools—from tearing away from the wooden crosspiece that forms its base halfway up the door, fasten the pocket with a row of carpet tacks, spaced about an inch apart. The tack heads can be concealed by tapping them into the beading of upholsterer's tape



**S**QUEAKY brakes can be remedied, without danger of lubricating the brake drum, by the use of fullers' earth. To apply, shake fullers' earth in gasoline, and before the fine powder settles, squirt it between the band and the drum with an oilcan

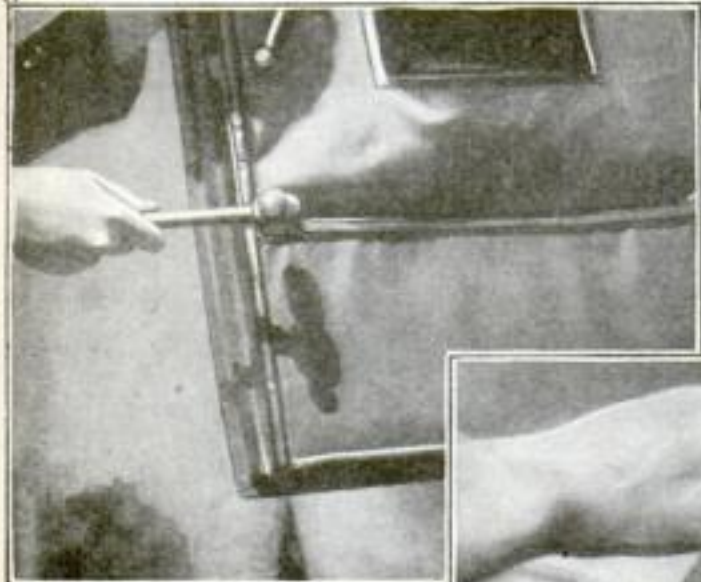

**T**WO spares are held on one tire carrier by a simple iron extension driven between the rim of first spare and tire carrier. Near the outside end of the extension, which projects far enough to support the second spare, shown in phantom at the right, drill a hole to receive the valve. Strap the tires together

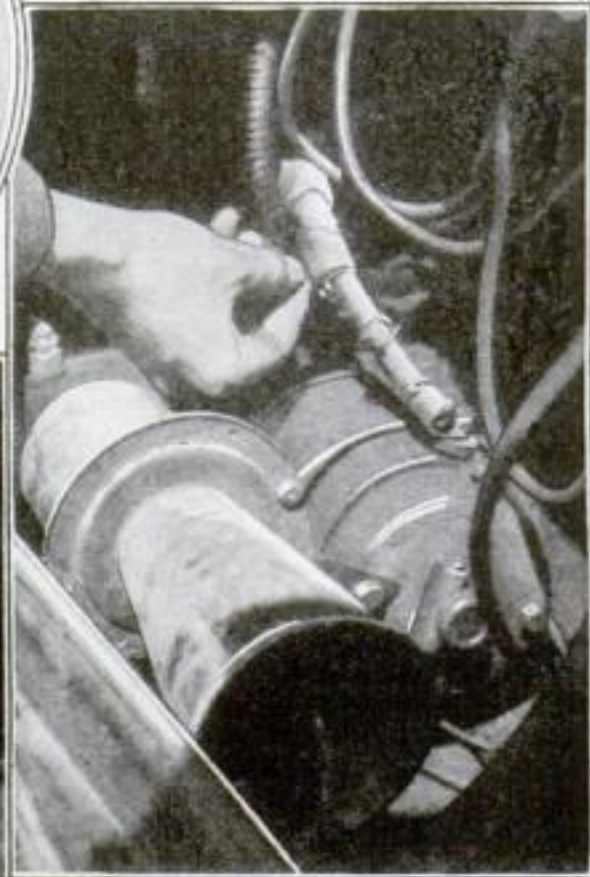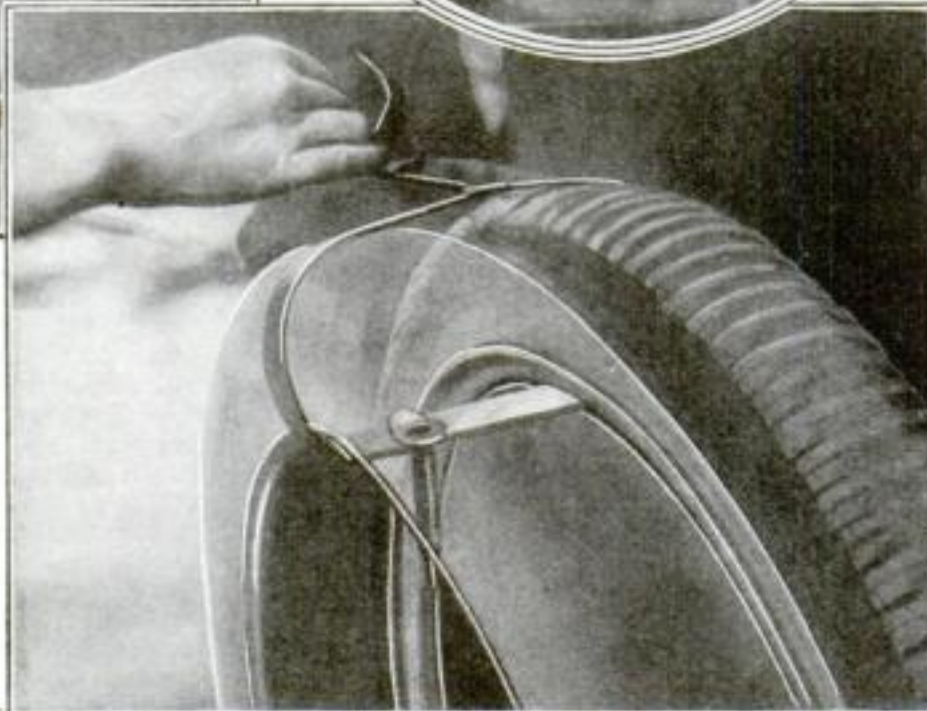

**W**HEREVER the starter cable rubs against a metal part, wearing the insulation, bind a short twig to the cable

a cone, dust fullers' earth on the facing if it seems too oily, and adjust if necessary. A metal to metal multiple disk clutch that slips may be cleaned with kerosene and then covered with a lubricant consisting of a mixture of one part kerosene with one part cylinder oil.

The transmission should be drained, cleaned with kerosene, and partly filled with ordinary engine lubricating oil. If this leaks out, use a heavier oil. Treat the rear axle in the same way. If the lubricant leaks out around the wheels, the trouble usually may be eliminated by putting only enough oil in the axle to permit the big bevel gear to dip well into it. The wheel bearings should be lubricated with a very light grease.

The wheel bearings, if adjustable, should be set so that the wheels, when shaken, will have about one sixteenth inch play. Be careful, however, not to confuse this play with play in the steering mechanism. The rear wheels should spin with perfect freedom. Dragging brakes can be remedied by careful adjustment, according to the manufacturer's directions. If the brakes fail to release readily, joints may be rusted or it may be they require oiling. Possibly some of the release springs may have lost their strength, broken or fallen off. In some cases it is advisable to install heavier springs, anchoring them to some

convenient point on the chassis by three sixteenth inch wire. If contracting brakes are used on the rear drums, be sure that the small release spring located at the point where the band is anchored to the axle is in working order. Sometimes the screw at

varies with the tire. A few years ago one of the big tire companies produced a cord tire with smooth tread designed especially for racing. Actual tests by racing drivers on the wooden saucer at Sheepshead Bay, New York, proved that these tires on an automobile traveling 100 miles an hour were four miles an hour faster than other tires. Since approximately 100 horsepower is required to propel a racing car at this rate, it was estimated that the saving effected by these tires was equivalent to eight horsepower.

Every man in the racing game knows that power consumed by cord tires varies with the tire, but that the power consumption of the cord tire is always less than that of the fabric tire; further, that a tire pumped to 10 pounds in excess of manufacturer's rating absorbs less power than one with less air pressure.

The racing man's steering gear is always well lubricated and in good adjustment. The nuts are always tight and the cotter pins in place. Steering gear should get close attention.

Keeping your car in racing-car tune saves fuel bills and tire and repair expense. The car will wear longer because its parts are systematically lubricated. Once the whole car is "right," it is easy to keep it that way. And that is the way that gives the greatest satisfaction and economy.

## Know Your Car

**H**AVE you ever asked yourself just how thoroughly you know your car and its ways? Do you realize how much greater mileage you could get for the same cost if you gave your car something like the care that the racing driver gives his? The racing driver not only tunes up his engine to give a maximum power output, but he also adjusts each detail of his car, so that the amount of power that it absorbs is at a minimum.

The difference between power produced and power absorbed is the power that is available for speed—that is, the power that is available for overcoming wind resistance. It is comparable to the business man's profit. You can take that profit on your own car just as easily, if you know how to give it the attention it deserves.

The series of remarkably helpful articles by H. F. Blanchard, appearing in these pages every month, is helping hundreds of readers to increase their pleasure in motoring, while decreasing the expense of running their cars.

this point needs adjusting. Even if the brakes drag only slightly, they will noticeably retard the car.

Tires, when pumped hard, roll with less friction. The amount of power consumed



# Novel Automobile Robe Unrolls like Window Shade

*Ten Other Useful Inventions for Car Owners*



This movable auto seat for the baby is hooked detachably to the robe rail in the back of the seat by means of two curved metal straps




Long strips of rubber sponge may be used to advantage for cleaning the varnished or enameled parts of an automobile. Fold for packing



This automobile robe is pulled from its case like a roller shade and fastened. When released, a spring winds it around its spindle



For pouring oil, the attachment shown above, bolted to the manifold yoke, takes the place of a funnel

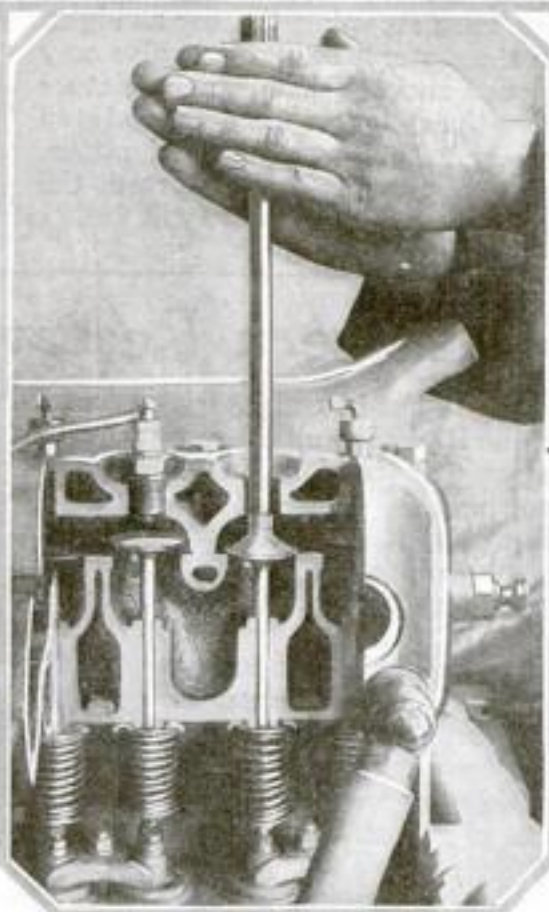

For lifting the valve from its seat while being ground, this long-handled suction cup holds up valve head



A novel dust arresting device, described in diagram, replaces the usual hot air pipe on the Ford, as shown, lengthening engine's period of usefulness



This steel strap, incased in leather and with a stout lock, will safeguard the tools in your seat chest



Installed at the base of water jacket, this electric heater keeps the engine from freezing



With six setscrews attached to the outside of the hub, this powerful screw, operated by a crank handle, enables one person to pull the tightest wheel



The auxiliary tank shown above is triangular in cross-section and, when covered, makes a good footrest



A new volt checker for storage batteries has two fixed contacts operated with one hand



## Primer Made for Less than a Dollar

WITH the first cold mornings, the motor-car owner begins to feel the need of some kind of a priming device to assure the quick starting of his motor. Probably the best system is one that provides for injecting gasoline into the intake manifold as near the cylinder block as possible, and preferably it should be operated from the dash.

For less than a dollar any one can fit such a primer to his motor, if it has a vacuum gasoline system. The vacuum tank is connected with the intake manifold by a copper tube.


Obtain two solderless tees of the proper size to fit the intake tube that carries gasoline from the vacuum tank to the carburetor as well as sufficient flexible metal tubing to reach from the manifold to the dash and back to the gasoline line. A small shut-off valve to fit this also should be purchased.

Cut the tube running to the manifold

By G. W. Greene

as far down as convenient. Fit in the tee, with the additional tubing running from it, and place the shut-off valve conveniently on the dash. Then, by means of the other tee, connect this tube with the gasoline line between the vacuum tank and the carburetor. The gasoline may be shut off while doing this by means of the shut-off valve on the bottom of the tank, or the tank can be emptied.

To use the primer it is necessary only to open the valve on the dash, allowing the suction of the motor to draw the liquid gasoline into the manifold. The best results can be obtained by opening the valve in the primer when stopping the car at night. When the motor is idling, the valve may be opened and the heavy rich mixture entering the cylinders will flood and stop the motor. Then turn off the ignition. When the motor is again started, the rich mixture in the cylinders will fire.

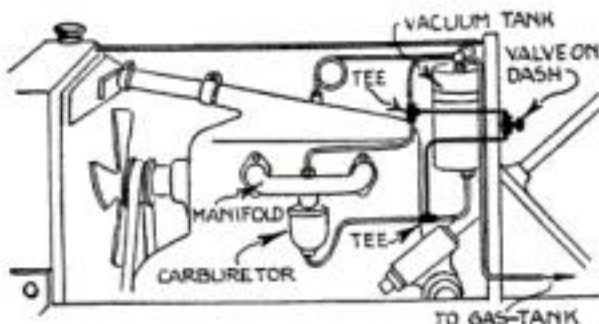

Valve on dash makes it easy to provide rich starting mixture

## Asbestos Tape on Manifolds Conserves Heat in Winter

HEAT is the one necessary thing to turn raw gasoline into power. The illustration shown herewith explains a very simple aid to breaking up the fuel by wrapping both the inlet and exhaust manifolds with woven asbestos tape. This utilizes the waste heat of the exhaust pipe to heat fresh, cool, incoming gases.

Procure a quantity of woven asbestos tape at any automobile-supply house and wrap both as indicated. The asbestos, being a non-conductor of heat, confines the heat to the exposed surface of the intake.

Every motorist will agree that 90 per cent of starting troubles are caused by condensation of gasoline in the inlet manifold




Warm air passes from exhaust pipe to intake manifold

in cold weather. The tape is wound neatly, one strip overlapping the other, so as to form a solid wall to keep the warm air in and the cold air out.—RONALD L. PRINDLE.

## Raising Spark Plug Prevents Formation of Carbon

GO TO any hardware store or plumbing shop and buy  $\frac{1}{2}$ -in. male and  $\frac{1}{2}$ -in. female fittings. Put on plenty of shellac and screw in top of the cylinders in place of the spark plugs, then shellac your plugs and screw in the fittings. This raises the plugs in the fittings and protects them from the splash of the oil and the carbon from gasoline.



Keeping the spark plug clean means less engine trouble

I tried the above on my Ford and never had any trouble with dirty plugs. I believe it also gives more power to the engine. Be sure that the fittings are screwed on tightly.—EARL E. MOORE.

## Tool Made of Old Piston Ring Cleans Grooves

IN FITTING new rings to old pistons it is highly essential to clean the piston ring grooves of carbon and other accumulations. Otherwise, the new piston rings will not work properly because their freedom of movement will be restricted by the dirt in the grooves.



A useful homemade scraper

An excellent tool for thoroughly cleaning the grooves can be made from an old piston ring, a section of which is ground to a chisel edge and mounted in a handle.—H. F. B.


## To Insure a Reserve Supply of Gasoline

YOU will not be caught without gasoline if you install the reserve device, illustrated at the right, in your auto or motor boat.

The plug at the tank outlet must be large enough to take the  $\frac{1}{4}$ -in. holes for the seamless tubing. One tube extends into the tank about 3 or 4 in. so that the gasoline below it cannot be used unless the reserve cock is turned on.

The amount of the reserve can be found by pouring into the tank known quantities of water or gasoline until it starts to run out of the pipe extending into the tank.

Solder all connections except at the union and where the plug screws into the tank.—HENRY S. LARABY.

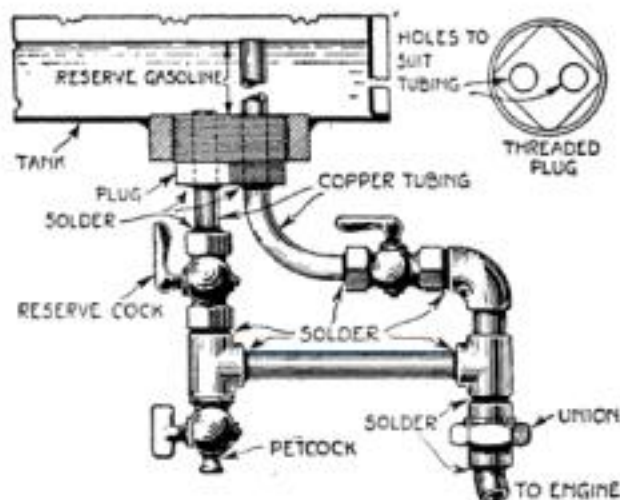

Emergency supply of gas is made available through reserve cock



## Mirror Aids Night Repairs on the Automobile

OFTEN when there is no trouble light at hand for making emergency automobile repairs at night, a mirror can be used in conjunction with the spotlight to illuminate practically any part of the car. The spotlight is focused on the mirror, by which the light is reflected to the spot where it is desired.—L. G.

## File Marks Identify Spark Plug Leads

ANY one who has been unfortunate enough to crank an engine on which the spark plug wires were misplaced, will appreciate the value of the suggestion that spark plug terminals should be marked to correspond with cylinders of the engine. This method is used by a Washington, D. C., tractor owner and is found advantageous because of the frequent necessity for changing and cleaning plugs.

A V groove for No. 1 cylinder, two nicks for No. 2, and so on for all the leads, are made with a triangular file and will aid in reassembling.—G. A. LUERS.



Marks correspond with cylinder





# The Home Workshop

New and Useful Things to Make with Tools

## How to Make a Tea Wagon at Half Store Prices

EVERY woman who entertains, no matter how infrequently, wants one of those attractive tea wagons that are becoming increasingly popular in well furnished homes, serving often as informal luncheon tables. Not only are they ornamental, but they also save steps in carrying food from kitchen to dining room and in clearing the table after meals.

### Exercise Care in Building

To make a tea wagon in your home workshop costs considerably less than to buy one, and if sufficient care is taken with the design, workmanship, and finishing, the one you build is apt to have the charm and distinction that give value to handmade furniture.

Success in building a tea wagon or any similar piece of furniture depends largely on having a good design and an adequate drawing or layout from which to work. For that reason the Home Workshop Department has prepared a blueprint giving additional details of the tea wagon the construction of which is described and illustrated in this article. This tea wagon combines the best features developed by furniture designers, simplified in construction as far as possible for the home worker who must rely almost entirely on hand tools.

### A Handsome Piece of Furniture for Your Home or a Useful Christmas Gift



A tea wagon of charming design and relatively simple construction, described in the accompanying article, for which additional working details are contained in Home Workshop Blueprint No. 13 (See pages 90 and 91)

wagon, designed for the blueprint service. Commercial tea wagons do not vary a great deal in size, although the cheaper ones are often a trifle small and light. It is not the size so much as the design, material, and workmanship that influence the cost of manufactured tea wagons. They range in price from \$20 or even less, but the average well built tea wagon costs between \$30 and \$40. An inlaid mahogany table, somewhat similar to No. 5 below, is listed in a New York department store for \$90. The difference in the cost of material between a cheap and an expensive tea wagon is not a great deal, so it will pay the man who wishes to make one to work up one of the better models, which he can do at less than half the store cost.

### Describing Some Wagons

The design marked No. 1 is a novel and interesting variation in that the corners are cut off and the legs sawed from  $\frac{1}{2}$ -in. stock, set at an angle. This displays well the distinctive profile of the legs without the appearance of thinness that would result if they were parallel with one of the main axes of

the wagon. The leaves are rectangular in general shape, but have the outside corners cut off at an angle to harmonize with the top.

Number 2 is a little heavier tea wagon with 8 light, straight legs, each pair being set back a trifle from the corner. The small blocks at the bottom and top form a sort of base and capital for them. The middle shelf has the corners cut off between the legs, but the lower shelf is rectangular, like the top. This tea wagon has a wooden handle, and the tray has metal handles.

### The Simplest Model

In No. 3 is illustrated the simplest and easiest model of them all. Two frames are made for the sides and two for the end, and the four are then fastened together with glue and brads. Cove-shaped corner blocks are used to

(Continued on page 90)

### A Wide Choice of Designs

Since this is a strictly conventional tea wagon of the more expensive type, the general dimensions and constructive details, many of them full size, can be used as a basis in making innumerable changes in design. For instance, the legs may be turned or straight, the leaves or tray may be omitted, and the handle may be of wood or metal, or a combination of both; the wheels may be purchased, turned, or cut out with a saw. Any number of these variations will be suggested in the accompanying illustrations and following text.

The general dimensions and construction are well illustrated on page 90 in the side and end views of the tea

Any one of the nine handsome types of tea wagons shown herewith may be made as a variant from the Home Workshop's fundamental blueprint design





The following article contains specific instructions for installing fuel saving improvements in your heating plant, as recommended last month in a survey of the house heating problem

## How You Can Improve Your Home Heating Plant Cut Coal Bills by Better Distribution and Conservation of Heat

By James S. Godfrey


**I**N MANY ways the home worker can make improvements in his heating plant and his house that will repay themselves over and over again, both in the saving of coal and the increase of comfort during the winter.

The installations and methods suggested below have been tried and tested and none of them is too difficult or costly to be undertaken by any man with a little ingenuity and a few of the ordinary tools that are or should be in every household.

To decide just where to begin improving the heating arrangements of a house is often a problem. In many cases the efficiency of a heating plant can be increased from 25 to 50 per cent, with a corresponding reduction in the coal bill; in other instances it is next to impossible to better the heating arrangements without changing the plant entirely or remodeling the house. Generally speaking, increased efficiency can be obtained by one or more of the following methods:

1. Operating the furnace more economically.
2. Distributing the heat more thoroughly and evenly.
3. Preventing waste of heat.
4. Providing a proper degree of humidity in the air.

So much has been written and so much advice given on how to operate all types of furnaces and heaters, that only carelessness

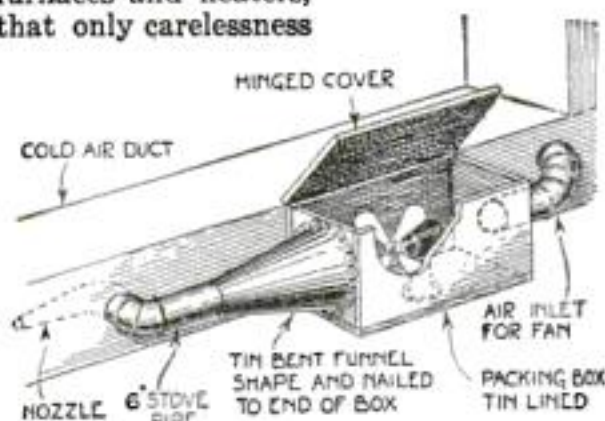


Fan placed in box alongside cold air duct

or indifference is responsible for losses due to poor regulation of the fire. In nearly every case, however, further improvement can be made by substituting automatic regulation by means of a thermostatic device. These are conducive to more even temperature throughout the house and prevent the losses caused by overheating at some times and allowing the fire to get too low at others. The home worker will find it comparatively simple either to install one of the commercial thermostatic regulators or to make one of his own as told in detail below.

### Heat Distribution Is Problem

More important still is the question of distribution. Most warm air pipe furnaces, which constitute the larger proportion of heating plants throughout the country, are notoriously inefficient in this regard. Nine tenths of the difficulty encountered with these furnaces can be overcome by using a blower or fan to assist the recirculation of air through the radiator or hot air chamber. It is a simple matter to construct one

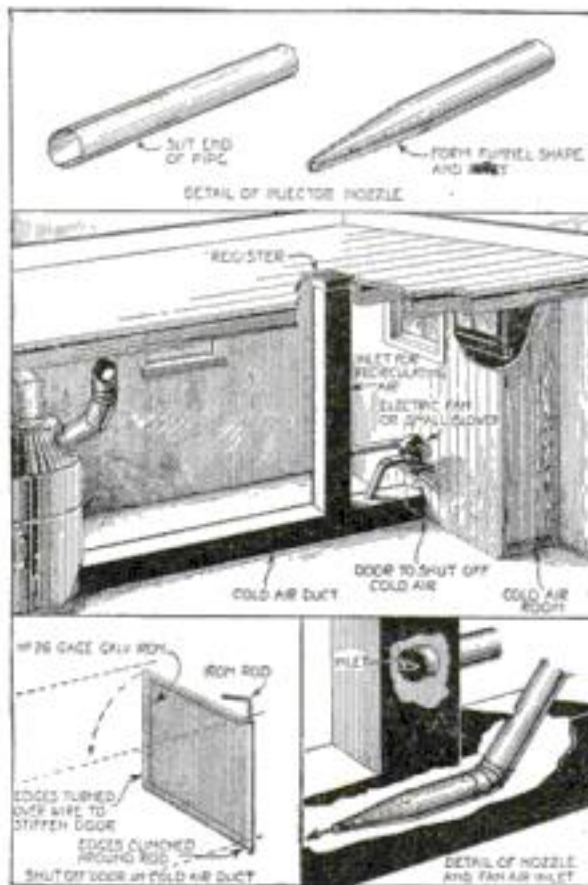


Recirculating air with the aid of a fan. Details show how the injector and cold air shut off are made

of these injectors if electricity is available for operating a fan or blower, and the accompanying instructions and illustrations give a method that can be adapted for most furnace installations.

The conservation of heat is also of great importance. The home worker should go from cellar to garret looking for places where he can prevent the escape of warmth that represents actual dollars and cents. Where to look for these "leaks" and how to prevent them is graphically explained on a following page.

Still another source of waste lies in the fact that most homes do not have sufficient moisture in the air during the winter. More heat is required for comfort when the air is too dry and, therefore, any system of

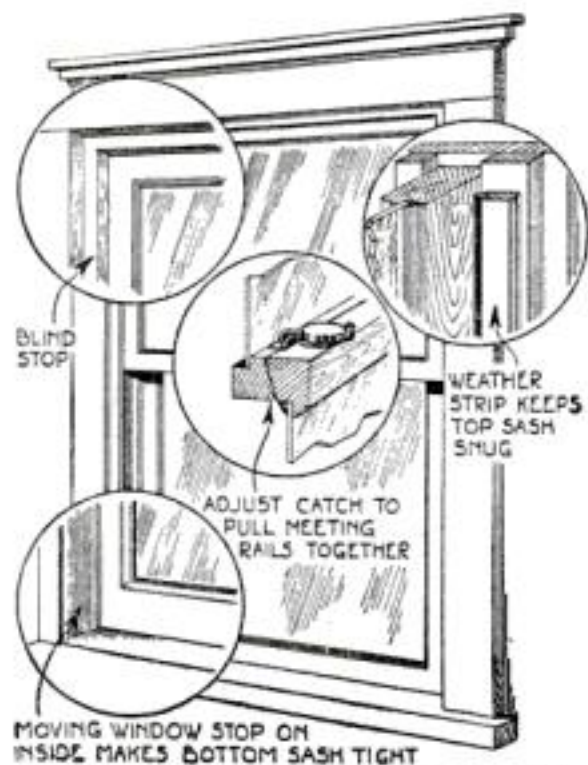


Making windows airtight prevents waste of heat

increasing the humidity will indirectly reduce the coal bills and at the same time make the house more comfortable and a healthier place in which to live. There are a number of ways of increasing the humidity and some of the best of these are described below. Instructions are also given for making a hygrometer for measuring humidity, for it is as difficult to preserve the proper degree of moisture in the air without means of measuring it as it is to keep the house evenly warmed without a thermometer.

### How to Install a Blower

To overcome most of the difficulties of the ordinary hot air pipe furnace, it is necessary to increase the amount of air passing through the furnace. This can be accomplished very simply with an ordinary electric fan or a ventilating fan or blower.

The best location for the blower is in or near the so-called cold air duct or inlet pipe. Obviously it is useless to make this installation if the inlet pipe leads directly from outdoors, because the fan then simply blows more cold air than usual into the furnace and decreases rather than increases the efficiency of the heating plant. The air must come from inside the house, at least in larger part. There are two reasons for this:

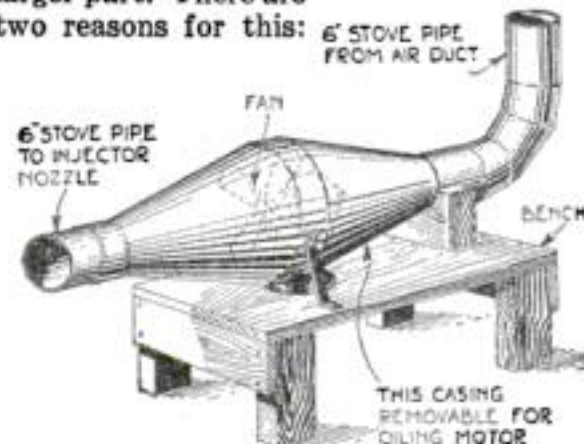

Casing of galvanized iron used for enclosing fan


one is that to force unduly large quantities of outside air through the furnace taxes it unnecessarily, and since the air has no means of outlet except through the window openings and door cracks, and the like, a high back pressure is created and hinders the correct distribution of the heat.

The first step, therefore, is to provide an indoor intake. This can be done by running a pipe of No. 26 United States standard gage galvanized sheet iron or a framework covered with tin, sheet asbestos or plaster boards, from a floor radiator on the first floor down to the regular intake pipe. The radiator should be located in some relatively cold corner, usually in the hall. A hinged or pivoted cut-off, as shown, can be arranged in the most convenient manner to permit either cold air, indoor air, or any proportion of the two being supplied to the furnace.

The next step is to provide for forcing a jet of air into the inlet pipe with a blower, which should not be placed too near the furnace. All that is necessary to do is to fit a conical casing in front of the fan, as illus-

(Continued on page 100)



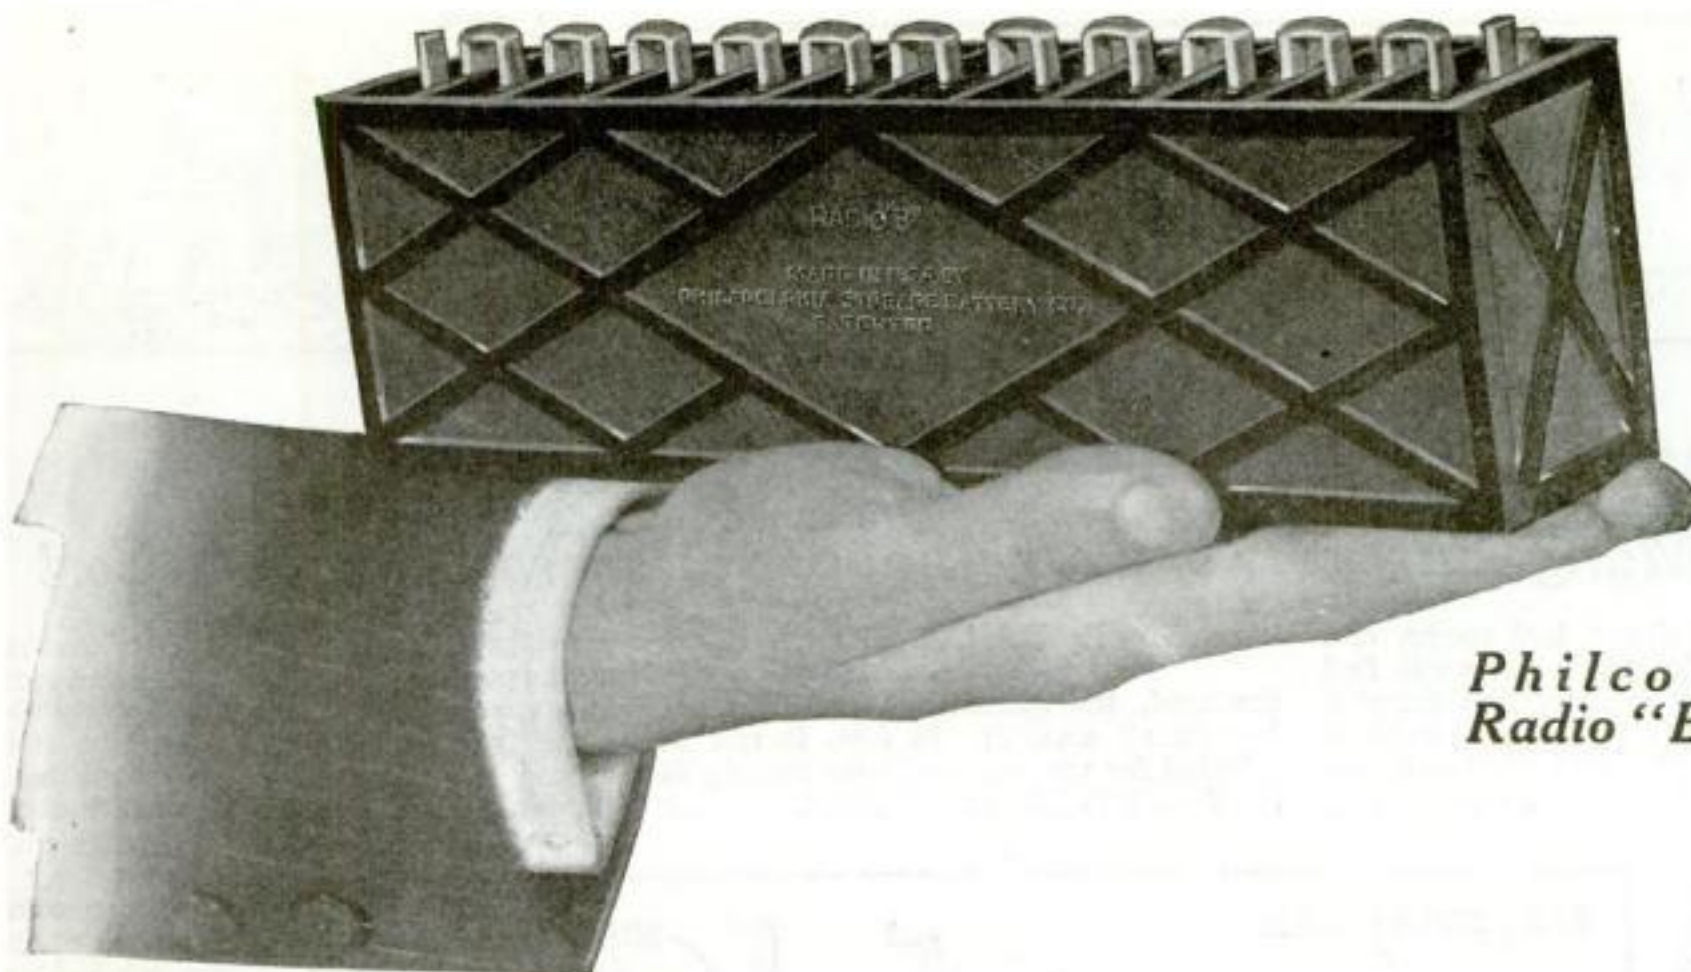

*Philco Drynamic  
Radio "B" Battery*

## *Born the day you get them*

The life of a new Philco Drynamic Radio Battery starts when you pour in the Philco Electrolyte—not weeks or months before at the factory. And no initial charging is necessary.

That means you can now get, *for the first time in history*, a charged, 100 per cent new storage battery the day you need it—a revolutionary development in battery engineering.

Philco Drynamic Radio Batteries are **CHARGED DRY** at the factory. Just add Philco Electrolyte and they're ready for use. No waiting for initial charging. No paying for battery life lost on the dealer's shelf.

What is even more important—Philco Drynamic Batteries, for both "A" and "B" Circuits, give you longer service per charge and last longer than any radio battery ever built. And their uniform current insures absolute freedom from "frying," "cracking" noises.

Why invite the annoyance of frequently tuning in—of having your pleasure spoiled by disturbing noises? Get the best possible results from your radio by installing these wonderful new Philco Drynamic Batteries **NOW**.

Ask your radio dealer for them or go to the nearest Philadelphia Diamond-Grid Battery Service Station.

**RADIO DEALERS**—Philco Drynamic Batteries let you into the battery business on a package goods basis. No acid sloppage. No charging equipment. No batteries going bad in stock. Wire or write for details.

### **Philadelphia Storage Battery Company, Philadelphia.**

*Makers of the famous Philco Slotted-Retainer Batteries—standard for automobiles, electric passenger cars and trucks, mine locomotives and other high-power, heavy-duty battery services.*

**PHILCO**  
DRYNAMIC RADIO  
BATTERIES



*Philco Drynamic  
Radio "A" Battery*

Mail this coupon today  
Sirs: I want to know more about the new Philco Drynamic  
Radio Batteries.  
Name .....  
Street .....  
City .....  
State .....  
Business .....



# Better Shop Methods

How Expert Mechanics Save Time and Labor



## Shaper and Planer Attachment for the Lathe Serves Many Purposes of Large Shaper at a Fraction of the Cost

By B. R. Wicks

**M**ACHINE shops, tool rooms, and automobile repair shops will find the shaper attachment illustrated a valuable addition to the engine lathe. With its aid, shaping and planing operations of many kinds can be performed; slots, keyways, and splines can be cut, taps and reamers grooved, and all sorts of irregular, angular shapes machined.

To obtain the maximum utility of range and action from the attachment, it has been designed for use in two different ways:

1. Mounted on the lathe faceplate, it machines work held on a table fastened to the compound toolrest. In this way it really serves as a planer, as the work is reciprocated beneath the tool.

2. Held in the toolpost, the shaper head operates on work fastened in a chuck or on the faceplate, or mounted on the lathe ways, resting on a table.

The utility of the shaper goes without saying, but many machine shops, commercial garages, and practically all home model-making workshops have no shaper. A great deal of work, therefore, has to be filed to shape.

With this attachment such labor becomes unnecessary, and if reasonable care is taken in laying out the work, much that is usually done with a large shaper can be accomplished equally well, if not so rapidly, with this machine.

The design has been carefully studied from different angles and is believed to be practically and mechanically well suited for giving the best results under the necessary limitations of range and power. The dimensions shown on the detail drawing are for a shaper attachment suitable for use on a lathe with a swing of from 9 to 13 in. In machine shops where larger lathes

are used, the attachment can be made heavier all around; in fact, it can be adapted for use on faceplates ranging in size from 3 to 5 ft. or even more.

drawings exactly. Care must be taken that all the parts are absolutely square and true, and the fit of all parts, particularly the slides, are perfectly in line. The slots should be scraped after they have been planed, and care should be taken that the angles match each other.

The tongue on the bottom of the frame, marked No. 1, is planed to fit exactly, without the least shake, in the toolpost slide, and is held in position with two bolts. A special slide can be made, if the builder so desires, but it will be found that with a perfect fit in the toolpost slide, this construction will be rigid enough to stand up under all the shaping operations within the range of the machine.


By taking out the toolpost, part No. 7, and putting in its place a small extension tool holder, keyways in flywheels, pulleys, gears, and cams, as well as oil grooves in bearings and bushings, can be cut on short notice after the holes have been bored and reamed. This can be done before the work has been removed from its position in the chuck or on the faceplate. In the same way it is

possible to machine corners that would be difficult or impossible to reach with the ordinary shaper tool.

If a small tool holder is used in the regular toolpost, a large number of tools of various shapes can be made from 3/16-in. square self-hardening steel. Taps, reamers, and counterbores can be held in the chuck by the shank and the flutes formed by shaping, the back gear being used for an index. This is a practical method and will be found a great saver of time.

For use with the shaper head when held on the toolrest a table should be made about

(Continued on page 82)

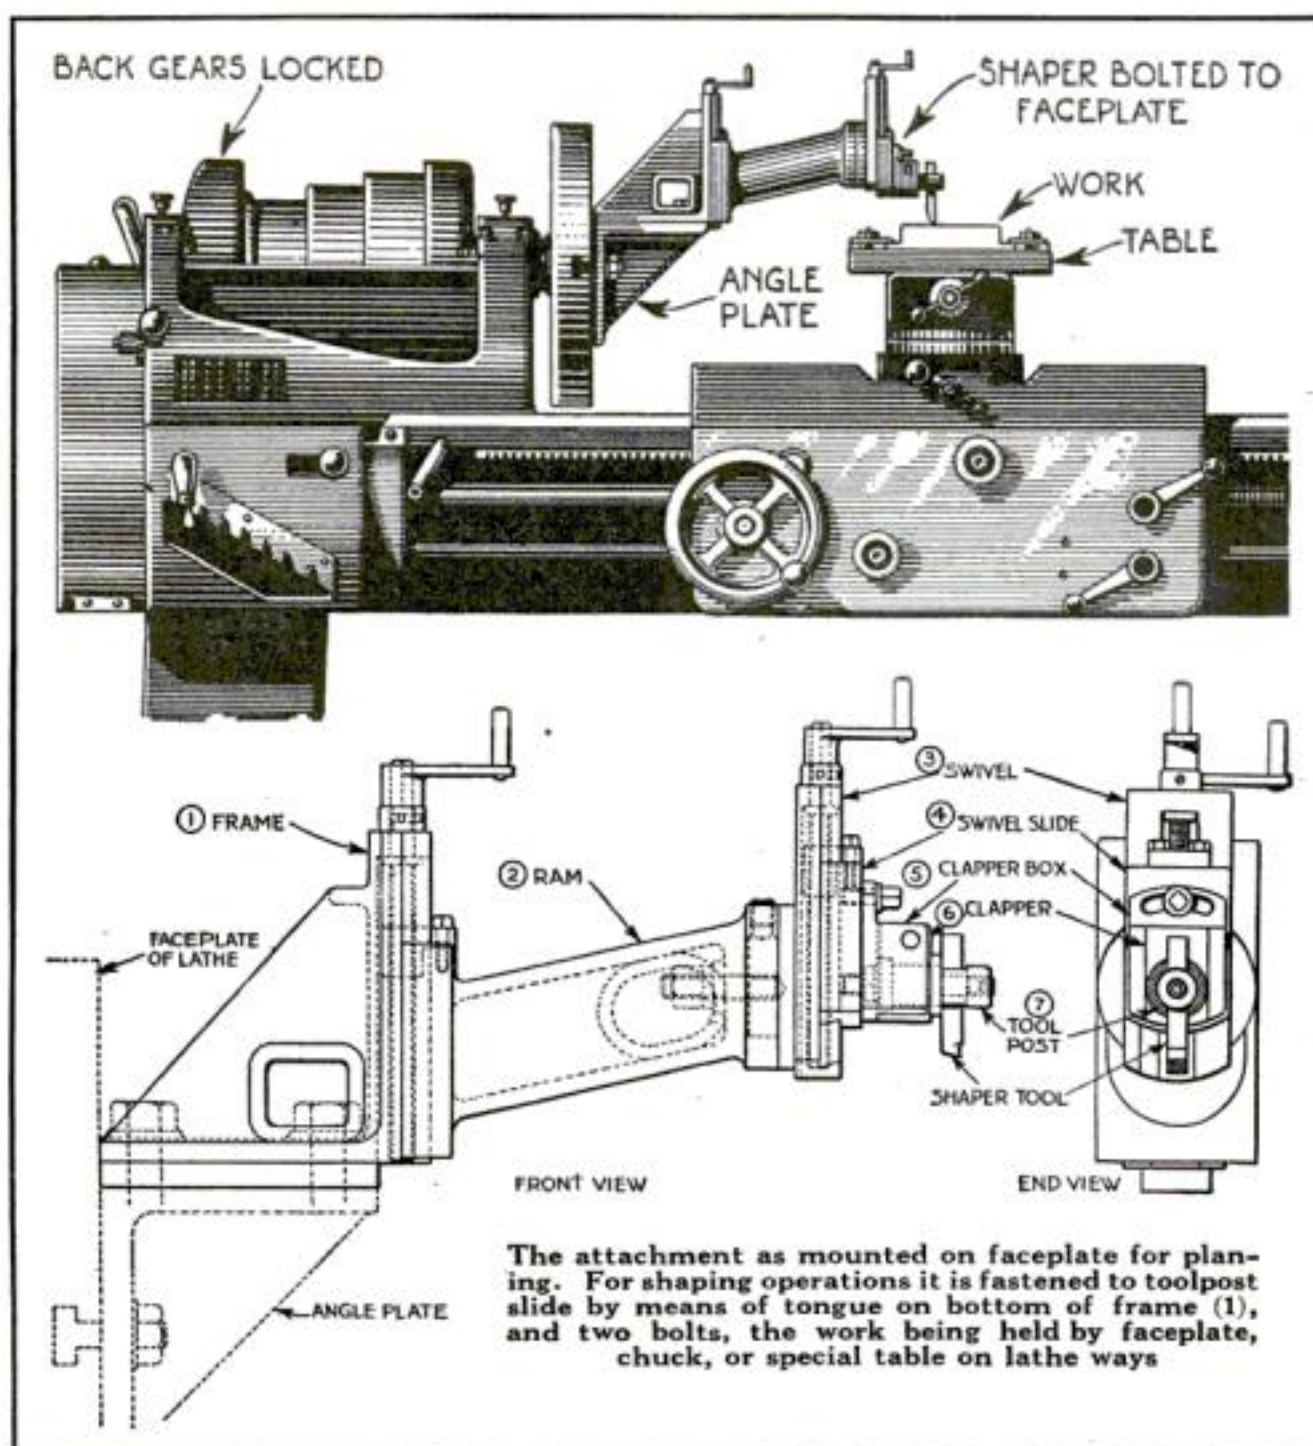

The movement of the table or platen when mounted as shown in the accompanying illustration and the movement of the shaper head when similarly held on the toolrest, is obtained by turning the hand-wheel that operates the lathe carriage. The length of the stroke can be regulated by stops on the lathe ways. If desired, the lead screw can be utilized for performing the work automatically, but this is by no means necessary.

The parts of the shaper do not require any lengthy description, as their shapes and sizes are fully covered in the detail drawings. It is merely necessary to follow the





# RADIO ESSENTIALS

This Trade Mark Means **UTILITY, CONVENIENCE**  
and **SATISFACTION** in Radio



**PACENT**  
Universal Plug  
Cat. No. 50  
Price \$1.00



**PACENT**  
Radio Jack  
Cat. No. 61-66  
Prices .70 to \$1.20



**PACENT**  
Twinadapter  
Cat. No. 51  
Price \$1.50



**PACENT**  
Multijack  
Cat. No. 52  
Price \$1.50



**PACENT**  
Audioformer  
Cat. No. 25  
Price \$5.00

**PACENT**  
Universal  
Detector Stand  
Cat. No. 30  
Price  
\$1.50



**PACENT**  
Duo-lateral Coil  
Size U.S.  
25 to 1500



**PACENT**  
Duojack Cat. No. 53  
Price \$1.50

**Y**OU can do without PACENT RADIO ESSENTIALS — but you can't get the **MOST** from your radio equipment unless you use them.

Every PACENT device is designed to meet a definite Radio need and developed upon the **BEST** Radio Engineering Principles.

**THE PACENT UNIVERSAL PLUG**—the **FIRST** Radio Plug on the market, is the standard of Radio authorities and is an absolute **ESSENTIAL** on your phone cord.

**THE PACENT TWINADAPTER** permits a single jack to accommodate **TWO** Plugs.

**THE PACENT DUOJACK** (a recent PACENT innovation) instantly converts an ordinary binding post set to a plug-and-jack set and provides for **TWO** plug connections.

**THE PACENT MULTIJACK**—a unit of **THREE** jacks for the price of **ONE**—provides a series of jack connections.

Every PACENT **ESSENTIAL** adds delight to operating your equipment. These ingenious and useful devices are the result of fifteen years practical Radio experience and a thorough understanding of existing Radio needs.

Major Armstrong, U.S.A. and other leading experimenters appreciate the satisfactory performance of PACENT RADIO ESSENTIALS and use them regularly in their radio apparatus.

Try PACENT devices and see how they will help you get more from your set. Your dealer will demonstrate any PACENT **ESSENTIAL** for you.

*Send for our Descriptive Bulletin P. S. 100*

**DON'T IMPROVISE — PACENTIZE**

**PACENT ELECTRIC COMPANY**

INCORPORATED

Manufacturers and Distributors of Radio and Electrical Essentials


EXECUTIVE OFFICES  
22 Park Place  
New York, N. Y.



BRANCH OFFICES  
CHICAGO, 33 So. Clinton Street  
PHILADELPHIA, Bourse Bldg.  
WASHINGTON, D. C., Munsey Bldg.

Member Radio Section, Associated Manufacturers of Electrical Supplies  
Canadian and British Licensees — COLONIAL RADIO, Ltd., Hamilton, Canada.



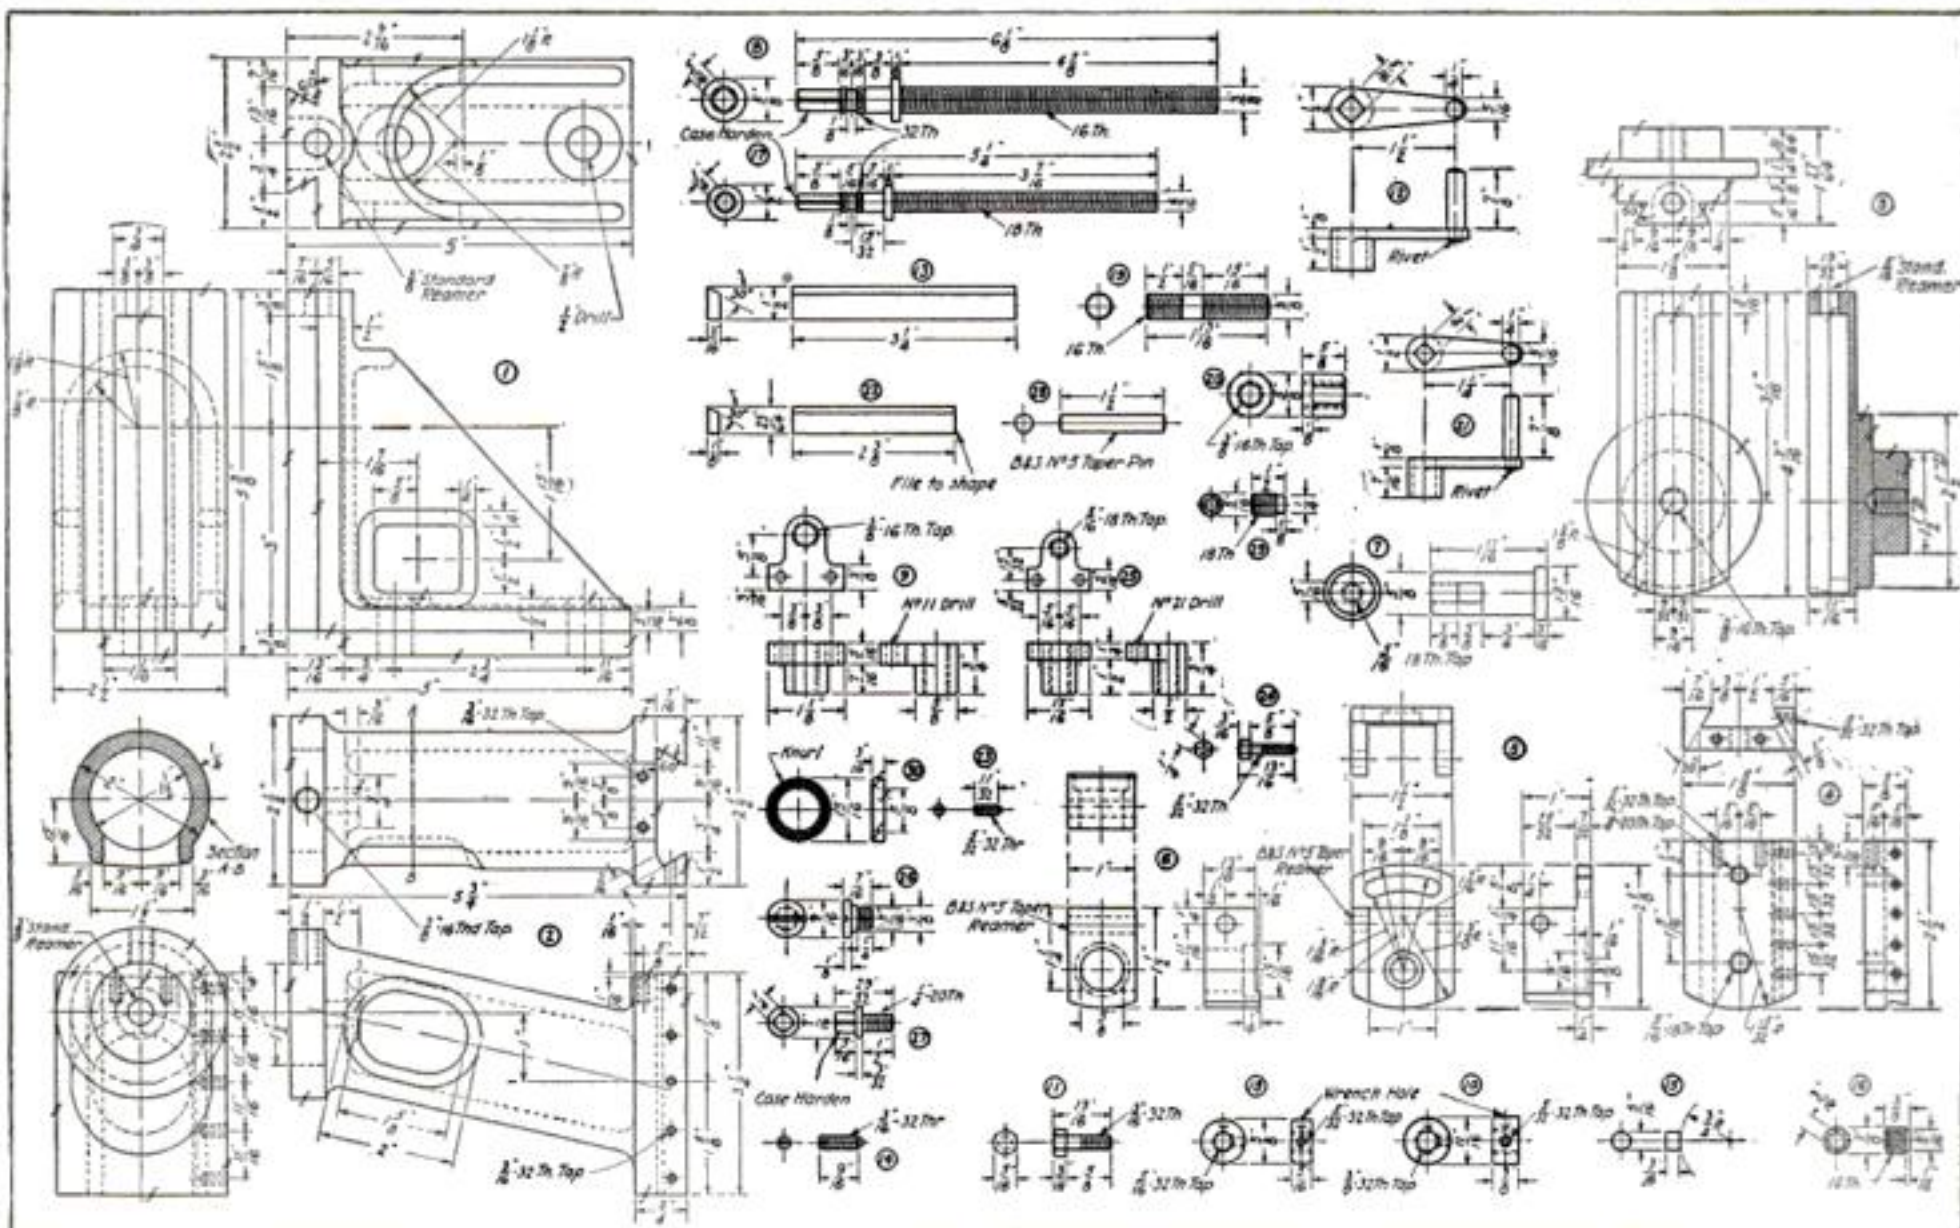


## Shaper and Planer Attachment

(Continued from page 80)

6 by 9 in., as shown. On the bottom of the table a tongue is planed to fit the gap between the ways, less  $\frac{3}{8}$  in. This  $\frac{3}{8}$ -in. space is to provide for a gib to take up all the play by means of setscrews in the inside edge of the tongue. The table is held in position between the headstock and carriage by means of two studs and straps that fit under the gap. All the planing on the table can be done with the shaper itself when the table is set up in position.

The bottom of the table must be planed first and the gib placed in position; the holes for the setscrews drilled and tapped, and the holes in the bottom of the tongue drilled and tapped, and the studs and straps made. When the table is put into place, the gib is set up by means of the setscrews

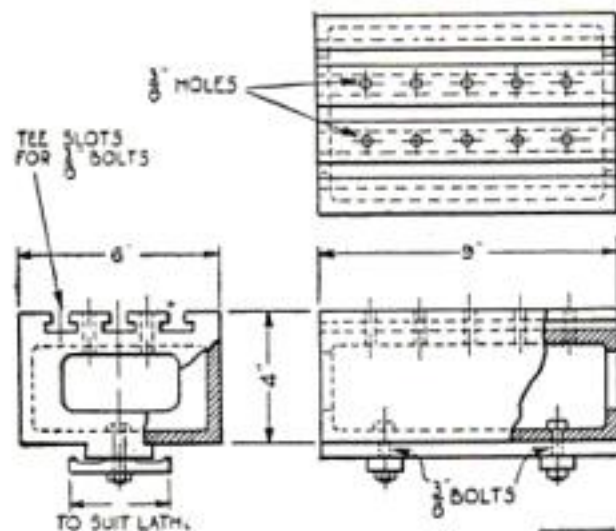

This special table for holding work is fastened on the bed of the lathe

and the straps tightened by means of nuts on the studs. The table is then rough-planed with a round-nose tool and a light cut is taken; the finishing is then done with

Details of the various parts, the identifying numbers, names, and materials of which are as follows:

1 Frame - - - - - C.I.	12 Frameslide screw handle M.S.	21 Ram slide screw handle M.S.
2 Ram - - - - - C.I.	13 Ram gib - - - - - C.R.S.	22 Swivel gib - - - - - C.R.S.
3 Swivel - - - - - C.I.	14 Ram gib setscrews (5 required) - - - - - Std.	23 Swivel gib setscrews (5 required) - - - - - Std.
4 Swivel slide - - - - - M.S.	15 Ram setscrew thrust block - - - - - M.S.	24 Ram slide screw nut bolts (2 required) - - - - - Std.
5 Clapper box - - - - - M.S.	16 Ram setscrew - - - - - M.S.	25 Ram slide screw nut - Bz.
6 Clapper - - - - - M.S.	17 Ram slide screw - - - - - M.S.	26 Clapper box swivel screw M.S.
7 Toolpost - - - - - M.S.	18 Ram slide screw collar M.S.	27 Clapper box bolt - - - - - Std.
8 Frame slide screw - - - - - M.S.	19 Swivel retaining stud - M.S.	28 B. & S. taper pin - - - - - Std.
9 Frame slide screw nut - Bz.	20 Swivel retaining stud nut - - - - - M.S.	29 Toolpost setscrew - - - - - M.S.
10 Frame slide screw collar M.S.		30 Toolpost collar - - - - - M.S.
11 Frame slide screw nut bolt (2 required) - - - - - Std.		

a flat-nose tool and about a half turn of the screw, making what is known as a ribbon finish. The slots should be planed very smooth and tested with a size block so that they will be uniform in width, in order that a fixture made for one will fit in the others.

Also plane down on one side so that a try square can be used to square up work, as on a planer platen.

Angle plates, a small vise, a straight edge, and a small set of index centers can also be provided. The height of the table is determined by the swing of the lathe.


When the shaper is strapped to the faceplate of the lathe, a table 5 in. wide and 8 in. long can be made to fit on the carriage slide. This table also should be furnished with T slots. In its manner of working it acts as a small planer platen, so that pieces up to 8 in. in length can be planed on it with ease. A small pair of index centers can be made to fit the table with a swing to about 3 in. and gears can then be cut. By such methods, the full usefulness of the tool can more readily be realized.

It is important that this table for the carriage slide should be planed smooth and true. Before starting to plane it, put a round pointed tool in the shaper toolpost and bring the point of the tool so that a piece of newspaper will be held just between the point and the top of the tool slide.


Run the slide over and see if there is any change between the paper and point of the tool on the other side. If there is, throw out the back gears and shift a tooth or two, relocking the gears and repeating the test;

do this until both sides prove alike. Then place the table in position and plane off the top. See that all four corners, when finished, measure alike with the micrometer.

Next, mark the teeth in the back gear, and drill and ream right through the faceplate into the headstock for a tapered dowel pin, fitted with a nut, so that it can be removed readily when not needed. If pos-



CUTTING A KEYWAY IN A SHAFT

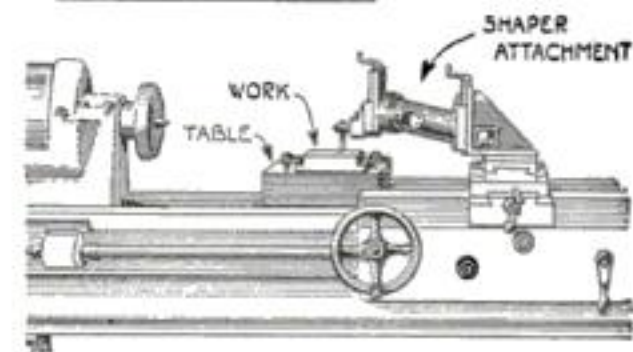


Used in connection with the toolrest, the attachment has wide range of utility

sible, use this faceplate and angle plate only for the shaper attachment.

To save time in setting up the shaper attachment on the faceplate, it is advisable to drill and ream the faceplate and angle

(Continued on page 84)



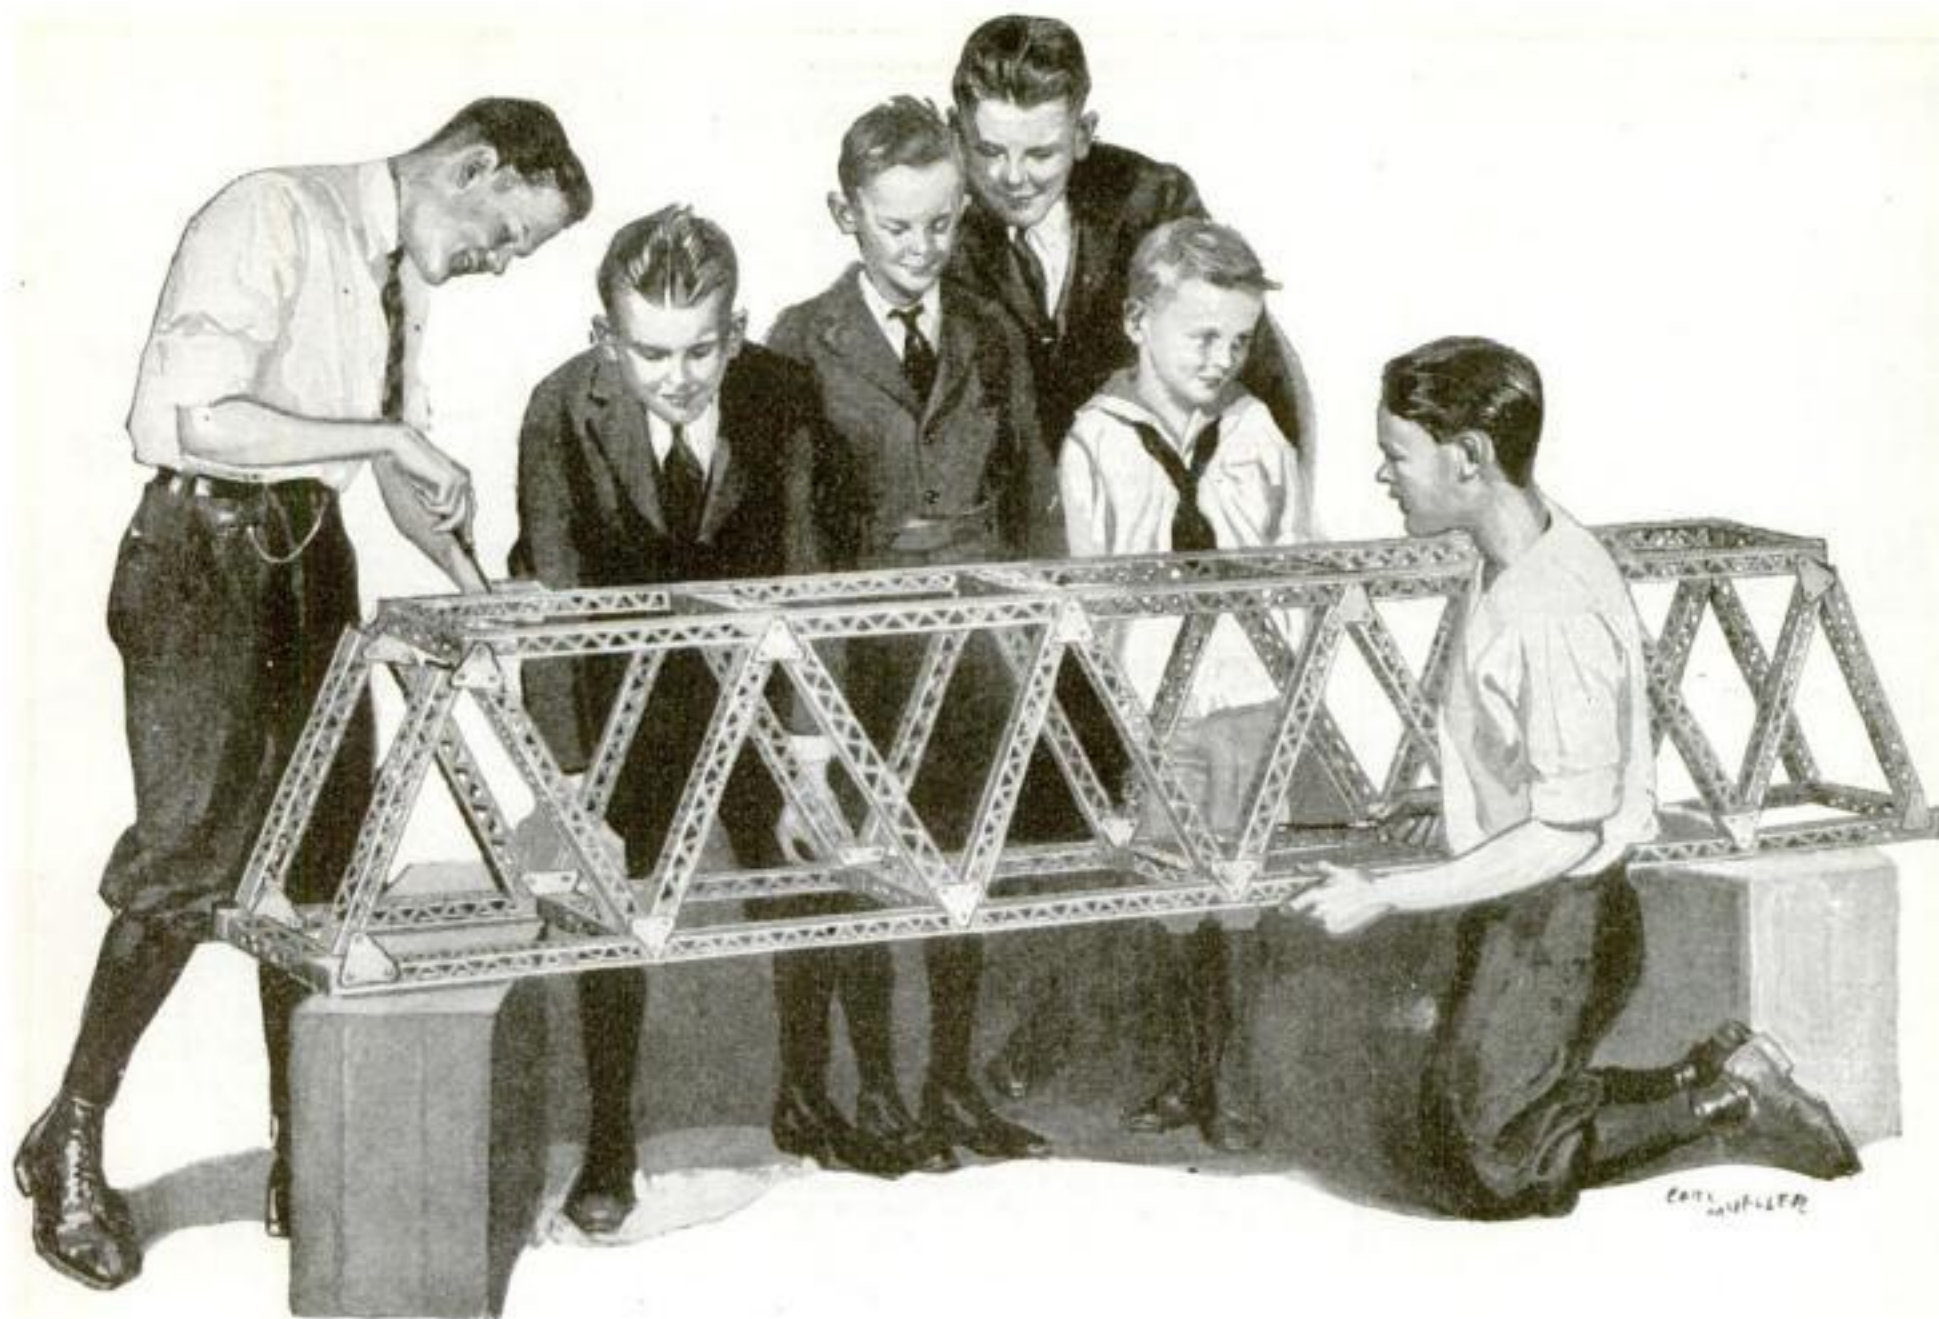

## Boys Today—Men Tomorrow!

### ERECTOR

The most wonderful construction toy in the world. Boys can make machines, bridges, cranes, towers, in fact any engineering feat can be duplicated with a Gilbert Erector. The \$5.00 sets have a sturdy electric motor that will lift 200 pounds. Erector is the toy most boys pick for it is the most popular toy in the Gilbert line.



IF YOU want to know more about Gilbert Toys send 10c for the Gilbert 1923 Year Book. It not only contains wonderful articles on radio, magic, sports, chemistry and engineering that will delight the heart of any boy, but it is also a complete catalog of Gilbert Toys. Use the coupon opposite.

THOUSANDS of young men from 20 to 30 years old, who are today making great strides in engineering, chemistry, and other sciences were Gilbert Toy boys just a few years ago. I have watched their progress with intense interest and I will tell you that I am mighty proud that my engineering toys have started these boys on the road to success. When I was a boy I loved to play with scientific things myself, but no one made the kind of toys that I wanted, so I said that some day I would make for a new generation of boys, toys that I wanted when I was a kid myself.

That is why there are wonderful Gilbert Toys for all kinds of scientific fun, electrical sets, telegraph sets, signal engineering, weather bureau outfits, civil engineering, hydraulic and pneumatic engineering, light experiments, sound experiments, glass blowing, mineralogy, magnetism, as well as all kinds of magic outfits, and sets to perform tricks with coins, handkerchiefs and cards. There is a Gilbert Toy for every boy. They range in price from \$1.00 to \$30.00.

Make this the best Christmas you ever had in your life, get a \$5 Erector Set or any other Gilbert Toy for the kid brother, boy friend or son.

A. C. GILBERT, *President*

THE A. C. GILBERT COMPANY  
New Haven, Conn.

IN CANADA  
THE A. C. GILBERT-MENZIES CO.  
LIMITED  
Toronto

# GILBERT TOYS

The A. C. Gilbert Company,  
138 Blatchley Avenue,  
New Haven, Conn.


Enclosed is 10c. Send the 1923  
Year Book to

Name.....

Street.....

City.....State.....



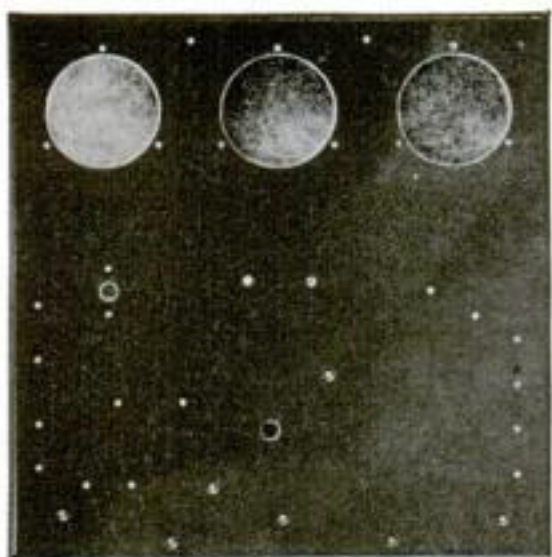

## Improve Your Radio Set with a Panel of

# CONDENSITE CELORON

The better the insulation the finer your radio set will perform. Keep your connections tight and your insulation right. This is one radio axiom. Here is another: Get the best panel you can buy.

The essential qualities of a radio panel are non-conductivity, strength and appearance. Condensite Celoron fulfills them completely. This hard, strong, waterproof material will give you surface and volume resistivities, and a dielectric strength, greater than you will ever need. In addition to this the material machines readily, engraves with clean-cut characters and takes a high, natural polish or, a beautiful, dull, mat surface. Approved by the Navy Department, Bureau of Engineering.

Mount your equipment on a Celoron Panel and note the improvement.

Are you a radio enthusiast? Step into your nearest dealer's and get a Celoron Panel cut to the size you want. If, by any chance, that dealer cannot supply you, write us direct.

Do you make radio equipment? If you are not now using Condensite Celoron let us give you the full facts.

Are you a radio dealer? Send today for our Special Dealer's Proposition covering Celoron Panels and Insulated Parts.

**In any case write us today.**

**Diamond State Fibre Company**  
Bridgeport (near Philadelphia), Penna.

Branch Factory and Warehouse, Chicago  
Offices in Principal Cities

In Canada: Diamond State Fibre Company of Canada, Ltd., Toronto


## BETTER SHOP METHODS

### Shaper and Planer Attachment

(Continued from page 82)

plate for two No. 1 taper pins, also provided with nuts with which they can be withdrawn. It will then always be possible to locate the angle plate readily when resetting it.

To avoid the necessity for the special patterns and core boxes required in making the castings, an alternative design for the ram is given. For machine shops or tool rooms where no facilities are available for

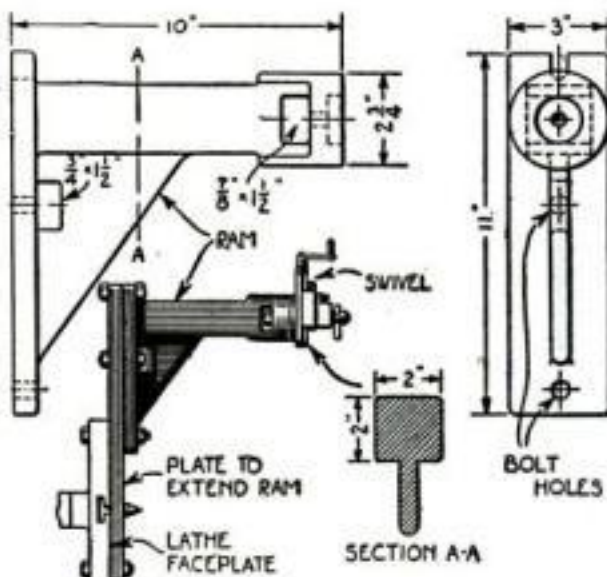

How ram may be constructed without castings, one slide only being used


having the castings made easily, this construction, making use of machine steel, is recommended. It has one other point in its favor in that the steel will not crystallize as castings are apt to do, and will stand up better under excessive strains or abuse.

Additional range for the tool can be obtained by means of an extra plate bolted to the faceplate, as shown.

Another simplification that can be made at the option of the builder is to have only one slide on the ram. This does not reduce the capacity and flexibility of the attachment very much, but eliminates a lot of work in making it.

### How to Reproduce a Steel Stamp or Numbering Stencil

**H**ARDENED steel numerals or stencils, such as are used for marking metal parts, can be preserved in die form so that duplicate punches can readily be made in case of the breakage or loss of the original. The figure, letter, or mark is embedded in the surface of a block of tool steel that previously has been annealed. As many sten-

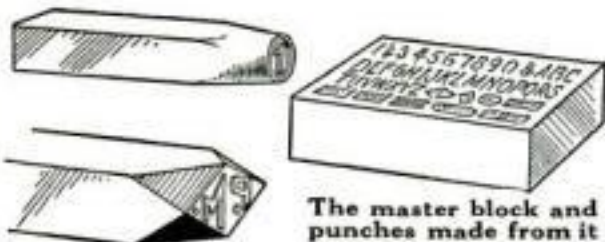

The master block and punches made from it

cil marks are made in this block as it is desired to keep. The block is then hardened or tempered.

At any time it is desired to make duplicates, a suitable piece of bar stock or other steel for the stencil, is driven, when soft, into the proper depression in the block. This makes a clean profile and only a small amount of relief work is required to finish the stamp, after which it is tempered in the usual way.—M. B. K.

# ATKINS SILVER STEEL SAWS

## Write for These FREE Books

### Every Saw User Should Have Them

These three helpful books are full of time-saving and money-saving suggestions for saw users. They show you the best saw for every use, tell how to buy and care for saws of all kinds, and give useful facts on construction work.

### The Name "Atkins"

Has been identified with the manufacture of saws for three hundred years. On a saw this name means that the saw is made of the famous "Silver Steel", found only in Atkins saws. It means that the saw will run easier, cut faster, hold its edge longer, and save you time, labor and money in cutting wood or metal.

### Before You Buy Any Saw—

It will pay you to learn all about the Atkins line. It includes a better saw for every wood and metal cutting purpose—a saw that will help you do your work better, quicker and easier—give you the greatest value and longest service for your money.

### Get These Books—NOW

"Saw Sense" "How to Care for Saws"  
"Hack Saw Chart"

We'll send you any or all of them, FREE. Just write your name and address on the margin of this page, state which books you want and mail it to us TODAY, giving us your dealer's name. No matter what you want to know about saws, ask Atkins.

**E. C. ATKINS & CO., Inc.**  
Dept. R Indianapolis, Ind.

Makers of "Silver-Steel" Saws and Tools  
sold by Leading Hardware Dealers and  
Jobbers, Mill Supply Houses and Factory  
Branches all over the World.



Trade Mark Registered

# WURLITZER

200 YEARS OF MUSICAL INSTRUMENT MAKING

Play the  
Wurlitzer  
Saxophone



**T**HINK of the pleasure it will mean to you to play the most popular of all wind instruments. Fascinating to play alone; the center of attraction in any musical group. Or you may turn your ability into a handsome profit—saxophone players are among the highest paid of all entertainers.

## Try It in Your Own Home

You may now have a Wurlitzer Saxophone for a week's trial in your own home. No obligation to buy—no expense for the trial—you do not risk a penny. If you keep the saxophone you may pay for it at the rate of only a few cents a day.

### Easy to Learn

Practice with it—see how easily it blows and how simple the fingering is. As easy as whistling a tune. With the Wurlitzer Self-Instructor you'll be able to play simple melodies in a few days.

### Any Musical Instrument On Trial — Easy Payments

Wurlitzer will send you any instrument on this liberal free-trial easy-payment plan. All instruments to you at lowest factory prices. Special combination

**"Wurlitzer Saxophone is without a Peer"**—says Herman F. Schmidt, of Sousa's Band

The rich, mellow tone of the Wurlitzer Saxophone, together with the improved fingering system, have rightly made it the favorite of both professionals and amateurs. Read these extracts from the hundreds of letters we receive from pleased purchasers:

"To say I am perfectly satisfied is putting it lightly; I am delighted."

"My Wurlitzer saxophone could not be bought from me for \$200.00."

"I am only a beginner on the saxophone but I intend to play at a Christmas program next week."

"Without your credit system I could never have bought a saxophone. Terms were better than I expected."

offers on complete musical outfits—velvet-lined case, all accessories, Self-Instructor, etc.—everything you need at practically the cost of instrument alone.

## Send for New Illustrated Catalog

The greatest musical catalog ever published! Over 3,000 articles—every known instrument described and illustrated—many of them shown in full colors.

Wurlitzer has stores in over 30 cities. No matter where you live, you can buy Wurlitzer instruments direct by mail the same as at any of these stores. Send the coupon today!

Copyright 1922,  
The Rudolph Wurlitzer Co.

The Rudolph Wurlitzer Co., Dept. 1788

117 E. 4th St., Cincinnati—329 So. Wabash Ave., Chicago

120 W. 42nd St., New York—250 Stockton St., San Francisco

Send me your new catalog with illustrations in color and full descriptions of every known musical instrument. Also tell me how I may have any instrument on free trial in my own home and may pay for it in easy installments. No charge, no obligation.

Name .....

Address .....

State musical instrument in which you are interested.



**"It Carries  
Its Table  
On Its Back"**



These are the words of a prominent author and traveler concerning the

# Remington Portable

The permanent baseboard of this machine makes it wonderfully convenient to use *anywhere* and under all conditions, at home or afield. You can operate it equally well before your cozy fireplace or on your lap while seated on a log in the woods.

And convenience is only one of the Remington Portable's many advantages. It is the most complete portable typewriter. Has the *Standard Keyboard* and many other big machine features. Light, durable and compact; fits in case only four inches high. Sold by over 2,000 dealers and all Remington Branch Offices.

Send for our illustrated: "Your Ever Handy Helper." Address Dept. 67

**REMINGTON TYPEWRITER COMPANY**  
(Incorporated)

374 Broadway, New York

Paragon Ribbons for Remington Portable Typewriters, 50c each, \$5 a dozen



## BETTER SHOP METHODS

### Keeping Up to the Minute on Shop Methods

WHILE going through a large industrial plant I was deeply interested in the planning department. In it was a young man who, seated at a table before a pile of magazines, was making vigorous use of a pair of scissors, a roll of adhesive paper,



Useful material is marked so as to catch the eye immediately

KEY Chart of Colors	
RED	— FOUNDRY
BLUE	— MACHINE SHOP
YELLOW	— PATTERN
GREEN	— PAINT
BLACK	— SHIP
SCARLET	— DRIP FORGE
PURPLE	— DRAFTING
BROWN	— CARPENTER SHOP
PINK	— BOILER SHOP


and a box of wax crayons. While I was watching him, he came to an article in a technical magazine on the pouring of metals, a subject of interest in the foundry department. He clipped a label, marked a red X at the top of it, and stuck it on the page so that it projected at the top of the magazine. This was to call the attention of the foundry superintendent to it. Each department was designated by a different color.

The policy of this firm is that each executive should spend an hour or two a week in the reading room, and all of them appreciate being able to select material of interest to them without taking the time to look through all the magazines.—J.V.R.

### Jig for Cotter-Pin Holes Has Adjustable Stop

TO MAKE a jig for drilling cotter-pin holes in screws and bolts, take a block of steel, bore it almost through, and fit a stop screw so that the work can be inserted exactly the right distance.


By boring holes of different diameters in one block, the one jig will serve for drilling cotter-pin holes in machine screws and bolts of several standard sizes.—H. F. B.



### Making a Center Tester for Tool and Die Work

THIS center tester is one I made for myself and use right along on tool and die work in the shop.


The dimensions given may not suit every mechanic, but they can, of course, be

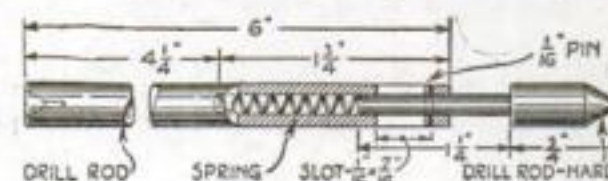


Details of the tester, the dimensions of which may be varied as desired

varied to suit the individual judgment. On fine work an indicator may be used with the tester.—H. BERG.



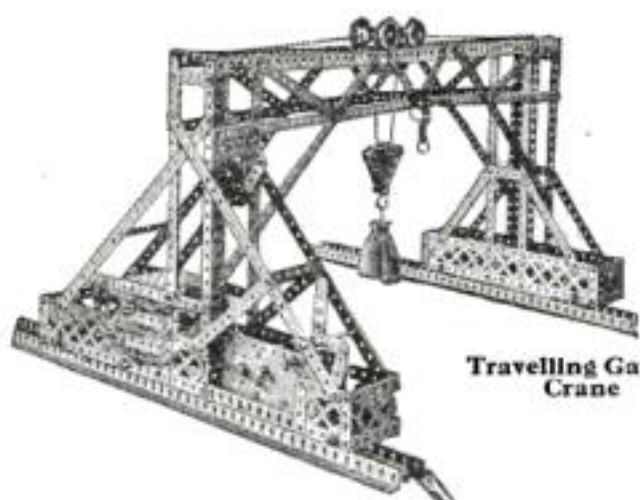

Travelling Gantry Crane

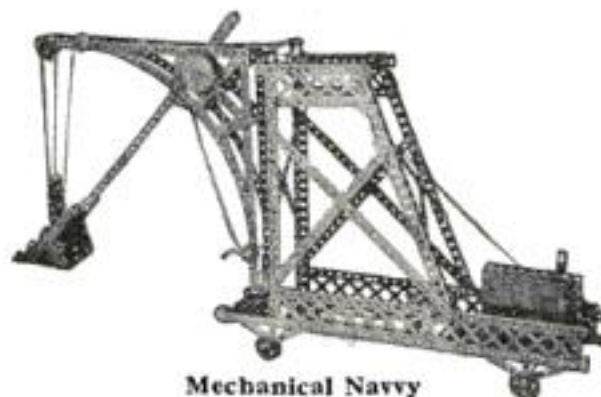

Mechanical Navy



Mine Shaft Elevator

## REAL ENGINEERING FOR BOYS

# MECCANO

The reason why you can build such wonderful models with Meccano is that every part is a real engineering piece—pulleys, gears, strips, girders, rods, couplings and cranks, all perfectly designed and accurately made.

ANYWHERE BETWEEN 5 AND 70 is the correct age to start Meccano. The youngest boy can begin to build the moment he gets his outfit home. A screw driver and spanner are the only tools necessary. Every outfit complete, nothing further to buy.

FULL INSTRUCTIONS. A Big Illustrated Book of Instructions goes with each outfit, making everything perfectly clear. No study needed.

### FREE TO BOYS

MECCANO PRODUCTS, telling boys all about the joys of Meccano model building and how to begin.



DICK'S VISIT TO MECCANOLAND, a fascinating story of a boy's visit to the Meccano headquarters, and his experiences there.

HOW TO MAKE A COMPLETE MECCANO RADIO RECEIVING SET, capable of receiving radio concerts, lectures, etc.

HOW TO GET THEM FREE. Just show this page to three chums and send us their names and addresses with your own. Put No. 37 after your name for reference.


### MECCANO OUTFITS

No. 0 builds 70 models.....	\$1.50	No. 2 builds 151 models.....	\$6.00
No. 1 builds 105 models.....	3.00	No. 3 builds 196 models.....	9.00
No. 1X (with electric motor) ..	5.00	and up to \$40.00	


Sent prepaid on receipt of price if not at your dealer's.

MECCANO COMPANY, Inc.  
Div. K, ELIZABETH, N. J.


In Canada:  
MECCANO Ltd.  
11 Colborne St.  
TORONTO

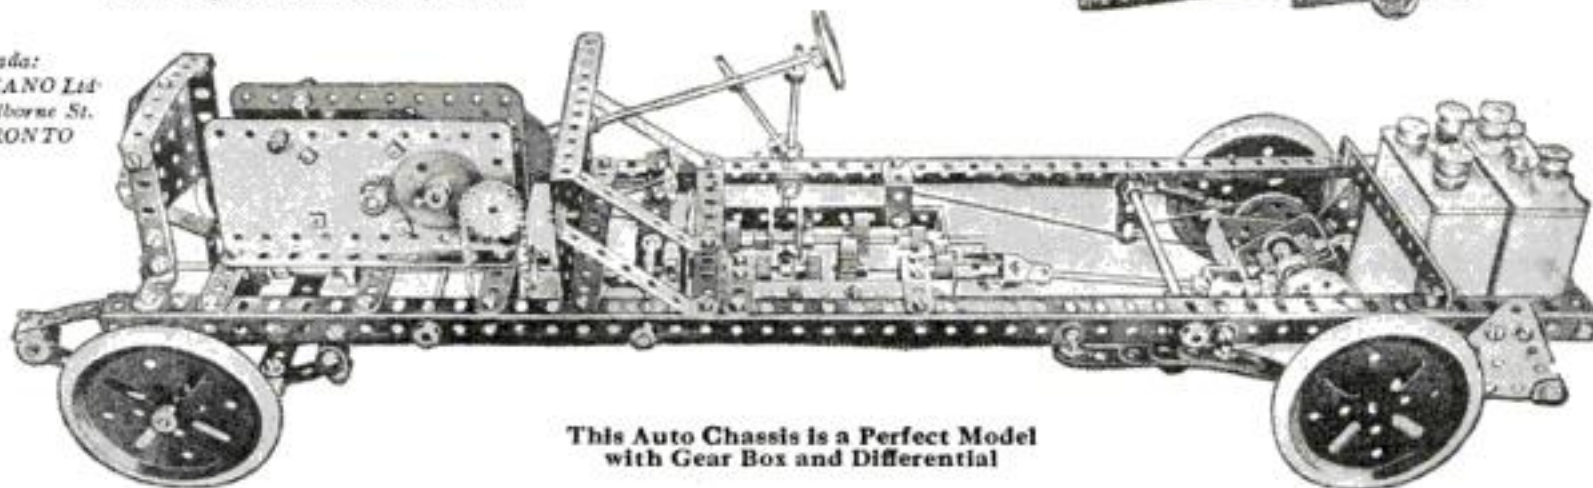

This Auto Chassis is a Perfect Model  
with Gear Box and Differential

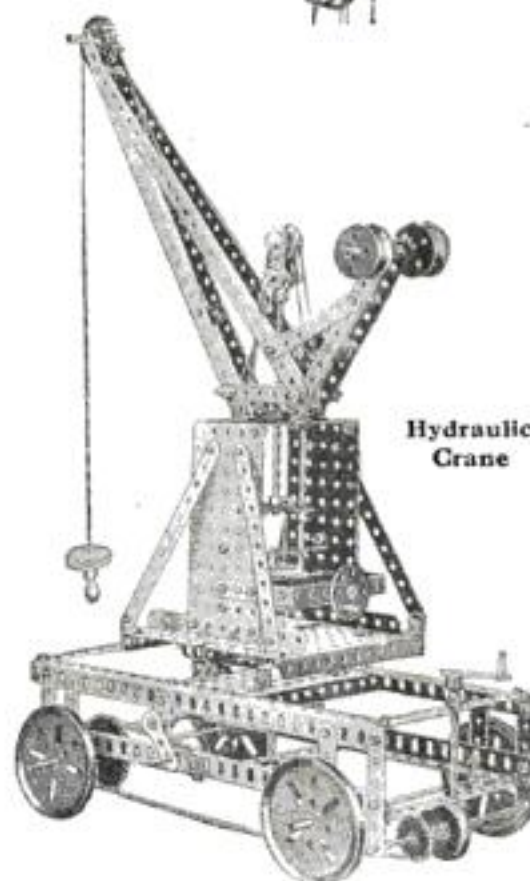

Hydraulic Crane

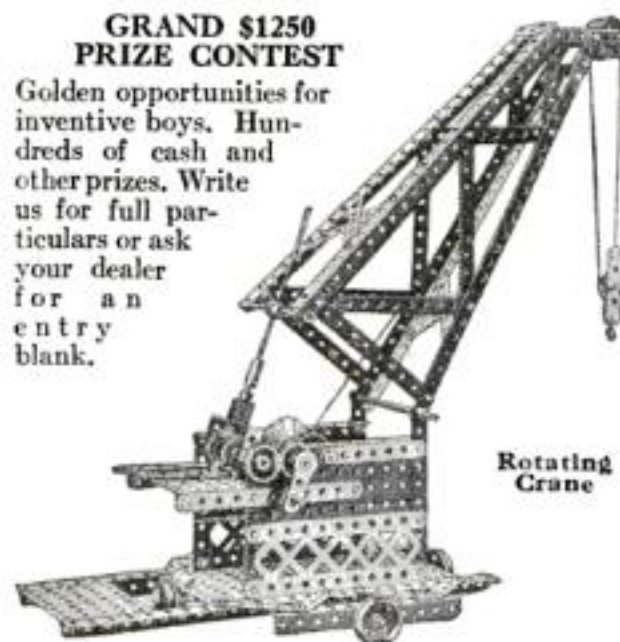

Rotating Crane

### GRAND \$1250 PRIZE CONTEST

Golden opportunities for inventive boys. Hundreds of cash and other prizes. Write us for full particulars or ask your dealer for an entry blank.



# "Static" Defeated and Loop Aerials Available to All

## Cotoco

TRADE MARK REG. U. S. PAT. OFF.

Our own results and those of hundreds of amateurs who are using COTOCO PRODUCTS have shown a reduction of "static" almost to the vanishing point. Radio Frequency amplification with the Cotoco tapped transformer is the reason. Will the set you make this Fall be static proof? And more good news. Loop aerials give ample range, great selectivity and all-in-the-house convenience.




### Cotoco Amplifying Transformer for Radio Frequency (Two Stage)

Cotoco Amplifying Transformer for Radio Frequency (Two Stage) Electrically and mechanically correct, as all Cotoco Products are. Can be mounted for two or three stages of amplification. You'll never be satisfied until you are getting the better results secured only through Radio Frequency Amplification with Cotoco tapped transformers.

### Cotoco Amplifying Transformer for Audio Frequency

Of unsurpassed efficiency for all kinds of amateur and professional work. Variation of audibility over a wide band of frequencies is negligible. Distortion? Forget it.

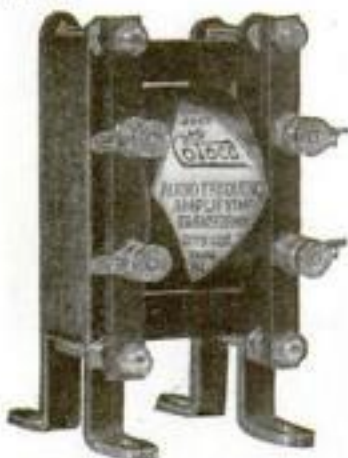

### Free Connection Diagrams

For two stage and three stage radio frequency loop aerial sets wrapped with every Amplifying Transformer for Radio Frequency.

If your dealer can't supply you, write us.

**COTO-COIL CO.**

87 Willard Ave., Providence, R. I.

### Cotoco Variable Air Condenser

Designed first and foremost to minimize electrical losses. Then built as a fine machine product.




### Cotoco Honeycomb Coils

Our first product. We were electrical coil makers long before the radio boom. Exhaustive tests prove these inductances to be without an equal. Mount on either fixed or trunnion brackets.

Economical

Compact

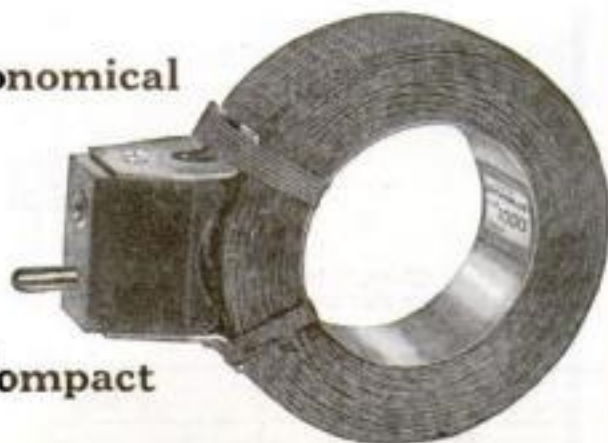


#### BETTER SHOP METHODS

### Holding Nine Pieces Instead of One in Hacksaw Vise


WE HAD considerable 1 15/16-in. cold rolled steel bars to saw into lengths on the power hacksaw, and in the beginning put only one piece at a time in the machine vise. This meant we were almost continuously opening and closing the vise and had to keep a man on this job alone.

A better plan was quickly devised. We placed nine pieces as shown and made a little block that fitted over the shafts and could slide on them. To the stationary jaw of the vise we screwed a strap that in turn held a screw with a handle, used for locking all nine pieces at one time. This speeded up the work and relieved one man for another job, as he attended to the hacksaw only in his spare time.—J. H. MOORE.



### Replacing a Defective Shaft

A SHAFT connected with an ordinary shaft coupling was found to have a fracture, as illustrated at A. We had to make a speedy repair in order to keep the machinery running, so we removed one

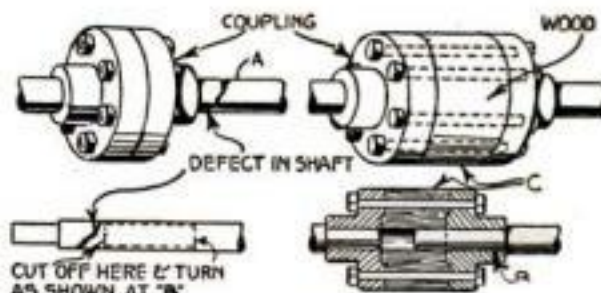

Oak filler block used between coupling flanges

half of the coupling and cut off the defective part of the shaft.


Then we turned down the end of the good shaft, as shown at B, and cut a round piece of good, tough oak to the shape shown at C.

This was placed over the turned-down end of the shaft with the half coupling.

Bolting the coupling together, we were ready to start the machinery again, for the oak block was the right size to make up for the length of shafting cut off. The view at C shows the shaft assembled.—H. J.

### Chiseling Off Rivet Heads

TO PREVENT elongating rivet holes in thin metal plates when rivets are removed, it is well to back up each rivet with a crowbar while it is being cut off with a

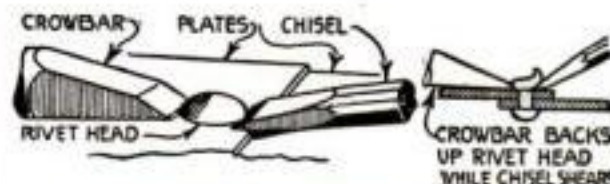

A method that prevents distortion of holes

cold chisel. The crowbar relieves the pressure of the rivets against the plates, and there is then no necessity for redrilling the holes when the plates are reassembled. If necessary, grind the point of the crowbar so that it will hold without slipping at the base of the rivet head.—G. L.



## BETTER SHOP METHODS

## Key Pins New Teeth in Place on Broken Gear

IN THIS method of repairing broken teeth in a gear or on the rim of an automobile flywheel, a stud made of cold rolled steel is first inserted, as shown. The diameter of the head of the stud should be nearly the width of the other teeth. The

TOOTH MADE FROM  
3/4" COLD ROLLED  
STEEL, CUT AND  
FILED INTO  
SHAPE



threaded end should be about one half that diameter.

The flywheel is then drilled, counter-bored, and tapped to suit the stud, which is screwed in place and locked by means of a pin driven into a hole that is half in the

rim and half in the stud. The face and flank of the teeth are then roughed out with a hacksaw and finished by filing. A template of tin can be cut out to fit one of the other teeth exactly and then used as a guide in perfecting the shape of the new tooth.

This repair is particularly useful in replacing one or more teeth on the starting gear of an auto engine flywheel.—J. H. T.

## Filing Awkward Shaped Pieces

HAVE you ever tried to file an awkward shaped piece or part that came almost level with the top of the vise? If you have, then, no doubt, you bruised your knuckles



This handle saves knuckles from being bruised

just as the writer did until he made the little file holder illustrated.

A groove is made to fit snugly over the tang of the file, and the handle, being above the level of the file, allows you to work without danger of bumping your knuckles. This is a stunt worth trying if you have much filing to do.—J. F. H.


## Drilling Cement and Brick

A HANDY tool for drilling holes in brick walls, which the writer has found more effective than the old-fashioned star brick drill, is made by shaping one end of a piece of octagon steel of the desired size and length to a fish-tail bit. Point the other end to fit the chuck of an ordinary brace, and then temper the tool.

Instrument men will find this a help in plugging brick walls for mounting telephones, or drilling through walls when laying cables.—EVERETT IDLOR.



NEW files should be reserved for finishing the larger surfaces of cast iron, bronze, or brass. When the file has worn somewhat, it can be used upon the narrow surfaces of these metals and upon wrought iron and soft steel. A used file is better than a new one for the latter class of work, because it is not so apt to tear the surface.—H. L. D.

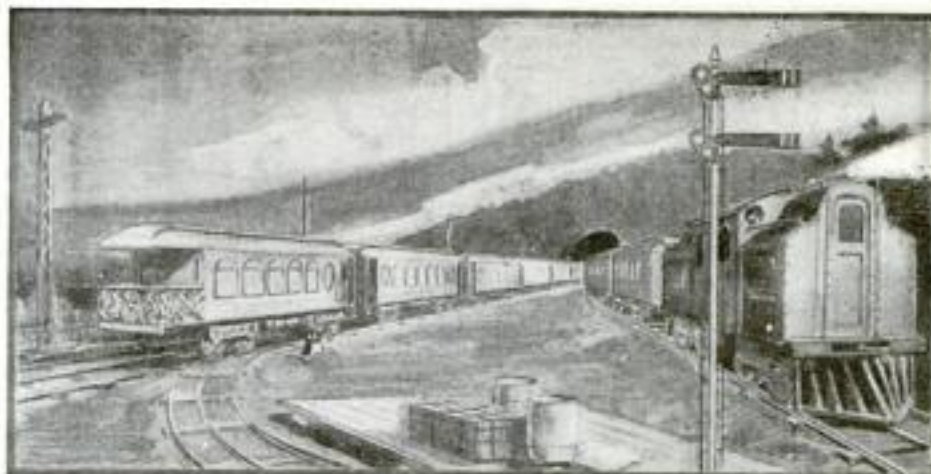

## Start the Joy Special



## On Your Lionel Electric Railroad

START your Lionel Limited with a touch of your finger. Send her on, now fast, now slow, backward or forward, stopping at stations, slowing down for signals, ringing automatic crossing warnings—golly, what a pack of fun, there is nothing like it in the world.



Lionel Electric Warning Signal is all-steel construction with heavily nicked gong. Bell rings when train passes over special section of track provided with it.



Lionel All-Steel Railroad Stations, with and without illumination, are made in three different models, providing the completing touch to your miniature railroad layout.



Lionel "Multivolt" Transformers operate all trains better and at minimum cost. Approved by National Board of Fire Underwriters.

Lionel locomotive and car bodies are of all-steel construction, hand-enameled, and baked like automobile bodies. For twenty-two years Lionel products have been "Standard of the World" because of their perfect electrical and mechanical workmanship.

You can run Lionel trains from any electric light socket with Lionel "Multivolt" Transformers or from dry or storage batteries.


Lionel Electric Trains are made in America and sold by department, toy, sporting goods, hardware and electric stores. Long, satisfactory life is guaranteed your outfit by the high quality of Lionel materials and skilled workmanship. Say "Lionel" to your dealer.

Send at once for the handsome 40-page Lionel Catalog. The complete line is shown in beautiful four-color illustrations—chock-full of outfits and all kinds of up-to-date railroad accessories.

## THE LIONEL CORPORATION

48 "D" East 21st Street

New York City

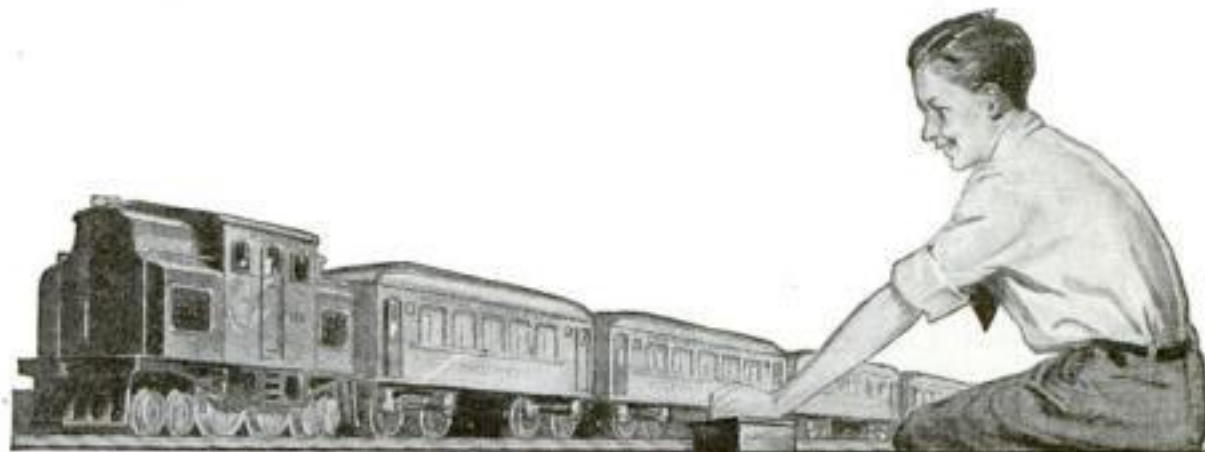

**LIONEL ELECTRIC TOY TRAINS**  
& Multivolt Transformers



## FREE-This Book on Home Beautifying



This Book explains how inexpensive soft woods may be finished so they are as beautiful and artistic as hard wood. Tells what materials to use and how to use them. Includes color charts—gives covering capacities, etc. It is the work of experts—beautifully illustrated in color. Fill out and mail this coupon for a free copy.

S. C. JOHNSON & SON, Dept. PS 11, RACINE, WIS. (Canadian Factory—Brantford)

Please send me free and postpaid your Instruction Book on Home Beautifying and Wood Finishing.


The best dealer in paints here is.....

MY NAME.....

MY ADDRESS.....

CITY & STATE.....

## You Can Add Those Artistic Touches

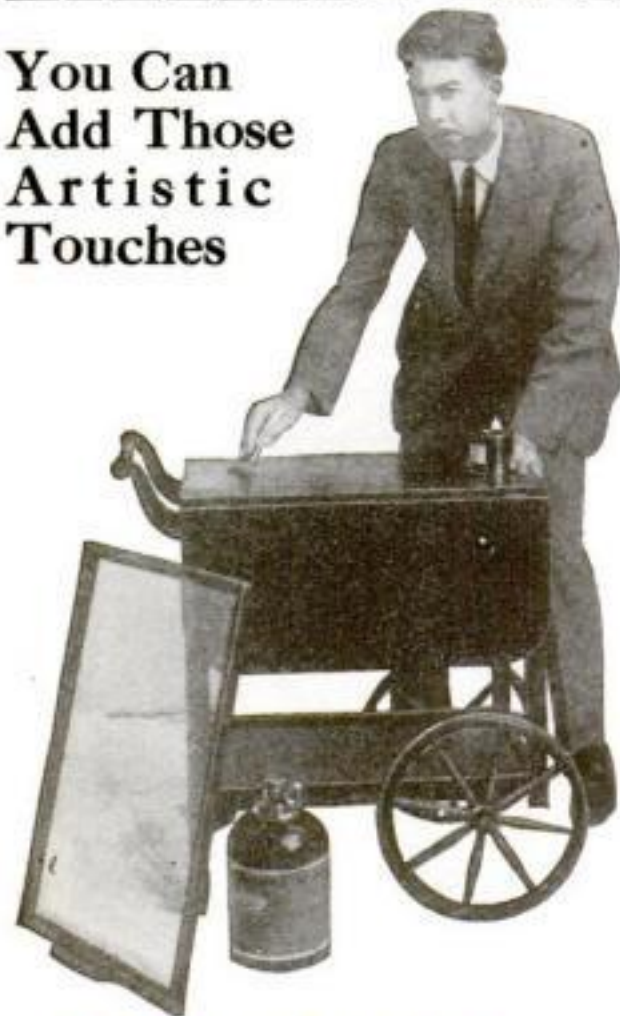

## JOHNSON'S WOOD DYE

Johnson's Wood Dye is very easy to apply—it goes on easily and quickly, without a lap or a streak. It penetrates deeply, bringing out the beauty of the grain without raising it—dries in four hours and does not rub off or smudge. Made in fourteen beautiful shades.

S. C. JOHNSON & SON, Dept. PS 11, Racine, Wis.  
"The Wood Finishing Authorities"



## The Home Workshop

### Make a Tea Wagon at Half Store Prices


relieve the otherwise straight lines. A plain top is screwed on from underneath and the usual wheels and casters are added. Two tray handles are fastened to the top to

(Continued from page 78)

the wooden frame, the supplies necessary are 1 lb. of No. 4 reed for braiding the edges of the frame and  $\frac{1}{2}$  lb. of No. 3 reed for weaving the tray base, as well as glass

for the tray, and if desired, for the lower shelf.

Another simple type of tea wagon without leaves or turned legs is shown in No. 8. The omission of the leaves makes it possible to provide a roomy silver drawer. In

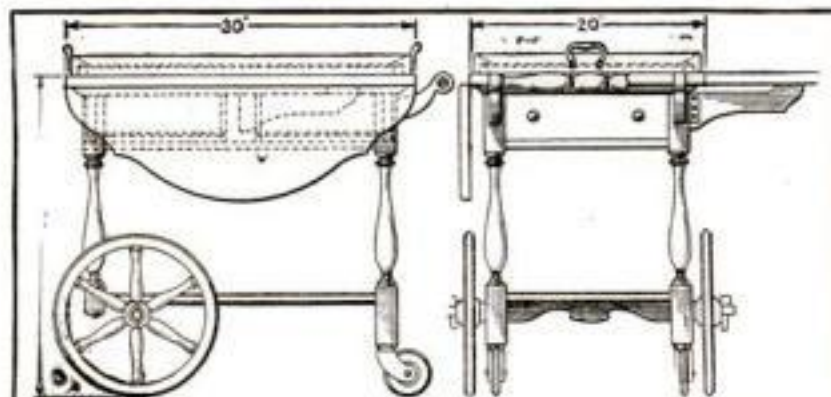

Side and end views of the tea wagon designed by the Home Workshop Department. The full size details and the bill of materials are contained in Blueprint No. 13 of the Home Workshop series

tea wagons with leaves a small drawer is often provided, and sometimes there is a drawer in both ends. The tray handles in this case are made of wood in a style much favored by some furniture designers and craftsmen.

Number 4 is a design with turned legs, having an inclosed shelf directly beneath the top, upon which the tray can be placed when not in use. The tray is a trifle smaller than the top of the tea wagon. The leaves in this case, as in No. 2, are semicircular.

The mahogany tea wagon with a simple inlay on the rails and legs illustrated at No. 5, is unusual because the legs are set on an angle and no casters are provided for the longer ones. The wheels are extra large; they should be 18 in. in diameter, if possible, and very light in construction and design. The tray is a trifle smaller than the table top.

Number 6 is another unusual design, rather ornate in appearance, but not difficult to make, since both the legs and the large wheels are cut out with a band, jig, or fret-saw.

The reed tea wagon, shown at 7, is a type now much in favor. It is comparatively inexpensive and not at all difficult to make. A frame 16 in. wide, 24 in. long, and 30 in. high can be made as a foundation for the reed, or one already bored for the binding can be purchased from dealers in basketry supplies. Besides

tea wagons with leaves a small drawer is often provided, and sometimes there is a drawer in both ends. The tray handles in this case are made of wood in a style much favored by some furniture designers and craftsmen.

Number 10 is an electrified tea wagon, fitted with a double outlet for attaching an electric coffee urn, chafing dish, toaster, or stove. A length of lampcord plugged in underneath the tea wagon runs to a baseboard outlet or the nearest available light socket.


The majority of tea wagons have turned legs and these and any other turnings required, such as handles, can readily be

obtained by any one who has access to a lathe or cares to go to the moderate expense of having the work done by a wood-turner. If you have your own lathe, you can make even the wheels, which provide a particularly interesting problem in wood turning.

In place of special turnings, stair balusters

can be used. If they are old fashioned ones, they may have more or less individuality in design and serve fairly well as legs, but modern mill-made balusters are often spindly and inappropriate for furniture.

The legs do not, however, have to be

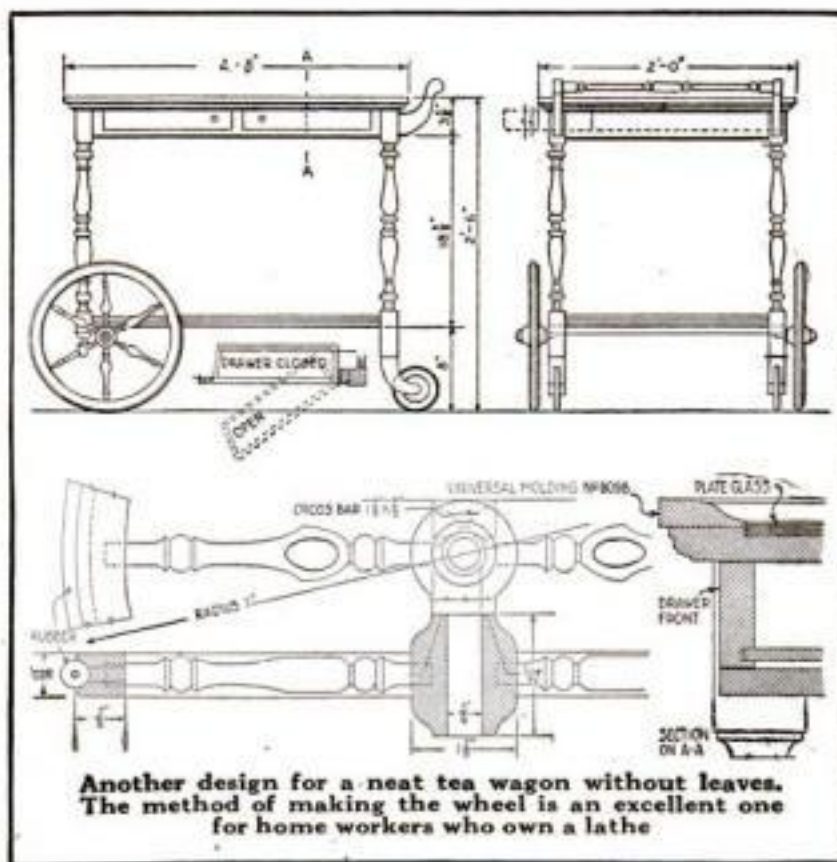

Another design for a neat tea wagon without leaves. The method of making the wheel is an excellent one for home workers who own a lathe




## THE HOME WORKSHOP

## How to Make a Tea Wagon

(Continued from page 90)

turned. They can be plain and straight, or have the edges slightly rounded or chamfered, or they can be made with decorative edges and "voids" in fret-saw fashion.

Tea wagon wheels can be purchased from dealers in manual training supplies and from some stores handling baby carriage wheels; furniture stores often will obtain them on order. A wheel that is regarded more or less as standard is 16 in. in diameter with a  $\frac{3}{8}$ -in. rubber tire. The spokes are

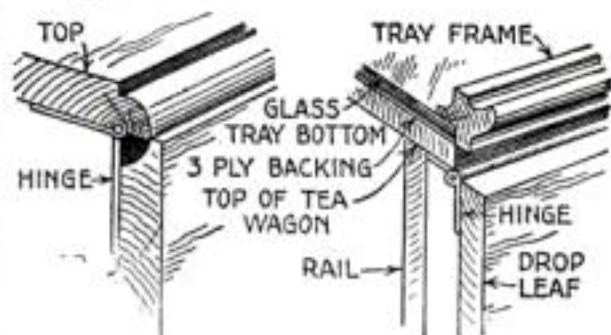

Tray molding, handles, and other tea wagon details

turned as shown and have ornamental flats. The axles are usually about  $17\frac{1}{2}$  in. between the hubs, but they can be cut in half and attached separately to accommodate the wider wagons. These wheels are usually made in mahogany, oak, or gum, the latter taking a good imitation mahogany finish. Baby carriage wheels can, of course, be substituted.

Casters can be obtained without difficulty. They usually have rubber tired wheels 3 in. in diameter and about  $\frac{1}{2}$  in.

(Continued on page 92)

## Coupon for Ordering Blueprint

Blueprint Service Dept.  
Popular Science Monthly  
225 West 39th St., New York

GENTLEMEN:

Send me the blueprint, or blueprints, I have checked below, for which I inclose . . . cents in stamps or coin:

No.	Title	Price	
1.	Sewing Table . . . . .	25c	<input type="checkbox"/>
2.	Smoking Cabinet . . . . .	25c	<input type="checkbox"/>
3.	Book Trough End Table . . . . .	25c	<input type="checkbox"/>
4.	30-ft. Monoplane Glider . . . . .	50c	<input type="checkbox"/>
5.	Kitchen Cabinet . . . . .	25c	<input type="checkbox"/>
6.	V.T. Radio Receiving Set . . . . .	25c	<input type="checkbox"/>
8.	Shaving Cabinet . . . . .	25c	<input type="checkbox"/>
9.	Arbor with Gate and Seats . . . . .	25c	<input type="checkbox"/>
10.	Porch Swing . . . . .	25c	<input type="checkbox"/>
11.	Bench and Tilt-Top Table . . . . .	25c	<input type="checkbox"/>
12.	Electric Washing Machine . . . . .	25c	<input type="checkbox"/>
13.	Tea Wagon . . . . .	25c	<input type="checkbox"/>

Name . . . . . (Please print)

Street . . . . .

City and State . . . . .

"BUILD OF CYPRESS  
the 'Wood Eternal'  
AND YOU BUILD  
BUT ONCE"



## "If Your SILLS Rot What Have You Got?"

Why not build your Garage, sills and all, of Cypress, "the Wood Eternal,"—the lumber that *don't* rot? But of course you must make sure that you build of genuine "TIDEWATER" Cypress. How to be sure? Insist on seeing the arrow trade mark, shown below, on every board or bundle.

While you are about it, why not write right away for Volume 28 of the world-famous Cypress Pocket Library? (That "guide, counselor and impartial friend of every home-lover.") It will come promptly on request, with our compliments. It contains not only full size working drawings and complete specifications for the garage (which you can amplify to suit your needs as to space), but also many plans for pergolas and other home beautifiers. We leave it to you to positively insist on Cypress, "the Wood Eternal" when you order your lumber. You will do so for your own sake. (And it must be admitted that is a sufficient motive.)

Vol. 28 is the "Trellis, Arbors and Pergola—Garage" Book. 88 pages; many interesting pictures. 23 full-size working drawings with specifications. 1 special "Vines to Plant—What, When and Why" supplement. FREE on request. Write.

## SOUTHERN CYPRESS MFR'S. ASSN.



1249 Poydras Building, New Orleans, Louisiana  
or 1249 Graham Building, Jacksonville, Florida



Insist on **TRADE-MARKED CYPRESS** at your local lumber dealer's. If he hasn't it please advise us promptly and we will see that you are supplied.



# THE FLORSHEIM SHOE



THE ORMOND—STYLE M-101

AFTER you have worn Florsheim Shoes you can truly appreciate the satisfaction—the extraordinary endurance—underlying their refined, graceful appearance

The Florsheim Shoe—Most Styles \$10

BOOKLET "STYLES OF THE TIMES" ON REQUEST

Look for Name in Shoe

THE FLORSHEIM SHOE COMPANY

Manufacturers • CHICAGO



FOR THE MAN

WHO CARES

## The Ideal Tuner for Popular Broadcast Reception

The new ABC Tuner No. 5750, illustrated below, meets the demand for a quality tuner at a very low price.

Designed by Professor Morecroft of Columbia University, and manufactured complete in our own factory, this tuner is technically correct, thoroughly dependable, and embodies the most recent developments.

ABC Tuner No. 5750 has for its principle feature a very efficient vario-coupler of radically new design, together with two ABC 21-plate condensers.

Note how perfectly this tuner fits in with other ABC Units—a complete receiving station giving you full command of broadcast programs.

Write us for latest ABC Catalog and name of nearest dealer

**JEWETT MANUFACTURING CORP.**  
342 Madison Ave. Dept. C11 New York



ABC Radio Tuner  
No. 5750

ABC Detector and  
One-Step Amplifier  
No. 5013

ABC Two-Step  
Amplifier  
No. 5014



ABC Loud-Speaker  
No. 5500

### "Best Ideas" of Readers Win Home Workshop Prizes

A FIRST prize of \$15 and a second prize of \$10 are awarded each month for the best ideas published in the Home Workshop Department. These prizes are given in addition to the regular rates paid for contributions and are, therefore, a bonus for especially good suggestions.

Any ideas that have helped you in your own home workshop or aided you in repairing or improving your home are apt to be of value to other tool users and are possibly prize-winning material. If you will describe them briefly and send them to the Home Workshop Editor, POPULAR SCIENCE MONTHLY, 225 West 39th Street, New York, they may deserve one of the awards.

The articles should be accompanied either by photographs or pencil sketches to make clear the details of construction.

The prizes for November have been awarded as follows:

**FIRST PRIZE, \$15: Paul H. Byer, Hagerstown, Md.,** for a description and the working details of an automatic heat regulator (see page 103).


**SECOND PRIZE, \$10: John A. Mahon, Baltimore, Md.,** "Auto and Phonograph Horns Combined to Make Loud Speaker" (see page 122).

### How to Make a Tea Wagon

(Continued from page 91)

thick. Some are solid and others have small spokes. Ordinary casters will serve the purpose, but are not as neat.

Although wooden handles are frequently used on the trays, metal tray handles are sold in many varieties of shapes, sizes, and finishes. Some tea wagons with drop leaves have a tray handle in place of the conventional turned wooden handle, and there is a certain advantage in this because

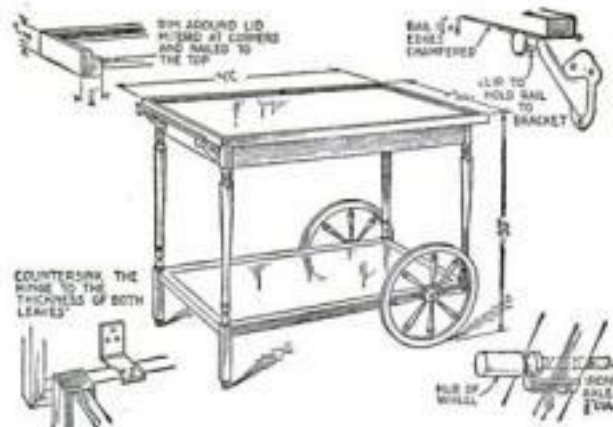

Oak tea wagon made by Frank W. Shultis, of Lansing, Mich. Top, which is hinged, covers silver compartment. Table leaf hinges with extra holes are used so that top will stand open. Handle is supported by brass hand-rail brackets

the smaller tray handle is not so much in the way when the tea wagon is being used as a luncheon table. A craftsmanlike way of providing handles is to make them of hammered brass or copper.

The regular large wooden handle can be disposed of when the wagon is used as a table if some simple arrangement is made to swing it below the end rail.

Tray moldings are made in a wide variety of styles and can be obtained easily.




## THE HOME WORKSHOP

## Drill Block Prevents Breakage of Small Hand Taps

TO TAP a small hole in a piece of metal held in a vise without breaking the tap or cutting the thread out of square requires much skill and care. When the tap reaches the bottom of the hole, the resistance is hardly felt and yet the smallest fraction of a turn often breaks the tap.

This difficulty can be eliminated if a piece of cold rolled steel  $\frac{5}{8}$  or  $\frac{1}{2}$  by 1 by 6

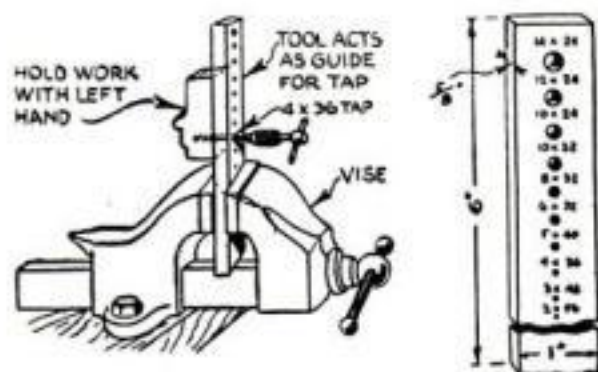


The tap guide and how it is used

in. has a number of holes drilled through it to suit the different sizes of taps ordinarily used. The piece is held vertically in the vise and the tap is placed in the proper hole. The work to be tapped is held in the left hand against the flat side of the fixture and tapped in the usual way. It will be tapped perfectly true and as soon as the tap reaches the bottom of the hole the strain will be felt before there is any danger of the tap's breaking.—ARTHUR E. SCHOLZ.

## Steel Square and Plumb Bob Form Serviceable Level

A SERVICEABLE and unbreakable level can be made with a steel square, a plumb bob, and a piece of hardwood. Saw a long notch in one end of the stick and a short notch in the other end and bore a hole through at the long notch. Insert a bolt with a wingnut to clamp the bar to the square, as shown. The device can then be used in place of a spirit level on horizontal surfaces by observing the deflection of the plumb bob in relation to the scale.—J. G.

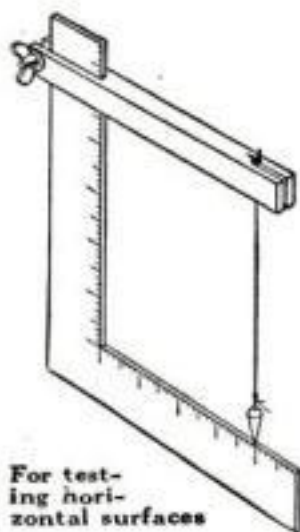


## Carrying Large Sheets of Glass, Veneer, or Cardboard

TO CARRY sheets of glass, veneer, cardboard, and other flat, unwieldy objects, make a light-weight wooden rack as shown. A series of cross pieces afford a



choice of hand grips; they make it unnecessary to strain the arm down to the bottom of the sheets.

Strips of felt may be glued to the parts of the rack that come in contact with the glass.—C. NYE.

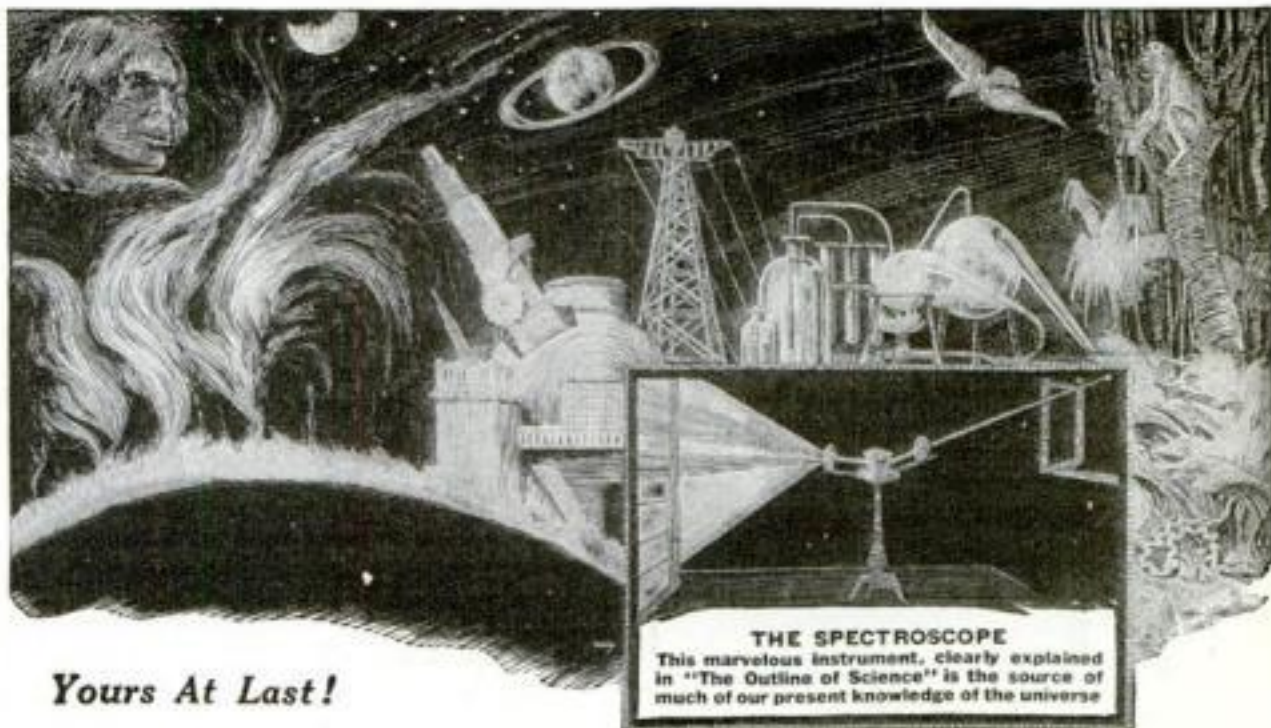

Yours At Last!

## The Most Amazing Story Ever Written

Revealing the Wonderful Secrets of Science  
See for Yourself—In Your Home—FREE

Come out of the humdrum of daily life into a marvelous new world—where you can lift your eyes and read the story of the heavens, see into the depths of earth and ocean, view the activities of invisible life, look back to the dawn of mind, watch man as he overcomes the thrilling mysteries of life and time and space.

Here, truly, is the most amazing story ever written—for it reveals to you truths of what man has accomplished that go beyond the wildest flights of imagination; it takes you into the startling realms of science and shows you simply and clearly the marvels that have heretofore been so vague and mysterious.

## THE OUTLINE OF SCIENCE

Edited by J. Arthur Thomson, Professor in the University of Aberdeen, Scotland

covers in one flowing, non-technical story all scientific achievement since the world began. You read the absorbing history of Evolution in the Light of Today—The Ascent of Man—How Darwinism Stands Today—The Romance of the Heavens—Other Worlds than Ours—The Moon—The Sun—Evolution of the Stars—Life on Mars—Sun Spots and Magnetic Storms on Earth—The New Knowledge: Wonders of the Atom—The Discovery of the Electron, the Wonderful Thing Which Has Revolutionized Our Ideas—The X-Ray—Radium and Its Wonders—The Marvels and Mystery of Electricity—Wonderful Instincts, Devices, and Adaptations of Animals and Birds—Animal Mimicry, Camouflage and Migration—Animal Intelligence—The Dawn of Mind—The Life of Bees, Ants and Other Insects—The Human Body—New Discoveries—The Plant World and Its Marvels—The Wonders of Deep Seas, of Seashores, and of Rivers—The Story of the Rocks—Biology and the Beginning of Life—All About Bacteria—Marvels of the Invisible World—Wireless Telegraphy—Wonderful Scientific Instruments—The Mind of Man and the New Psychology—Psychic Research—and all the other almost unbelievable discoveries man has made. Small wonder that this work has been hailed as the greatest publishing event in many years and is being eagerly read by scores of thousands.

Nearly 1,000  
Splendid Illustrations

add to the value of this set—photographs, drawings, diagrams—many in full color, forming in themselves a most interesting collection of scientific material. The four large, handsome volumes give you the world's highest scientific authority—in the form of a plain story simply told. It will fill an important place in every home.



Four handsome volumes—beautifully bound, gold stamped. Nearly 1,000 illustrations. Each volume 7½ by 10½ inches and 1¼ inches thick

## Get It On Approval—

Pay Practically at Your Convenience

You may have these four superb volumes in your home for five days' examination before you pay a single dollar. If you decide not to keep them, send them back and be under no further obligation. If you keep them, make a first payment of \$1 and nine monthly payments of \$2.00—\$19.00 in all—or one cash payment of \$18.00. Send the attached coupon and see for yourself the entertainment and instruction that is here for you.

G. P. PUTNAM'S SONS  
Dept. 131, 2 West 45th Street, New York

This Coupon  
Brings the Whole Set on Approval

G. P. PUTNAM'S SONS,  
Dept. 131,  
2 W. 45th Street, New York

Send me, on approval, *The Outline of Science* in four large volumes, handsomely bound, with nearly a thousand illustrations. I may, if I wish, return the set in five days and owe you nothing. If I keep it I will send you either \$18.00 in full payment or \$1.00 as a first payment and \$2.00 a month for nine months.

Name .....

Address .....

Occupation .....



# ERLA

## DEPENDABLE RADIO PRODUCTS


ERLA products lead radio development, do not merely follow it. Their efficiency and exquisite finish are giving them preference everywhere. For maximum results and permanent good looks, insist on ERLA products.



Voice and music a thousand miles distant are heard perfectly through loud speaker with only one ERLA radio frequency transformer. Its efficiency is unequalled. Made in 3 types. Each.....\$6.00



ERLA Bezels improve the appearance of any receiving set 100%. They are beautifully made of heavily nicked brass. Telescoping rim gives perfect fit of 1 1/4" hole in 3/8" to 1/2" panels. Each.....20c

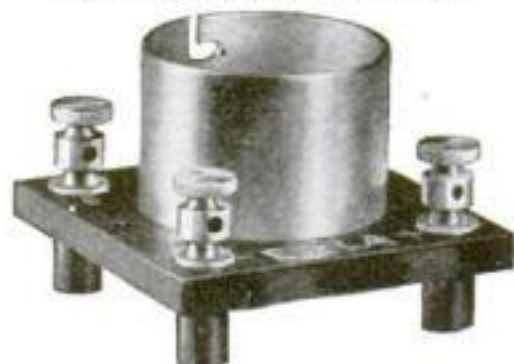

The most beautifully finished and best made socket on the market. Heavily nicked shell on polished Radion base. Insulated hard rubber feet. Special binding posts. Fits any 4-prong tube.....\$1.00



The ERLA phone plug is instantly connected or disconnected without tools or cutting or changing the phone tips in any way. Handle of polished fibre, with all parts heavily nickel plated.....\$1.00

On sale by first-class dealers. Or send us your order direct, with your dealer's name. Special proposition to jobbers.

Electrical Research Laboratories  
Dept. G 2515 Michigan Ave., Chicago

## Aerial Yachtsmen

(Continued from page 27)

The longer the duration of the gust, the better.

During the period of increasing wind velocity, a pilot should turn his sailplane head on to the wind and should steadily gain height. In the second period, he should turn at right angles to the wind (the machine usually loses some height during this period). At the beginning of the third period—of decreasing wind speed—the machine should be turned tail to the wind. Since its speed is relatively greater than that of the wind at diminishing velocity, it is possible for the machine to gain height. During the period of minimum speed the pilot should again turn at right angles to the wind.

Compare this thrilling method of flight, in which the air offers a constant challenge to the pilot's ingenuity and resourcefulness, and in which he must depend for his motive power solely on his skill in "outguessing the winds" with the power plane flights in the recent Pulitzer contests at Detroit, Mich., in which the pilots, by merely watching dials and pulling levers, had instant command over power, speed, and direction. Such a comparison reveals the challenging nature of the fascinating new sport of air sailing.

## Qualities an Air Pilot Needs

The most necessary qualities for a pilot in soaring flight are knowledge of the structure of the wing and ability to recognize in advance the nature of gusts. This quality might be called "seeing the air." Some air-plane pilots fight the air; others ride it. The pilot of the plane in which I flew as passenger from New York to Omaha in October, 1921, used the air gusts to gain altitude and would catch the gusts under the wings and let them buoy up the machine for several hundred feet at a time. He followed the trends of wind instead of fighting them as some fliers do. A motor machine flies best in still air or with favoring winds; a sail-plane must have gusty and strong winds, and its pilot must "feel" what to do with them, just ahead of time.

A gust of wind is in reality a wave of air. If you learn how to keep your sailplane in the front side of a high wave, you will glide downhill for miles, just as a canoe with a wave at its stern will be carried along a river. But waves of air are not always what they seem. Sometimes, while there is a blanket of still air just over the earth's surface, swift air currents move above the calm. I have been in a balloon the bag of which was being carried along by one of these upper currents so swiftly that from the car beneath it seemed as if a strong wind were blowing against our faces, yet in reality the car was moving in the layer of still air.

## How the Birds Do It

Experiments show that birds seem to "feel" their way through the air and to sense strength and direction of the wind. This may lead to the invention of sensitive anemometers combined with wind vanes, mounted on antennae, or of "feelers" projecting far in front of the sailplane of the future, to warn the pilot of the direction and relative strength of wind gusts.

Although the pilot is all important in air sailing, the machine, of course, must be very responsive to control, with sensitive rudders, elevators, and ailerons.

2000 ohms \$6  
3000 ohms \$7



A photograph showing the heart of the Manhattan Radio Headset—the coils and the magnet.

## It's What's Inside the Receiver Case that Counts

Remove the cover of a Manhattan Radio Headset. Note the large horse-shoe magnet. It is made of Tungsten Steel—the most expensive material for permanent magnets, and the best because of its hardness and property of retaining magnetism indefinitely.

In the center of the case is the electro-magnet with its pole pieces made of Silicon Steel. Energy received from a wireless message is exerted on the diaphragm through the pole pieces. If the pole pieces absorb any of this energy, the pull on the diaphragm is less and the performance of the Headset weakened. Silicon Steel pole pieces cut down energy loss, and give strong signals.

These are two points in the interior construction of Manhattan Headsets which make for superiority.

Look for the Manhattan Headset box on your radio dealer's shelf. It's illustrated below. All genuine Manhattan Radio Headsets may be identified by the "M" Seal Flash on the back of each receiver case. It's your guarantee of quality.

**MANHATTAN**  
ELECTRICAL SUPPLY CO., INC.  
*Makers of the Famous Red Seal Dry Batteries and Manhattan Headsets*

NEW YORK  
17 Park Place  
ST. LOUIS  
1106 Pine St.

CHICAGO  
114 So. Wells St.  
SAN FRANCISCO  
604 Mission St.



Next month we will tell you more about the "heart of the Manhattan Headset."




## THE HOME WORKSHOP

### Brackets Support Vacuum Tube Platform in Radio Cabinet

A NEAT and inexpensive method of mounting a platform for vacuum tubes in a radio cabinet is to support it from brackets on the panel and the back of the cabinet, as illustrated. This has an advantage over the usual U-shaped support because of the ease with which soldered connections may be made between rheostats and other parts below the platform that often are difficult to get at.

With this design the entire under side of the platform is free and it may be adjusted

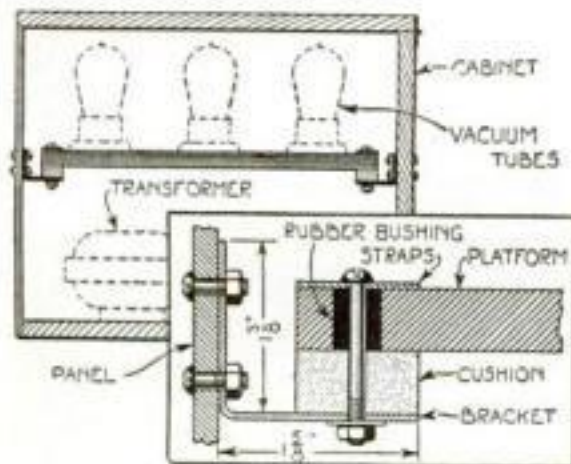

This mounting leaves space clear under tube platform and makes it easier to solder connections

to any height to suit the transformers used, if they are to be placed in the usual position under the tubes. Cushions of soft rubber are placed between the brackets and the platform, which is insulated entirely from the retaining screws by means of rubber bushings and straps made of fiber, hard rubber, or composition.

When the mounting has been prepared, the platform can be removed while the vacuum tube sockets are fixed to it, and then the whole replaced as a unit. If the transformers are attached to the under side of it, the soldering of the connections between tubes and transformers also can be done before finally fastening the platform in place.—CHARLES F. LANOUE.

### Nail Forms Handle for Cork


CORKS in varnish cans and other containers often fit flush and are very difficult to remove. This is particularly annoying when small quantities of the liquid contained in the can are required at frequent intervals.

One of the simplest methods of providing a handle for the drawing of such corks is to drive a wire nail through the cork from the under side and bend the point at an angle to give a finger grip.—J. M. PIPP.



### Removing Rust from Nickel Plate

RUST spots on nickel surfaces may be removed by rubbing the parts thoroughly with hard oil or vaseline. Allow oil to remain for several days if possible; then wipe clean with a cloth soaked in ammonia. If the spots do not yield to this treatment, add several drops of hydrochloric acid to the ammonia. After applying the solution, dry at once, then rinse with water, dry again, and polish.—DALE R. VAN HORN.

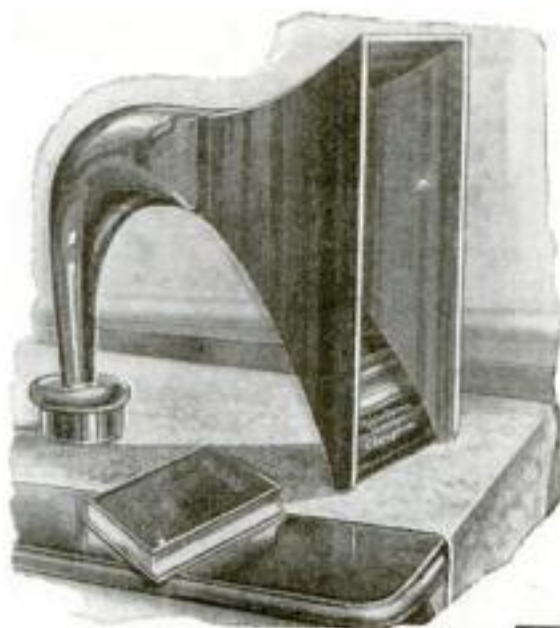

## This Amazing Radio Feature

means radio enjoyment for the entire family  
at a price within the reach of all

YOU who know radio equipment know the Baldwin Phone. You know its war record.

The Government commandeered the Baldwin factory during the war to assure Baldwin Head-Sets for War Vessels and Army and Government Stations.

Where exacting work is done there you find Baldwins.

Now this amazing phone is available to the public in the Master-Baldwin "Throatype" Clarophone, the newest and most perfect speaker.

### A Clearspeaker

The Master-Baldwin is not a so-called "loud" but rather a clearspeaker, which enables a roomful of people to hear every word or note.

—hear perfectly every sound, every overtone, even the harmonics. No rasping, buzzing, breaking or any noises save those caused by your receiving set. —hear clearly and distinctly throughout the average size room any broadcasting that your set will pick up.

No changing of a head-set from one to another. No one misses part of the program.

Now you can really enjoy radio with the Master-Baldwin "Throatype" Clarophone.

### Two Secrets of Its Perfection

One secret of this instrument is a marvelous mica disk, unaffected by heat, cold or electric currents, which is actuated in both directions by an armature tone-arm superimposed in a magnetic field.

The other is a specially designed speaker, which follows almost exactly the shape of Caruso's throat.

And its rectangular mouth follows the principle which opera singers know and use to get full resonance from the roof of the mouth.

So the Master-Baldwin "Throatype" Clarophone follows scientifically a perfect model.

### Unequalled Low-Priced Offers

The Master-Baldwin "Throatype" Clarophone, complete . . . \$22.50  
Described below.

The Master-Baldwin Head Phone . . . \$ 9.00

The new and improved Baldwin Phone. Is sufficient for all except code work. One does the work of two ordinary phones.

The Baldwin Head-Set . . . \$16.00  
The standard supersensitive head-set for those who want the double phone.

It gives you the best from your receiving set.

### \$22.50—An Amazing Price

The wonderful Clarophone costs but \$22.50, complete. So everyone may have one.

Simplicity of design and large scale production account for this revolutionary price on an instrument which is the highest quality the world affords.

### Try It at Our Risk

We make you the judge. Test it 10 days. Attach it to your set. Compare with others. We know you will be delighted.

If not pleased, return it to your dealer and get your money back.

Ask your dealer for the Master-Baldwin "Throatype" Clarophone.

If he hasn't it order from us, inclosing \$22.50. We'll ship your Clarophone immediately, charges prepaid. (Reference: Citizens National Bank, Los Angeles, Calif.)

Know the real joys of radio. Get this necessary equipment at once.

Master Radio Corporation,  
Dept. 5011, 631 So. Spring St.,  
Los Angeles, California.

**The Master-Baldwin**  
"Throatype"  
**Clarophone**

Send this if your dealer cannot supply you.

Master Radio Corporation,  
Dept. 5011, 631 So. Spring St.,  
Los Angeles, California.

Enclosed is \$22.50 for one Master-Baldwin "Throatype" Clarophone, charges prepaid. My money will be refunded if I return the instrument within 10 days to you, in case I am not satisfied.

I buy my radio equipment from

(DEALER'S NAME) .....

(Address) .....

(YOUR NAME) .....

(Address) .....



# Balances in your hand as naturally as a Colt .45

Here's an "eye-opener" for the man who has always used the old style frame. A well designed, substantially built hack saw frame has a perfect "hang"—takes any length of blade from 8 to 12 inches and can be set to cut in four directions without removing the wingnut. A constant tension on the bolts holding the blade and a positive adjustment on the tubular back saves cuss words and much valuable time when changing blades. Hard rubber checked handle and stream line design. A Hack Saw Frame you will always swear by—never at.

Ask for *Starrett Pistol Grip Adjustable Hack Saw Frame No. 169*. You can get it at almost any hardware store.

Write for Catalog No. 22 "W" and the Supplement describing the new Starrett Tools.

## THE L. S. STARRETT CO.

The World's Greatest Toolmakers  
Manufacturers of Hack Saws Unexcelled  
ATHOL, MASS.



The Starrett Hack Saw Chart and "Hack Saws and Their Use" (a standard reference book on the subject) will be sent free on request



# Use Starrett Tools



## for speed— The Bausch & Lomb TESSAR LENS

**F**AST though the half-back may be, the Bausch & Lomb Tessar gets him on the run, clearly and sharply, not blurred. For speed work the Tessar is unsurpassed. And on cloudy days or indoors, it makes possible snapshots where or-

dinary lenses require time exposure.

Made by America's greatest optical house, the Bausch & Lomb Tessar is unsurpassed by any other anastigmat lens in the world.

Tessar is the lens for both amateur and professional.

Write for booklet, "What Lens Shall I Buy?" describing our complete line of anastigmat lenses.

## BAUSCH & LOMB OPTICAL COMPANY


600 St. Paul Street, Rochester, N. Y.

New York Washington Chicago San Francisco London  
Leading American makers of Stereo-Prism Binoculars, Telescopes, Photographic Lenses, Projection Apparatus (Balopticons), Microscopes, Magnifiers, Automobile Lenses and other High-Grade Optical Products.

### THE HOME WORKSHOP

#### Antenna, for Use in Towns, Attaches to Clothes Line

**R**ADIO fans who live in upper apartments or flats where old-fashioned pulley clothes lines are used, can install an aerial with very little difficulty. The first step is to obtain a large, empty wooden reel and make a bracket for it, so that it can be fastened to the window or back porch near the clothes line. Fasten an eye and about 6 in. of strong cord or light rope to the reel. Tie an insulator to the end of the cord and

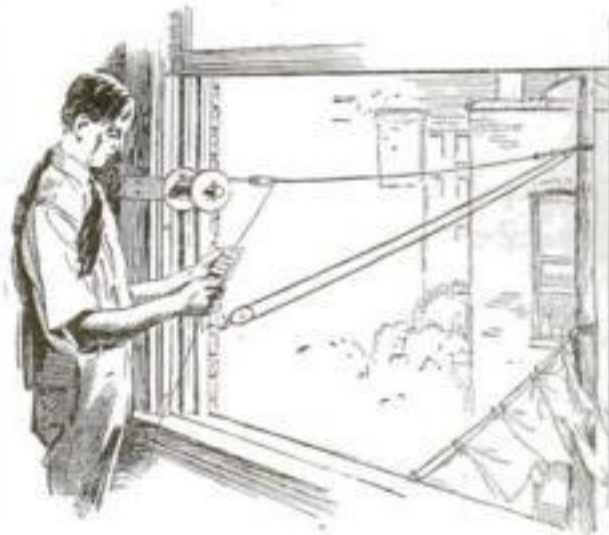


Since this antenna is withdrawn when not in use, there is no lightning hazard nor possibility of static discharges when the set is first connected

connect with the insulator the antenna wire, allowing a short end sufficient to serve as a lead-in.

At the farther end of the aerial wire place another insulator, 6 in. more of cord, and a third insulator, which is to serve as a stop when it comes in contact with the pulley on the clothes-line pole. To erect the aerial, it is merely necessary to attach this last insulator to the clothes line and pull it out as far as it will go. The antenna can be as quickly withdrawn when it is no longer needed.—P. A. DASCHKE.

#### Light Bench Clamp Useful in Holding Radio Parts

**S**MALL work on radio apparatus and electrical instruments often can readily be handled in a bench clamp made as shown, from materials to be found in most scrap boxes. The body of the clamp is a piece of flat steel, about 3/16 in. thick, 2 in. wide, and 12 in. long. The ends are bent in to form the jaws and the center of the

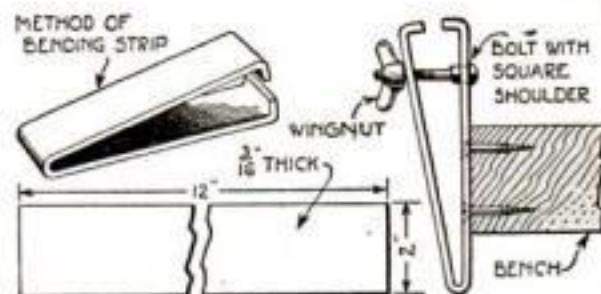

A handy vise for small metalwork

strip is turned sharply to bring the ends within 1 in. of each other.

Countersunk holes on one side are provided for the screws with which vise is fastened to bench. A stovebolt passes through holes drilled in the sides of the body opposite each other and a wingnut serves for setting the jaws on the part to be held. The elasticity of the steel opens the jaws when the work is to be removed.—G. A. LUERS.



## Germes from Other Worlds

(Continued from page 41)

similar to our own has been very lately disputed, as a result of remarkable observations at the observatory on Mount Wilson, Calif., where spectroscopic studies are said to have revealed no trace of water vapor or oxygen around the planet. On the other hand, some observers advance evidence to prove that there are heavy clouds hanging about Venus, and that her temperature is comparable to Earth's.

So the scientific debate stands to-day, and meanwhile, the possibility of radio communication with the other planets—provided there are indeed living beings upon them—has made this whole discussion one of the greatest popular interest, while the discussion itself has aroused an intense renewed interest in the original theory of Arrhenius as to the spread of life spores throughout the universe by light rays.

Space is, according to Arrhenius, filled with shoals of living "seeds," and occasionally spores of bacteria, which settle upon Earth and other planets and commence life in those worlds where conditions are suitable.

### Sunlight Composed of Light Corpuscles

This theory is strengthened by the belief that sunlight is composed of minute "light corpuscles"—bits of matter that are being incessantly radiated from the Sun. That side of Earth turned toward the Sun is being continually bombarded by untold billions of these light corpuscles. Though in size extremely minute, yet they are numerous enough to exert a "push" upon our globe, in opposition to solar gravitation, equivalent to 75,000 tons.

Many of the particles of dust occupying interplanetary space are smaller than the light corpuscles in question. These dust particles are, moreover, charged with life germs. When light corpuscles from the Sun hit those dust particles that are smaller than themselves, they push them along through space, and by chance may transport them to earth and other planets.

This force of light, known as light pressure, is powerful enough to detach a living organism from Earth's atmosphere, or that of some other planet, push it out into space, and finally transplant it upon the soil of another world. Twenty days would be required for organisms to traverse the distance separating us from Venus or Mars.

### What Arrhenius Believes

Professor Arrhenius considers that while many of the seeds and spores, during their celestial journey, will be killed, occasionally they will retain their vitality and settle upon fertile ground, creating life in worlds that have cooled down sufficiently to form a suitable abode. From this we might infer that all life, from one end of the universe to the other, bears an intimate relationship, and that the higher beings evolved from it and perhaps residing—as some still believe possible—on Venus or Mars, may not, after all, be so greatly dissimilar from ourselves as most imaginary drawings of the "Martians" have pictured them.

If the Sun's light pressure is capable of transplanting tiny life germs from planet to planet, it might more easily transport the spores of bacteria, since they are still smaller. The planet Venus, our sister world, is, Professor Arrhenius thinks, probably a suitable abode for the lower

(Continued on page 99)

# GOODELL-PRATT

## 1500 GOOD TOOLS

"Accuracy is my family name,"  
says Mr. Punch

You've got to buy measuring instruments and precision tools—micrometers, gauges, calipers and steel rules—largely on *faith*. The reputation of the maker is your best guarantee of *accuracy*.

The confidence and faith that mechanics, artisans, and other workmen have in the Goodell-Pratt 1500 Good Tools is *never misplaced*. Before you buy another steel rule, measure it up with a micrometer.

**Exceptional accuracy—the result of taking pains**

If you could see the infinite pains taken in the making of all Goodell-Pratt 1500 Good Tools—you would realize why so many thousands of workmen have such *faith* and *confidence* in the Goodell-Pratt Tools they use.

Your hardware dealer has Goodell-Pratt Tools or can get them for you. Talk to him. Meantime, write for a copy of our new machinist tool catalog picturing and describing the very tools you have always wanted to call your own. It's free.

GOODELL-PRATT COMPANY


*Toolsmiths*

Greenfield, Mass.



Calipers, Steel Rules and Surface Gauges in all the standard styles and sizes.

Surface Gauge  
No. 55  
with Micrometer  
Adjustment  
Price, \$12.00

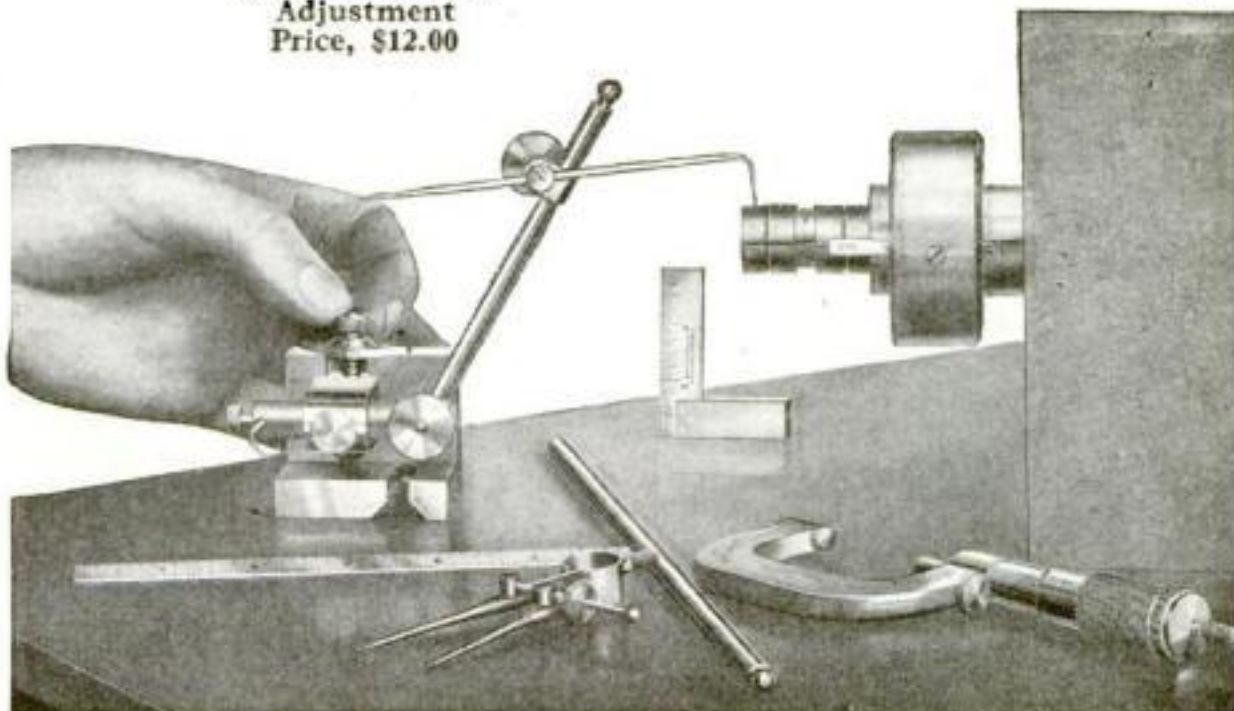



## They Wouldn't Be The Same

Given the same tools and material, two different workmen would make two kinds of a house. The house of one would be well finished—its interior, decorations and grounds a pleasant sight to behold—the small details given attention—a house well made, finished and complete.

The other would build, but not so cleverly—you know the difference in two people. You would see the amateurishness in his work. His house would not serve as well or last as long as the house of the first builder.

So it is with Machinists' Tools. There is a difference in the way they are made, in the hardening and finishing of the steel, a superiority in design, a higher accuracy, cleaner graduations, here and there a slight advantage, which, all combined, make a superior Machinists' Tool.

## BROWN & SHARPE MACHINISTS' TOOLS

represent the first builder's product. They were the first precision tools in America. Their superiority is shown by their fine finish, clean cut graduations, correct design, their world known accuracy and long life. Send for copy of our No. 28 Catalog, listing 2000 different tools.

**BROWN & SHARPE MFG. CO.**

Providence, R. I., U. S. A.

## MONARCH JUNIOR LATHES

"The Biggest Little Lathe Built"

Accuracy and precision—that's what you expect in lathe work and the only way to have the work done just as you want it is to do it yourself.

The MONARCH Junior Lathe is made especially for small shop or home work-rooms. Inventors, experimenters, mechanics and auto repairmen find it to be just the tool they want, for it turns out any small work that other lathes will and does it to 1/1000 of an inch accuracy.


The MONARCH Junior Lathe is small, compact, completely equipped and trouble-proof. Anyone can soon learn to operate it. Beginners can't jam it and expert mechanics prefer it.

Write today for our Free Catalog telling all about the MONARCH Junior Lathe as well as the complete line of MONARCH Lathes which are built up to 30 inches swing.

Monarch Junior Lathe 9 inch Swing — 2½ ft. Bed	<b>PRICE</b> <b>\$225</b>	Semi-Quick Change Gear and Bench Legs
--	------------------------------	---

The Monarch Machine Tool Co.  
401 Oak Street, Sidney, Ohio

This lathe is also made in a larger size, with  
11 inches swing, at slightly higher price.  
Full details on request.

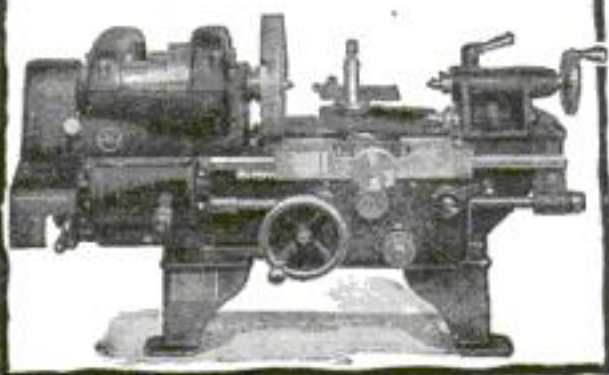

### SEND FOR THE INTERNATIONAL CATALOG



Our net price list of  
auto bodies  
and body  
supplies at  
Wholesale  
Prices. Save  
big money  
by buying  
Direct from Factory.

FOR FORD, CHEVROLET, AND DODGE  
Prices from \$27.85 up

INTERNATIONAL BODY WORKS, 514 W. Ohio St., Dept. 8, Chicago, Ill.

## \$2 Brings This Genuine DIAMOND PLATINUM RING



SEND ONLY \$2.00 and  
this hand carved and  
pierced ring of Solid  
Platinum set with  
a brilliant blue  
white perfect-  
cut first qual-  
ity Diamond  
comes to you  
charges paid.

**No  
Red Tape  
No Delay**

**10 Days'  
Free Trial**

Keep the ring  
10 days. If not  
satisfactory or  
if you can dupli-  
cate this value any-  
where for less than  
\$90.00 your deposit will  
be returned to you. After trial pay balance  
\$6.30 a month for 10 months. Price \$65.00.

**FREE**—Write today for Royal catalog of  
Diamonds, Watches and Jewelry.  
Thousands of gift suggestions shown in our  
\$2,000,000 stock. 10 months to pay on  
everything. Address Dept. 629.

**ROYAL DIAMOND  
& WATCH CO.**  
35-37-39 Maiden Lane New York

## Plant Hunters Risk Lives

(Continued from page 29)

lint valued at over \$6,000,000 by Arizona and California growers.

These are but a few of the many foreign crops and fruits that have been established in this country through the crop introduction activities of the Department of Agriculture. Prominent among other plant immigrants are: Chinese jujubes, persimmons, edible bamboos, chayotes, Japanese udo, Egyptian and Algerian date palms, Indian mangos, yang mae trees, South and Central American avocados, Chilean strawberries, Colombian blackberries, wild peaches and almonds, wild alfalfas, dwarf almonds, cherries and apricots, fruited currants, Chinese pears, Chinese petsai, dasheens, tung-oil trees and pistachio trees.

## In His Country's Service

The early service rendered by the Office of Foreign Plant and Seed Introduction of the United States Department of Agriculture owes much of its success to the enthusiasm of Mr. Barbour Lathrop, of San Francisco. In addition to his individual work in discovering and introducing many foreign plants, nuts, and fruits into this country, Mr. Lathrop, in company with David Fairchild, now chief of the office, traveled at Mr. Lathrop's expense for three years through many countries, collecting new plants and laying the groundwork for future broad and constructive effort.

One of the first of the exploring scientists, Frank N. Meyer, finally lost his life in the service, after passing through experiences that would match the tales of a soldier of fortune. In the nine years spent in China, Siberia, Turkestan and Korea, he walked over 10,000 miles in search of agricultural gems. Alone and miles from help he fought off Chinese ruffians who sought to hinder his work. For from six to eight months he traveled through the wilderness without seeing another white man. During this time he gathered and transmitted to Washington thousands of plants that have enriched the fortunes of many farmers.

His invaluable work was suddenly terminated by his accidental drowning while en route home, but the memory of his achievements is kept fresh in the minds of other workers in the service by the "Frank N. Meyer Medal" awarded annually by the American Genetic Association for the most outstanding achievement in plant introduction work.

## Some African Products

Dr. H. L. Shantz, another of the leading agricultural explorers, has invaded the innermost jungles of darkest Africa, on a 9000-mile trip, in many respects the most remarkable ever made by one of Uncle Sam's plant hunters. Personally, he has sent in 1600 specimens of various kinds of African fruits, nuts, sorghums, and other unusual horticultural products.

In Cape Colony Doctor Shantz obtained cuttings of the speckboom, a forage crop that gives evidences of adaptation to culture under Californian conditions; and he collected also many samples of forage and desert plants that thrive under African arid land conditions, and that may be of importance in vegetating our Western ranges. In East Africa he discovered and secured specimens of the famous telfaeria nut tree, which bears large gourds two or three feet long, containing a number of deliciously

(Continued on page 99)



## Plant Hunters Risk Lives

(Continued from page 98)

flavored seeds similar to the butternut in quality.

Still another globe-circling tour of the type that our agricultural explorers frequently make was a recent expedition of Dr. J. F. Rock to Burma, to obtain the seed of the real chaulmugra tree. From this tree comes chaulmugra oil, from which is derived the only cure so far found for leprosy.

After many false quests in different parts of Burma, where he found numerous so-called chaulmugra trees, but few that were bearing the essential fruit and seed, Doctor Rock was finally successful in gathering enough of these remarkable seeds to establish plantations in Hawaii.

While these scientists were searching for their objects in Africa and Burma, Mr. Wilson Popenoe was currying the paths and byways of Guatemala, Costa Rica, Colombia, Ecuador, Peru and Chile, for other plant treasures. During a journey of 6000 miles he secured 23 new varieties of avocados, or alligator pears, also the peji-baye, an American cousin of the Egyptian date palm; the Colombian giant blackberry—the world's largest edible berry, growing to a length of 2½ inches—a "white blackberry," several different kinds of South American peaches and apples, a remarkable dwarf orange, and a new type of wild potato.

## Germ from Other Worlds

(Continued from page 97)

species of living organisms. Its vapor laden atmosphere and sultry climate might conceivably harbor micro-organisms producing a variety of tropical fevers and perhaps, according to a spectacular extension of the theory, to them might even be traced some of the plagues that mysteriously appear on earth.

As illustrated on page 41, when Venus passes between us and the sun, there is afforded an opportunity for such organisms, if they exist, to be transported to Earth. The solar rays, by traversing Venus's atmosphere, hit the dust particles, which may be charged with bacteria, as well as animal and plant seeds, and convey them to the earth in about 20 days. Conversely, germ laden dust is being continually transplanted from our atmosphere to other worlds. And so this interchange of matter may be eternally spreading the same species of life throughout the heavens.

## Christmas Gifts You Can Make Yourself

**METHODS** of making unusual Christmas gifts will be featured in the Home Workshop next month. There will be articles on making toys—an electric train, a kiddie broncho, a doll's house, a toy automobile, a "sledan," and other fascinating novelties prepared especially for POPULAR SCIENCE MONTHLY by some of the best toy designers in the country.

Other stories will tell how to decorate the Christmas tree, how to make a doll radio receiving set; how to prepare marbled paper, and how to build substantial articles, such as an automatic cigarette box and a combination book rack and table lamp, all suitable for presents.

Drawings also will be published, illustrating a simple method of constructing a stage for Yuletide entertainments.



Dividend checks from the American Telephone and Telegraph Company are received quarterly by more than 200,000 telephone users.

## Owned by those it serves

Less than fifty years ago an application was made for a patent which created the possibility of speech between distant points. It was the culmination of years of study, research and experiment. It suggested a new aid in commerce and domestic life; a new tie to bind the people together. But it was only a suggestion—a dream.

To make that dream come true required the creation of an organization unlike any other. It demanded a kind of scientific knowledge that was yet to be formulated, as well as a type of equipment still to be devised. And it necessitated the financial and moral support of many communities.

Out of this situation grew the Bell System, bringing not only a new public service, but a new democracy of public service ownership—a democracy that now has more than 200,000 stockholders—a partnership of the rank and file who use telephone service and the rank and file employed in that service. The American Telephone and Telegraph Company exists to serve the people and is

owned directly by the people—controlled not by one, but controlled by all.

Evolution is going on. Each year the ownership is more widespread. Each year the various processes of the service are performed more efficiently and economically. Each year new lines and extensions are constructed. The responsibility of the management is to provide the best possible telephone service at the lowest possible cost and to provide new facilities with the growth of demand. To do these things requires equipment, men and money.

The rates must furnish a net return sufficient to induce you to become a stockholder, or to retain your stock if you already are one; after paying wages sufficient to attract and retain capable men and women in the service. They must adequately support and extend the structure of communication.

These are considerations for the interest of all—public, stockholders, employees.



"BELL SYSTEM"  
AMERICAN TELEPHONE AND TELEGRAPH COMPANY  
AND ASSOCIATED COMPANIES

One Policy, One System, Universal Service, and all directed toward Better Service

### MAKE BIG PROFITS CHARGING BATTERIES \$20 Brings You an HB Charger

Balance on long, easy terms, more than paid for by your big monthly profits. No expense for repairs or renewals. Sizes for 5, 10, 16 or 32 batteries. Write us about HB Air Compressors, Motors, Generators, etc. All big money-makers for you. 6 hour charging with new HB Constant Potential outfit increases your profits. Write for information.

HOBART BROTHERS  
COMPANY  
Box P 11 Troy, Ohio



The Midget  
"Five-in-One" Slide Rule  
is a combination Mannheim, Polymetric, Log-Log, Binary, Add and Subtract Slide Rule. It will instantly add, subtract, multiply and divide any combination of whole numbers, fractions, mixed numbers and decimals. Gives every root and power, also Loga, Sines and Tangents. Made of aluminum with scales on white celluloid. Size 4 in. Approved and adopted by colleges. Price with instructions, \$1.50. Leatherette Case 50c. extra. Catalogue Free.  
Gibson Slide Rule Co., Niles, Mich.



How to  
Run a Lathe  
An 80-page book  
for 10c. Postpaid.  
Coin or Stamp.

## SOUTH BEND LATHES

Standard Change Gear		Quick Change Gear	
9"x 3' Lathe	\$ 176.00	9"x 3' Lathe	\$ 216.00
11"x 4' Lathe	228.00	11"x 4' Lathe	276.00
13"x 5' Lathe	304.00	13"x 5' Lathe	354.00
15"x 6' Lathe	376.00	15"x 6' Lathe	431.00
16"x 8' Lathe	452.00	16"x 8' Lathe	512.00
18"x10' Lathe	656.00	18"x10' Lathe	721.00
21"x12' Lathe	933.00	21"x12' Lathe	1,016.00
24"x14' Lathe	1,254.00	24"x14' Lathe	1,353.00

Send for Free Catalog No. 77

SOUTH BEND LATHE WORKS, 433 E. Madison St., SOUTH BEND, IND.



## THE HOME WORKSHOP

## Your Home Heating Plant

(Continued from page 78)

trated, to lead the stream of air into an ordinary stove pipe. This stove pipe projects into the air inlet and points in the direction of the furnace. The end of the pipe should be nozzle-like in shape. To make this, simply split the pipe down at the end in several places and bring the segments together so that they overlap to form a cone; then rivet them together.



To get the maximum benefit of this recirculation system, cover the back of the fan also with a sheet metal casing and run a stove pipe from it either into the new inlet or right up to the first floor, so that all the air blown into the furnace will be from the living-rooms. This arrangement produces surprising results and sometimes saves as much as 22 cents on a dollar's worth of coal, according to heating engineers.

Another method of accomplishing the same result is to place a fan in a tin-lined box with ducts leading to and from the cold air pipe, as illustrated in the left-hand column on page 78.

The fan or blower does not need to be a powerful one; the average household fan will serve the purpose, but a regular ventilating fan or blower has the advantage of being a little sturdier in construction. A motor as small as 1/20 h.p. will serve and when fully loaded consume only 38 watts or about three-fourths of the current consumed by an ordinary electric lamp. Therefore, the cost of operation is small.

The fact that so small a blower unit is required often makes it possible to place it directly in the air duct. When this can be done, it is necessary merely to have a door in the top of the pipe. In every case, however, it is necessary to provide an indoor air inlet if one was not built when the furnace was installed.

A register of the usual type can be purchased, or one can be made with cast

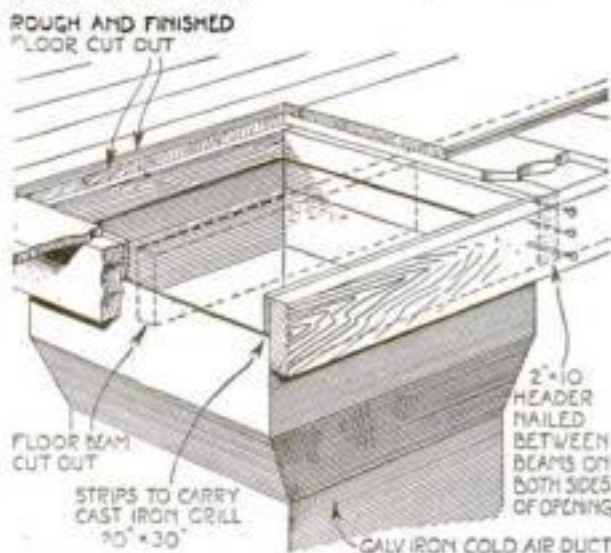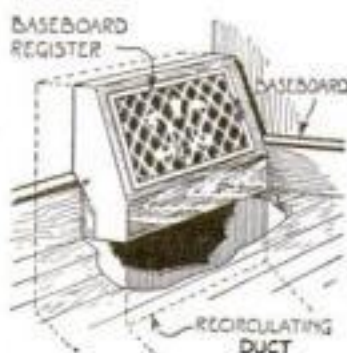

Method of installing floor and baseboard registers for recirculating air duct

iron or steel grillwork, which can be obtained in all kinds of ornamental designs. By making use of this grillwork, it is sometimes possible to put a register in an odd shaped or awkward corner where a commercial size of hot air register would not fit.

The radiator, to give the best results from recirculation, should be 18 by 24 in. for a 4-pipe furnace, 20 by 26 for a 6-pipe

(Continued on page 101)

"Red Devil" Rapid Boring Auger Bits are 33 1/3% easier boring, have 10% greater clearance and bore with or against the grain of any wood. Style 2400—10/16 in. shown here 75c

# Red Devil

Reg. U. S. Pat. Off.

## Lock Washers Do Stop Vibration!



**L**OOSENING, rattling, wear and tear put to an end instantly and permanently.

Bolts and nuts on automobiles, trucks, tractors, stationary and marine engines, farm machinery, etc., hold and stay tight!

"Red Devil" Lock Washers are corrugated—have six points of contact where others have only two—three times the gripping power of others. It requires 1 1/4 turns to loosen them while others will loosen with a 3/4 turn. That means 66 2/3 per cent. greater efficiency. Easy to apply.

In assorted sizes in handy bags, retailing as follows: 30 in a bag, 15c; 40 in a bag, 20c; 90 in a bag, 25c. At all good hardware stores. If dealer is out of stock, send name of dealer and order direct.

"Red Devil" Mechanics' Tool Booklet Free.

"Red Devil" Tools—American made

**SMITH & HEMENWAY CO., Inc.**

Manufacturers of "Red Devil" Tools  
264 Broadway New York, N. Y.

"Red Devil" Glass Cutters—the glaziers' standard tools of the world. "It's all in the wheel." Made in 40 styles. No. 024 shown below, 20c.



## A Clean, Sharp Cut—Everytime!

—they can't wear out!

Neverslip cutting blades are made from special high carbon crucible steel. That's why they'll outcut and outlast any plier made. Crucible makes a strong tough edge that resists wear and remains sharp for a long time. But if you accidentally nick the edge you don't have to throw the plier away.

For Neverslip Pliers are made with renewable cutting blades—you merely remove the old blades, insert new ones and you have a brand new pair of pliers ready for use at small cost.

Neverslip Pliers will cut soft wire or insulation clean and even—no rough or ragged edges. They're guaranteed to outcut and outlast any plier made.

## NEVERSLIP side cutting pliers

Just go into any hardware store and ask to see a pair of Neverslip Pliers. Look them over carefully. Note the sharp cutting blades. If you want to get real action and long life from a pair of pliers buy Neverslips. Most hardware dealers sell them. Write for leaflet.

**THE NEVERSLIP WORKS**

New Brunswick New Jersey

Neverslip Pliers are furnished in six seven and eight inch sizes






## THE HOME WORKSHOP

## Your Home Heating Plant

(Continued from page 100)

furnace, 21 by 29 in. for an 8-pipe furnace, and 24 by 32 for an 11-pipe furnace. These areas are larger than the sizes of cold air ducts for furnaces of corresponding size.

The location of the register will be determined somewhat by the floor beams, which are placed 16 in. from center to center. Not more than one of these beams should be cut, and then headers should be placed across the opening to hold the ends of the cut beam and to prevent any possibility of the floor's sagging. Because of the danger of striking a nail, an old saw should be used

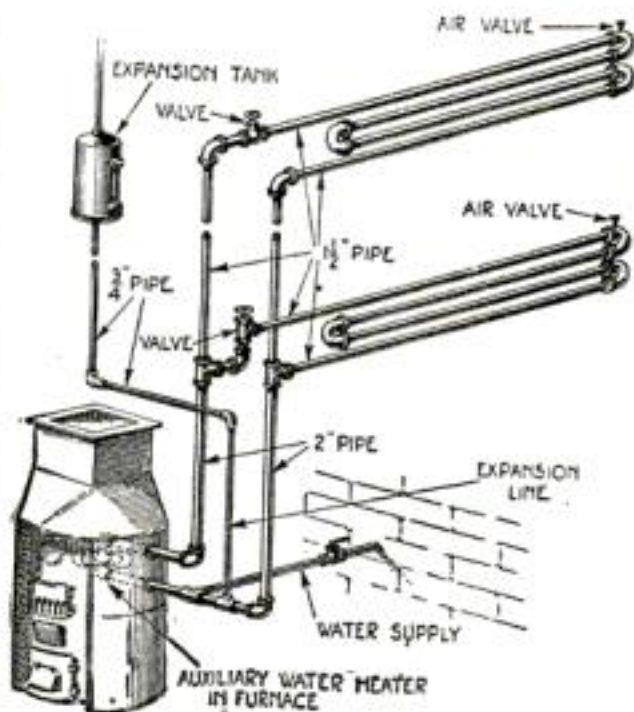

Auxiliary heating for shut-off rooms may be provided from water heater in furnace

for cutting the opening in the floor. A baseboard register may be used if more convenient.

If the home worker does not care to undertake the sheet metal work himself, he can make a drawing showing the exact dimensions of the pipe and fittings needed and have them made up very reasonably at a tinsmith's shop.

Sometimes the installation can be simplified by using one or two of the existing hot air stacks as intake flues. The pipes going to the hall register and to the register or registers in one or two of the little used rooms of the house can be disconnected from the furnace and connected with the cold air duct. This requires little work and usually very little, if any, additional piping, but it is open to the objection that the area of the combined flues usually is not as large as if a single new inlet is provided. Unless ample provision is made for supplying air to the furnace, it will not give the best results.

In an emergency, a fan often can be used to aid the circulation of air by placing it with its back against a register so as to suck warm air out into the room.

## Heating the Bathroom

When pipeless furnaces are used and it is desired to provide heat for the bathroom, nursery or other room that is shut off from the rest of the house for considerable periods, one of the most efficient methods is to install a hot water heating attachment inside the furnace and connect it with a hot water radiator or pipe coils, as illustrated above. Another method is to use a flue,

(Continued on page 102)



If you have a radio receiving set using a storage battery, haven't you often wished for a simple efficient means for recharging this battery without lugging it away to a service station?

## Tungar

BATTERY CHARGER

charges storage batteries from any alternating current lighting circuit with a minimum of expense and trouble. You can do your charging right in your own home and without lifting the battery from its present position.

The Tungar is not new—thousands have been used for charging automobile starting and lighting batteries for years. Tungar has no moving parts to wear out or require oil. It requires no attention while charging but may safely be left on the battery all night.

If your dealer in radio or other electrical supplies does not carry Tungar, write us and we will send you literature and tell you where you can get one.

## General Electric Company

General Office  
Schenectady, N.Y.

Sales Offices in  
all large cities. 35A 80C



**WHERE ARE MY TOOLS?**

Left around somewhere? Lost? Damaged? Stolen? Not if you keep them in a Union Tool Chest. It often saves its cost the first month by keeping your tools safe and in order. Write for booklet describing more than fifty styles and sizes.

**UNION TOOL CHEST CO.,**  
24 Mill St., Rochester, N. Y.

### Standard Underwoods

5-Year Guarantee

**\$3.00**  
DOWN

Yes, this genuine Standard Visible Writing Underwood newly rebuilt, at much less than factory price, yours for \$3.00 down and then easy monthly payments.



**10 Days' FREE Trial**  
Try it for 10 days at our risk. Money back guarantee. Send now for free book. Big bargain offer.

**TYPEWRITER EMPORIUM**  
SHIPMAN-WARD MFG. CO. 2148 Shipman Building  
Chicago, Illinois

**MAKE YOUR FORD INTO THIS SPORT CAR ONLY \$6.40**

Other types down to \$3.50. Famous sure fit, *Realist* life-size patterns and picture instructions show how. You can easily convert your Ford into this fast, snappy Sport Car as hundreds have done with a few dollars worth of material from the hardware store. No need to lay up the car. The "FAL" with conical disc wheel patterns, pressed Metal Streamline Rear only \$6.40 delivered. Built low, rides wonderfully easy. Order NOW while we can make good delivery. Send 5c coin for illustrated prospectus of Sport Bodies, "Jolly" Tops and "Gasm" Windshields.

**KUEMPEL CO.,** 511 Kuempel Bldg., Guttenberg, Iowa

**\$4800 to \$12000 yearly income for you**

—if you become a trained paint salesman. Our course equips you with the necessary knowledge. It is endorsed by leading paint companies. They want to secure men who have completed it. Write for complete details of the course and our assurance of placing you with reliable company after you have graduated.

**CLEVELAND PAINT SALESMEN'S TRAINING SCHOOL**  
623 Bangor Building Cleveland, Ohio



## Sits There Watching a Lifetime of Work


If some mathematical wizard perched himself on your machine, totalled the output at lightning speed and told infallibly how the work was going, what would his services be worth to you?

Would he be worth the price of a Veeder Counter?—you can have him for that price. He's a Veeder Counter personified.

You're paying someone to count the product anyway, at some stage of operations. From now on, count it automatically instead. Increase the *VOLUME* automatically, by counting it in front of the machine operator—with a

## Veeder COUNTER

The Revolution Set Back Counter below records the output of any machine where a shaft-revolution indicates an operation.

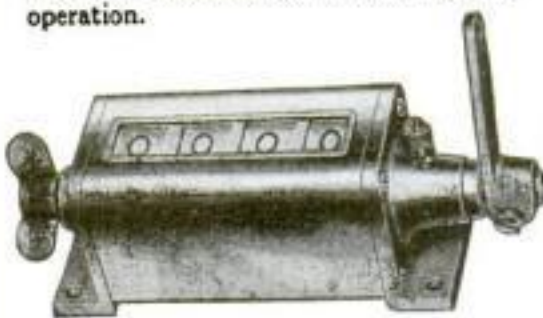

Sets back to zero from any figure by turning knob once round. Supplied with from four to ten figure-wheels, as required. Price with four figure-wheels, as illustrated, \$10.00—subject to discount. *Cut less than one-half size.* Set-Back Rotary Ratchet Counter, to record reciprocating movements as on punch presses, \$11.50 (list).

## Speed Counter

Here's the handiest instrument for finding revolutions-per-minute of a shaft or flywheel. You hold the tip of the counter against end of revolving shaft; press lightly when the second hand of your watch comes to 0; release pressure when minute is up. A spring clutch controls the recording mechanism.



(Cut less than 1/2 size.)

The Veeder Speed Counter enables you to keep motors, engines, generators, line shafting and machines operating at efficient speeds. Price, with two rubber tips (as illustrated) \$3.50.

Send for free booklet no matter what you want to count—automatically or by hand.

**The Veeder Mfg. Co.,**  
44 Sargeant St., Hartford, Conn.

## THE HOME WORKSHOP

### Your Home Heating Plant

(Continued from page 101)



which can be made of a large stovepipe, connecting with the regular hot air chamber or an auxiliary hot air chamber made by incasing part of the smokepipe with a larger pipe.

Such a flue, however, usually will not operate unless a fan is placed in front of it, and, therefore, it is generally easier to provide a separate gas, gas-steam, or electric heater for such a room.

### Making a Self-Filling Humidifier

When the circulation of air is as good as can be made, it is not difficult to provide for a proper degree of moisture. Most furnaces have a water pan, but usually these are placed in such a way as not to provide a sufficient surface of water for evaporation. The best plan is to keep a panful of water on top of the furnace. It should have as large an area as possible.

The simplest way to obtain one the right size is to make it from a sheet of galvanized iron either by cutting the corners, turning them up, riveting and soldering them, or by bending up the edges and turning the corners in, as illustrated. With the latter method, a single rivet in each corner will hold the pan and no soldering is necessary.

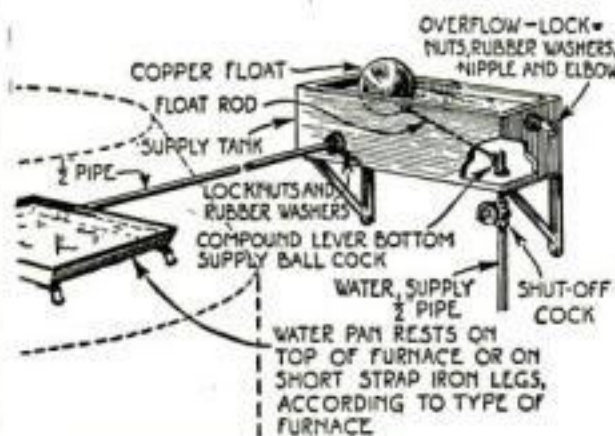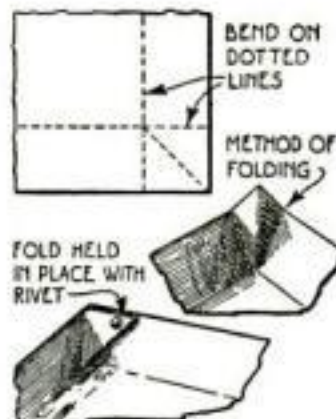

Typical arrangement of water pan on top of furnace supplied from tank, and suggestion for making pan without soldering

To avoid having constantly to fill the pan, it is well to provide a tank outside and both tank and pan can then be controlled by using a regular float valve. Any one who has had the most elementary experience in pipe fitting will have no difficulty in making the arrangement illustrated. The only point of importance is to provide an overflow in the tank so that in case the valve fails to work for any reason, the water will not flood down on the furnace itself.

To provide the proper degree of humidity in a steam-heated room is even simpler. It is merely necessary to change the air outlet valves on the radiators for some type of commercial valve that is designed to permit a certain amount of steam to escape and mix with the air of the room. The same result can be accomplished in a makeshift manner by taking off the valve cap and turning the adjusting screw a trifle so that

(Continued on page 103)



## Pay Nothing

An amazing new offer—wear this GENUINE DIAMOND for a week at our expense—absolutely no risk to you—deposit nothing—READ EVERY WORD OF THIS OFFER:

Send No Money

Pay No C.O.D.

## Mail Free Trial Coupon!

Just send the coupon below—do not enclose a penny—and we will send you on approval at our expense your choice of these diamond rings. The ring illustrated above is the most beautiful hand engraved solid gold ladies' ring you ever saw, set with a fine, large, genuine blue-white diamond. Pay nothing when it arrives. Merely accept the ring and wear it for a week, at our expense. After a week decide. If you return the ring, that ends the matter. You have risked nothing. But if you keep the ring, send us only \$3.75 a month until you have paid the amazingly low price of \$38.75 for this regular \$50 value. The ring is an elaborate pierced model in solid 14K green gold with hand engraved white gold top. A striking new model. The diamond is a beauty—extra brilliant, blue white, perfectly cut—a remarkably big value. Men's extra massive



14K solid gold fluted ring with 18K hand cut white gold top set with extra fine perfectly cut blue-white genuine diamond. Extra Big Value. Now \$38.75—\$3.75 a month. Send no money. Pay no C.O.D. A week's trial absolutely FREE. Mail coupon now.

Just mail the coupon below (and enclose finger size). SEND NO MONEY—pay nothing on arrival.

**Harold Lachman Co.,** 204 S. Peoria Street, Dept. 1788 Chicago

Send me absolutely free and prepaid, for a week's trial, the genuine diamond ring checked below. I am to pay nothing when it arrives. After one week I will either return the ring by registered mail and that ends the matter, or I will send you \$3.75 each month until \$38.75 has been paid. Title remains with you until fully paid. I ENCLOSE MY FINGER SIZE.

☐ Ladies' Ring No. A4350

☐ Men's Ring No. A4450

Name.....

Address.....

Age..... Occupation.....

Copyright 1928, Harold Lachman Co.



## Buy Direct from Headquarters

Save from 25% to 40% on standard makes of new and rebuilt motors. Get the proper size and type of motor to suit your exact needs—and get it fully guaranteed by a motor merchandising house backed with 20 years of dependable service direct to users. Write today for catalog No. 90. It quotes prices on motors of every size and type.

Electrical Equipment Bought, Repaired or Exchanged

**THE FUERST-FRIEDMAN COMPANY**

"Reliability Built In"

CLEVELAND,

OHIO





## THE HOME WORKSHOP

## Your Home Heating Plant

(Continued from page 102)

the valve leaks a little and permits the steam to escape.


With a hot water system it is difficult to provide sufficient moisture. The amount required is so large that even placing a pan or humidifier on each radiator usually does not help much.

## Automatic Heat Regulator Saves Steps

The usual practice of fixing a furnace in the morning and in the evening and allowing it to run with little or no attention throughout the day is not as economical, according to heating engineers, as to maintain an even temperature throughout the day. To do that, however, requires constant watchfulness and this can be accomplished in most households only with an automatic regulator. The one illustrated was designed by Paul H. Byer, of Hagerstown, Md., and not only saved many steps to the cellar, but apparently caused a slight reduction in the amount of coal used.

This device automatically opens and closes the check door of the furnace at any temperature desired and keeps the temperature amazingly constant if the adjustment screws of the thermostat are carefully set.

The power is supplied by one or more batteries which operate the plunger of the

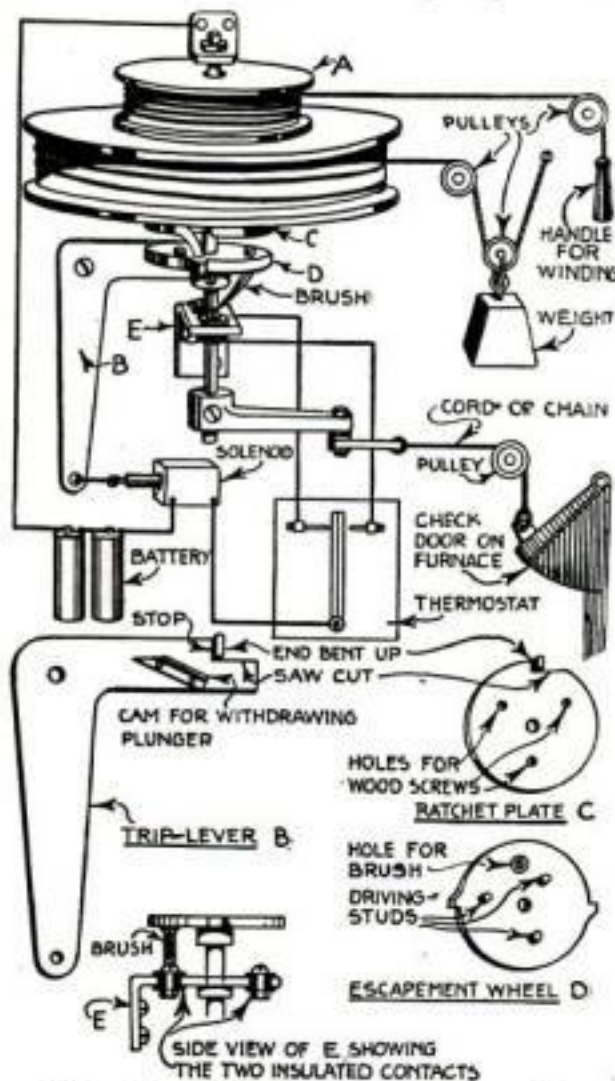

When the adjustment screws on the thermostat are properly set, this apparatus regulates the drafts to provide an even temperature

solenoid and a weight heavy enough to operate the damper. The pulley A is made of wood in one piece. The upper part is one half the diameter of the lower part so that the weight will move the same distance as the handle for raising it. The pulley may have a brass tube for a bearing, which should be a loose fit on the shaft.

The ratchet plate C, made as shown, is fastened to the pulley by wood screws. The central hole should be larger than the shaft. The escapement wheel B is provided with

(Continued on page 104)

## An Easy Way to Make A Thousand and One Things



If you like to "make things with your hands," here's something that will help you. When you want to saw a board, cut a groove, smooth a block, sand a joint, grind a tool, buff a piece of metal, or do any one of a thousand similar jobs, you can do them quicker, easier, better and cheaper with the help of this machine than you can by hand. Hundreds of owners are getting surprising results with

## Crane's Junior \$28.75 Bench Saw Without Motor or Base

A high grade product of remarkable capacity, unusually low in first cost and operating expense. Can be used for a multitude of jobs. Specially adapted for use in wood and soft metals.

Size No Indication of Capacity. Properly constructed to handle an unbelievable quantity of work with remarkable ease. Surprisingly simple, yet powerful in performance. Meets the needs of thousands of men who do light shop work yet who require precision and accuracy combined with convenience and economy of operation.

## Things You Can Do with Crane's Junior Bench Saw

**For Sawing.** Dozens of jobs must be done on a saw—cutting, ripping, mitering, grooving, rabbeting, and tenoning. Does all of these easily and economically on one machine with only a few special attachments. No need for several special machines. Cuts, rips, and miters stock up to 1 1/4 in. thick. Special saws for cutting type metal, brass, copper, aluminum, fiber, bakelite, etc. Can also cut steel tubing, rods, thin plates or sheets of iron, steel, mica, carbon, and similar materials with an elastic emery wheel. Special grooving saws for cutting tenons, and rabbets. Table easily elevated for doing this work. Standard saw slot takes 3-16 in. grooving saw. Wider grooves up to 1/2" can be cut with use of dado head. This work also requires table top with special removable insert for widening saw slot which is furnished for \$6.50 extra. Be sure to specify when ordering.

Also adapted for grinding, buffing, sanding, etc., merely by attaching necessary tools, such as emery wheels, sand discs, etc., to outer end of saw arbor.

**Tilting Top for Beveling.** This is an important feature. Top can be tilted five degrees to left and ten degrees to right, or locked securely in flat position. This feature particularly advantageous on pattern work to obtain draft without planing. Top also hinged for convenience in grooving and to give easy access to arbor, pulley, saw, and bearing. All guides in accurate alignment for precision work.

**What Users Say:** "It is a peach of a saw." "Am well satisfied." "Have ripped nearly 1,000 ft. of White Cedar in lengths from 16 ft. to 27 ft. It did as well as large rig could have done." "Is everything we could hope for." "Would just as soon have it as saw costing five to ten times the price." Many more like them. Not a single dissatisfied customer.

**Specifications.** All metal construction; height 7"; bronze bearings, with grease cup; table top 10"x13", planed, smooth and true; flanged pulley 1 1/4" diameter for 1 1/4" belt. (Grooved pulley if desired.) Speed 3500 rpm. Power required 1/2 or 1 1/3 h.p. Finish, dull black; weight 40 lbs.; shipping weight 50 lbs. Will cut 1 1/4" stock.

**Our Guarantee.** Send for a CRANE JUNIOR BENCH SAW and use it ten days. If at the end of ten days you are not satisfied, return machine at our expense and get your money. Purchase price will be gladly refunded.

Ask for prices and descriptive literature on other Boice Machines and Motors. Satisfaction guaranteed. Prices lowest consistent with a quality that gives service. Use the coupon.

W. &amp; J. BOICE, Toledo, Ohio

## FILL OUT AND MAIL THIS COUPON

W. &amp; J. BOICE,

Dept. P.S. 11, 112-23rd St., Toledo, Ohio

Enclosed is money order for \$28.75 for which please send me one Crane Junior Bench Saw with equipment specified, as per your special ten day trial offer.

If desired with 1-4 hp. A. C. Motor and base at \$60.00 check here.....

If 1-3 hp. motor at \$63.50, check here.....

Name.....

Street and No.....

Town.....

R.F.D..... County..... State.....

**TYPEWRITERS**  
We Save You 50 %  
**FREE TRIAL—EASY TERMS**  
Your choice of all STANDARD MAKES, UNDERWOOD, ROYAL, SILENT L. C. SMITH, Self-starting REMINGTON, etc. Rebuilt by the Famous "Young Process." Guaranteed good as new. Lowest cash prices. Time payments or rentals with special purchase privileges. Largest stock in U. S. Write for special prices and terms.  
YOUNG TYPEWRITER CO., Dept. 467, CHICAGO

## HAIR GROWS!



When our Vacuum Cap is used a few minutes daily. Sent on 60 days' FREE trial at our expense. Stops falling hair and dandruff. Science combined with common sense. No drugs or electricity. A postal brings illustrated booklet.

Modern Vacuum Cap Co.  
400 Barclay Denver, Colo.

## TRAPS-GUNS

Hunting Search Lights, Animal Baits, and all Trappers' Supplies at lowest prices. Write for Trappers' Guide, Catalog of Trappers' Supplies, Game Laws, Fur market information. All sent Free.

E. W. BIGGS & CO. 180 Biggs Building, Kansas City, Mo.



## Home Billiard &amp; Pool Tables

Magnificently made in all sizes, at all prices. Game exactly same as standard table. Become expert at home. Use in any room, on any house table, or on its own folding stand. Quickly leveled. Put up or down in a minute. Small amount down, small monthly payments. Ask your dealer or WRITE TODAY for Catalog.

E. T. BURROWES CO., 90 Free St., Portland, Maine



# Does this smoker know what he's talking about?

**He says the best pipe of the day is the first one**

A smoker from Zanesville, Ohio, who prefers to conceal his identity under the initials "A.K.K.," insists that the after-breakfast pipe is far and away the best pipe of the day.

"Of course," writes A.K.K., "it depends somewhat on the breakfast. I couldn't get much joy out of a pipe after getting up from burnt oatmeal, bad coffee, and soggy toast. But after one of the breakfasts my wife can turn out, that's different!"

"Then when I step out on the porch and light up the old pipe, I very nearly approach the pinnacle of my day. As I figure it, one puff after breakfast is worth a dozen puffs after dinner."

"But please don't let this preference of mine for an early-morning pipe in any way injure my standing as an inveterate pipe smoker. I smoke from breakfast until bedtime and get a lot of pleasure out of each pipe, provided always that I use the right kind of tobacco."

At this point it seems only fair to admit that A. K. K. is an Edgeworth smoker.



Thousands and thousands of smokers all over the country have discovered that Edgeworth is just the "right kind of tobacco" to suit their tastes.

Edgeworth may or may not be the right kind of tobacco for you. At least we want to give you the opportunity of finding out just what you do think about it.

Just jot your name and address down on a postal and we will send you immediately free samples, both of Edgeworth Plug Slice and Ready-Rubbed. If you will also include the name and address of the dealer from whom you usually purchase your tobacco supplies, we will appreciate the favor.

Edgeworth is sold in various sizes to suit the needs and means of all purchasers. Both Edgeworth Plug Slice and Edgeworth Ready-Rubbed are packed in small, pocket-size packages, in handsome tin humidors, and also in various handy in-between sizes.

For the free samples address Larus & Brother Company, 59 South 21st Street, Richmond, Va.

To Retail Tobacco Merchants: If your jobber cannot supply you with Edgeworth, Larus & Brother Company will gladly send you prepaid by parcel post a one- or two-dozen carton of any size of Edgeworth Plug Slice or Ready-Rubbed for the same price you would pay the jobber.

## THE HOME WORKSHOP

### Your Home Heating Plant

(Continued from page 103)

three or more studs, a hole for the brush screw, and two teeth or studs in its circumference 180 degrees apart. This piece is held securely to the shaft by a setscrew.

The trip lever *B* is provided with a cam made by bending a small piece of steel at an angle and riveting it in the position shown. A stop is made by sawing back a short distance from the end of the lever and bending the strip out. The thermostat is made by riveting together pieces of copper and zinc and fastening them at the end so that they can swing back and forth between the adjustable contacts. The unequal expansion and contraction of the two metals cause the arm to bend one way or the other in proportion to the temperature changes.


The thermostat makes contact for hot or cold, as the case may be, by bending to touch one or the other contact screws. When the contact is made, the plunger of the solenoid is drawn in. This moves the trip lever *B*, and releases the escapement wheel so that one tooth passes by. This tooth comes in contact with the cam and while passing over the cam causes the plunger to be withdrawn. The other tooth in the escapement wheel then comes in contact with the stop.

During this operation the shaft and crank on the end have moved through 180 degrees and the brush makes contact with the other terminal of the thermostat, so that the device is set for the time when the thermostat bends the other way and makes contact with the opposite screw.

To install a commercial type heat regulator it is usually necessary merely to mount the thermostat on an inside partition. The cable carrying the electrical connection is passed through a hole back of the thermostat and dropped down between the studs to the cellar. The only difficulty is to fish the cable through the floor. The regulating motor, whether spring or electric, is placed on brackets near the furnace in a position convenient for running chains to the draft and dampers.

### Alarm Clock Opens Drafts

An alarm-clock regulator is easily installed even when a thermostatic regulator is not used. It costs little and serves for closing the dampers and opening the draft.

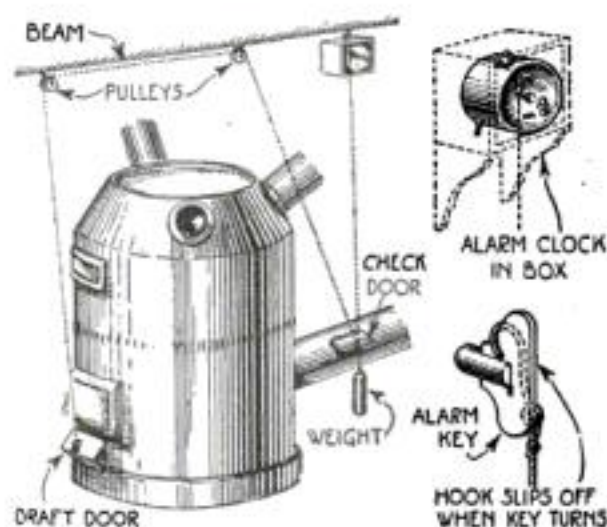

The device adapted for a standard hot air pipe furnace

This saves making a trip down into the cold cellar the first thing in the morning. The principle of operation is simply that

(Continued on page 105)




### Choke off that "squawk"

**A**FTER all it is not always the bad vaudeville actors that "get the hook." Many owners have found an efficient hook to choke off the "squawk" of their radio sets and secure enjoyable music by adding Acme Audio Frequency Amplifying Transformers to the ordinary detector unit. Acme Transformers cost but five dollars, yet the results are almost marvelous. Not only do they amplify sound, but they bring it naturally—realistically. They are necessary to the proper operation of the Acme Clear Speaker which enables a whole roomful of people to enjoy the broadcasting concerts.

In order to get more than one broadcasting station and thereby pick out the concert you like best, you should also add an Acme Radio Frequency Transformer. This greatly increases the range of your set whether it be vacuum tube or crystal detector type. This wonderful little transformer sells for the same price as its twin brother the Acme Audio Frequency Amplifying Transformer. Your set is not complete without both these transformers and the Acme Clear Speaker.

The Acme Apparatus Company (pioneer transformer and radio engineers and manufacturers) also make detector units, the AcmePhone, Acme C. W. and Spark Transmitters, etc. Write for interesting Transformer booklet if your own radio or electrical dealer cannot supply you. The Acme Apparatus Company, Cambridge, Mass., U. S. A., New York Sales Office, 1270 Broadway.

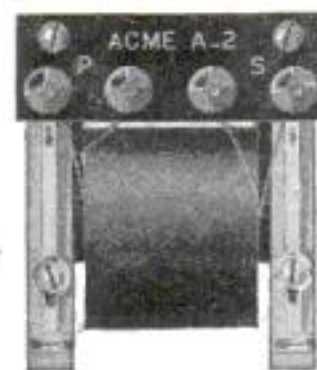

Type A-2 Acme Amplifying Transformer  
Price \$5 (East of Rocky Mts.)

# ACME

for amplification





## THE HOME WORKSHOP

## Your Home Heating Plant

(Continued from page 104)

when the alarm clock rings, it unhook a weight that operates the drafts and dampers. The various arrangements of chains for hot air, steam, hot water or pipeless furnaces are made clear in the accompanying illustration. A few yards of chain, an ordinary alarm clock, a door spring, two pulleys, a sash weight or other lead weight

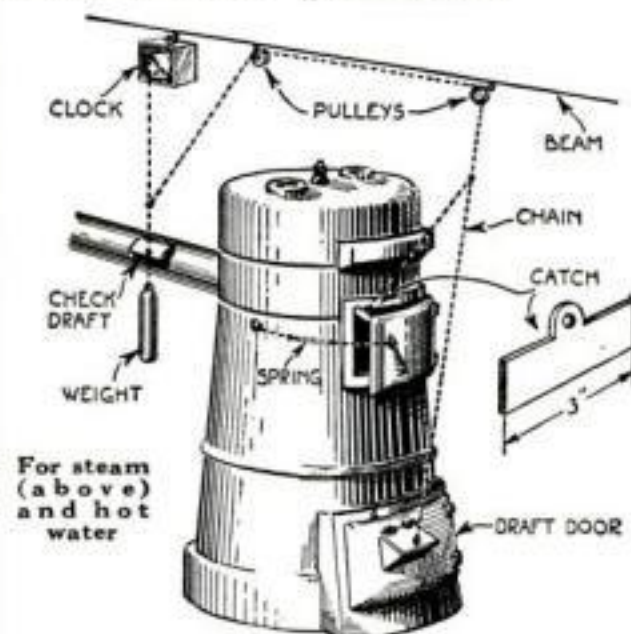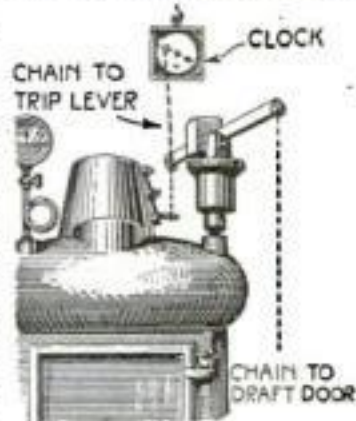



weighing from 6 to 8 lbs., will have to be purchased, and a small brass catch made for holding open the firebox door, in case it is the practice to open that door at night to check the fire.

The alarm clock should be inclosed in a box to protect it from the dust. The weight is attached to a length of chain and a hook in the other end is placed over the alarm winding key. When the alarm rings, this key turns and permits the key to slip off, thus dropping the weight. This operates the drafts and dampers directly, except in the case of the firebox door, in which case the catch, above referred to, is jerked out from between the open door and the door frame, and thus causes the spring to shut the door.

Obsolete as open fireplaces are, they nevertheless, in a time of coal shortage, offer a supplementary source of heat, because they will burn all sorts of odds and ends of wood that otherwise would be wasted. Even newspapers rolled into bundles and burned in the fireplace

throw out a surprising amount of heat. Many fireplaces, however, especially small ones in modern houses, are apt to smoke. This usually is due to poor design, the fireplace opening being too large in proportion to the smoke flue. It is difficult to do much without reconstructing the fireplace, but often the fireplace can be made to draw better simply by reducing the front

(Continued on page 106)

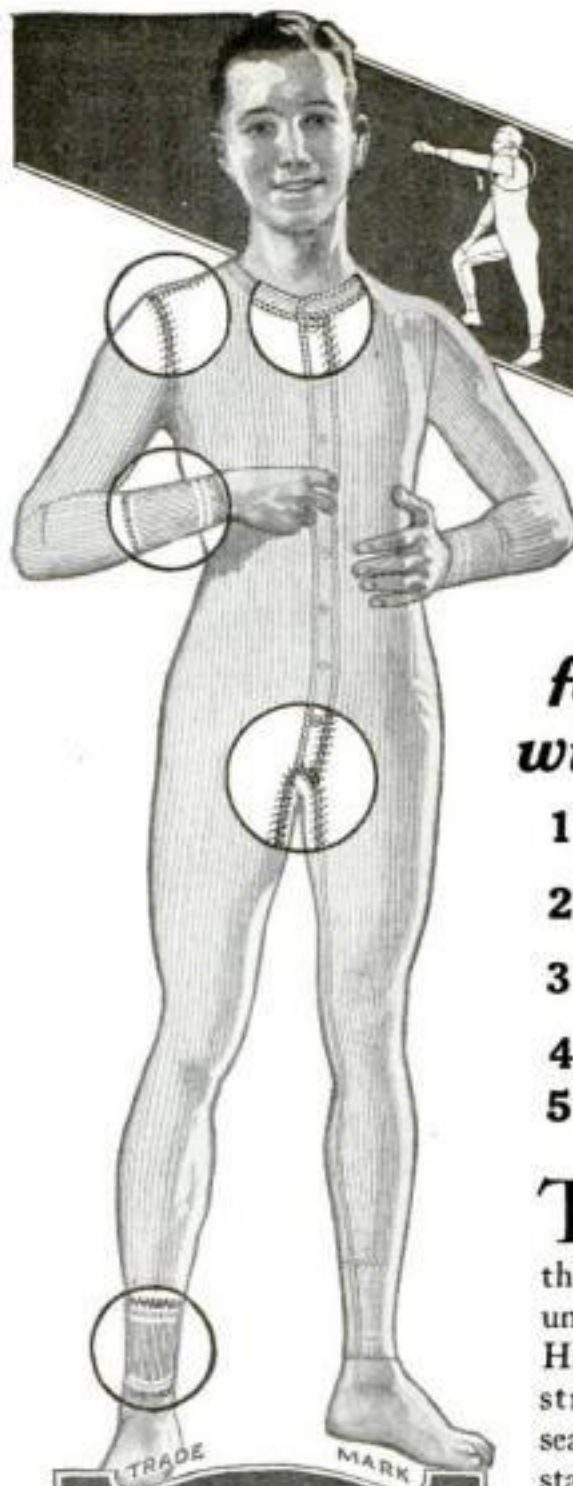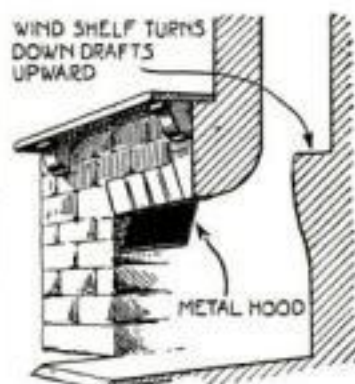

# HANES

ELASTIC KNIT UNDERWEAR

**Hanes for Boys**—Two weights—heavy and extra heavy. Sizes 2 to 16 years. Also knee length and short sleeves.

If your dealer can't supply you, write direct to us.

**P. H. HANES KNITTING COMPANY, Winston-Salem, N. C.**

*Next summer wear Hanes full-cut athletic Union Suits!*

## THE WIRELESS EXPERIMENTER'S MANUAL

E. E. Bucher

This book thoroughly covers the entire field of amateur radio work, including the theory and design of amateur wireless transmitters and receivers, the construction of transformers, high voltage condensers, spark gaps, aerials, masts, and receiving sets for long and short wave reception.

330 pp. Fully illustrated. Price \$2.25  
POPULAR SCIENCE MONTHLY

225 West 39th Street New York City, N. Y.

## Radio Hook-Ups

In this book are shown all the best circuits for damped and undamped wave receiving sets, buzzer, spark coil and transformer sending equipment, as well as vacuum tube telegraph and telephone transmitters, wavemeters, vacuum tube measuring instruments, audibility meters, etc.

Price, 75 cents

POPULAR SCIENCE MONTHLY

225 West 39th Street New York City, N. Y.

**DIAMONDS**

Here at 60% of Market Price

This snappy perfectly cut diamond 7-8-3-32 ct. at \$52.50 among bargains we list. Many other big values in our lists. Buy HERE. Loan values the price basis, not market values. This 75 year old diamond banking firm has thousands unpaid loans and other bargains must sell NOW.

**Why Pay Full Prices**

Any diamond sent for absolutely free examination at our risk. No obligation. No cost to you.

**Send for Latest List**

Diamond Bargains described in detail. Tells of guaranteed loan values, unlimited exchange privilege, details of free examination. Send now.

JOS. DE ROY & SONS 4792 DeRoy Bldg. Only Opposite Post Office, Pittsburgh, Pa.

**BUILDING TRADES HAND BOOK**

I.C.S. BUILDING TRADES' HANDBOOK

409 Pages 263 Illustrations

A reference book for every man connected with the building trades. Contents:—Blue Prints, Weights and Measures, Formulae, Mensuration, Geometric Drawing, Structural Design, Materials of Masonry Construction (stone, brick, terra cotta, lime, cements, sand, mortar, concrete), Carpentry and Joinery, Roofing, Plumbing, Heating, Estimating, etc.

409 pages. 263 illustrations. Only \$1. Money back if desired. Address—International Correspondence Schools, Box 7612-C, Scranton, Pa.

**\$1**

## HANES GUARANTEE:

We guarantee Hanes Underwear absolutely—every thread, stitch and button. We guarantee to return your money or give you a new garment if any seam breaks.

**5 HANES**  
features that will appeal to you

- 1 Hanes Staunch Elastic Shoulders are made with service-doubling lap seam. They fit right, with plenty of "give."
- 2 Hanes Tailored Collarets won't gap or roll. Fits snugly around the neck and keeps the wind out.
- 3 Hanes Elastic Cuffs are made far stronger and better than the usual cuff. They fit the wrist firmly and won't flare or rip.
- 4 Hanes Closed Crotch is cut and stitched in a special way that really keeps it closed.
- 5 Hanes Elastic Ankles hold their shape through repeated washings. They never bunch over your shoes.

THESE big features alone are enough to give men folks a friendly feeling for this high-grade, popular-priced winter underwear. But there are other important Hanes features too—strain points that are strongly reinforced; flat, non-irritating seams that hold fast; buttons that actually stay put; buttonholes that keep their shape. And all covered by the Hanes money-back guarantee.

If you want underwear this winter that will give you perfect comfort and long wear—and at a very low price—buy Hanes.

The Hanes winter underwear line includes heavy-weight shirts and drawers and heavy union suits in two weights.



# HOMCHARGE



your  
**RADIO  
BATTERY**  
for  
**A NICKEL**

**E**NJOYABLE RADIO CONCERTS and maximum receiving range are obtained only when your battery is fully charged. Don't be bothered with the inconvenience and expense of taking your battery to a service station every few days for recharging. The

**RADIO  
HOMCHARGER  
DE LUXE**

has been designed especially for this purpose. It charges your "A" or "B" battery over night without removing from the living room, and is the only rectifier on the market combining the following essential HOMCHARGING features:

- 1—Simplicity itself—attach to any lamp socket and connect battery.
- 2—Self-polarizing. Battery may be connected either way and always charge.
- 3—Fully automatic in operation—gives taper charge—cannot overcharge or injure your battery.
- 4—Safe. All parts entirely enclosed. No danger from fire. APPROVED BY UNDERWRITERS EVERYWHERE.

- 5—Silent in operation. May be used in the home.
- 6—Constructed of the best material—genuine Bakelite Panel, Jewell Ammeter, closed Core Silicon Steel Transformer. No castings used, only the finest stampings throughout. UNQUALIFIEDLY GUARANTEED.
- 7—Only one moving and two wearing parts replaceable as a unit at small cost.
- 8—Uses Standard 15 Amp. Fuse Plug, obtainable at any electrical store.

## AN ORNAMENT FOR YOUR LIVING ROOM

Beauty has been combined with utility in the NEW RADIO HOMCHARGER DE LUXE. The body is beautifully finished in rich Antique Mahogany—the base and fittings in a handsome dull gold. Equipped with rubber feet, it cannot mar polished surfaces. It harmonizes with the finest living room.

## OVER 50,000 HOMCHARGERS IN USE

50,000 users have heartily endorsed the HOMCHARGER. Beware of imitations when buying as there is only one HOMCHARGER. Insist on the genuine which bears our registered trade name, HOMCHARGER.

Furnished complete. No extras to buy. Price \$18.50 at all good dealers, or shipped prepaid upon receipt of purchase price.

Booklet illustrating the NEW RADIO HOMCHARGER DE LUXE in actual colors is FREE for the asking. Send for your copy today.

**DEALERS—JOBBER:** Over 150,000 HOMCHARGERS will be sold this fall and winter. Send for your copy of "HOMCHARGER Business Builders" and see how you can get your share of this business.

**The Automatic Electrical Devices Co.**

131 West Third Street

Cincinnati, Ohio

Largest Manufacturers

of

Vibrating Rectifiers in the World



TYPE "A" FOR WALL MOUNTING

— OVER 50,000 IN USE —

## BRANCH OFFICES

New York Chicago Pittsburgh  
Detroit Dallas  
Philadelphia Los Angeles  
Baltimore Minneapolis Atlanta  
St. Louis Kansas City

## Your Home Heating Plant

(Continued from page 105)

opening with a hood. This can be made at home of sheet iron or a hood may be purchased and fixed into the fireplace.


A great deal can be done to conserve heat in houses, stores and offices by preventing unnecessary waste of warm air.

The first thing for the home worker to do when cold weather starts is to place weather strips on doors and windows. (See illustration at bottom of page 78.)

Try each window in turn and see if the sash rattles. For each window that is not absolutely tight, obtain 8 or 9 ft. of ordinary weather strip. This should be nailed with 1-in. brads to the blind-stop around the side and top of the window frame, outside the upper sash. Carry down the strips as far as the lower edge of the meeting rail. Be sure to press the weather strip against the sash so that it is a snug fit and yet not so tight that the sash sticks.

If the sash lock does not pull the meeting rails close, take off half of the catch, plug the holes, and replace it farther from the other so that the cam action will draw the meeting rails tightly together. If this does not make the window perfectly airtight, pry off the window stops, which are strips about  $\frac{1}{2}$  by  $1\frac{1}{2}$  in. on the inside, remove the nails by pulling them through the back, or cut them off and nail the stops back so as to hold the sash tightly. No


more play than the thickness of a piece of paper should be left between the stops and the lower sash.

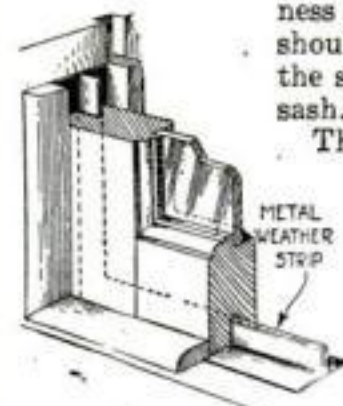

The upper sash should have sufficient room to slide easily when started. It is not necessary to apply weather strips to the lower sash as a rule, although metal weather strips of

ingenious design can be obtained for going all around windows, even under the bottom rail, and making them almost completely airtight. To attach this kind of weather strip, ordinarily the sash must be removed; but the strips can remain on all the year, as they practically become a part of the window.

It is equally important to have the outer doors fit well, especially if storm doors or

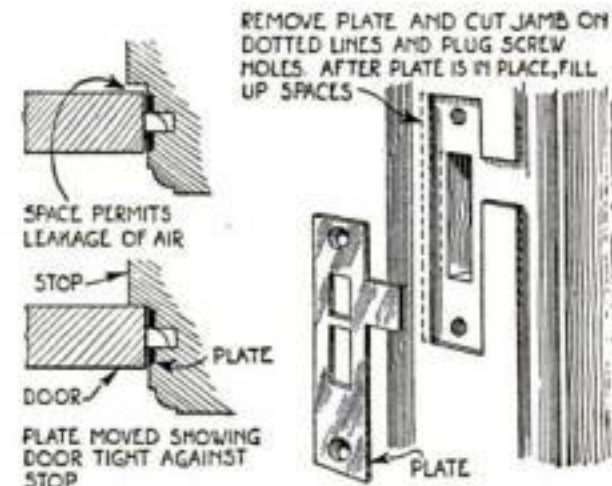

Adjusting the strike-plate to make door fit better

vestibules have not been provided to form insulating pockets of air. The first step in fixing a door that is not tight is to remove the strike plate in the door jamb, plug the

(Continued on page 107)

## WE TEACH COMMERCIAL ART

Meyer Both Company, the largest commercial art organization in the field, offers you a different and practical training. If you like to draw, develop your talent. Study this practical course—taught by this widely known institution, with twenty-two years success—which each year produces and sells to advertisers in the United States and Canada over ten thousand commercial drawings. Who else could give you so wide an experience? Commercial art is a business necessity—a highly paid, intensely interesting profession, equally open to men and women. Home study instruction. Get facts before you enroll in any school. Write for our illustrated book, "YOUR OPPORTUNITY"—for one-half the cost of mailing—four cents in stamps.

**MEYER BOTH COLLEGE  
OF COMMERCIAL ART**

Michigan Ave. at 20th St., Dept. 35 CHICAGO, ILL.

NOTE—To Art and Engraving Firms: Secure practical artists among our graduates. Write us.

## Why Good Dancers Are Popular

EVERYONE admires and wants to dance with the person who knows the latest steps. There is no need of being a wallflower! By my remarkable new easy method, anyone can learn the newest dances at home in a few hours. Much less expensive than from a personal teacher. No music or partner needed. So simple even a child can learn quickly. 60,000 have learned dancing by mail. Your own success is guaranteed.

To prove I can quickly and easily make you an accomplished dancer, I will send you FREE, in plain cover, a lesson in Fox Trot, Secret of Leading and How to Gain Confidence. For mailing of free lessons, send 10c. Learn in private—surprise your friends. Act now and be a good dancer soon!

**ARTHUR MURRAY, Studio 450, 100 5th Ave., N. Y.**

**PRICES SMASHED \$3.00**

**10 Days FREE Trial** World's best makes—Underwood, Remington, Oliver—at big saving. Every machine fully rebuilt to look and work like new. Guaranteed for 10 years. Send no money—big Free Catalog shows how to save money on type writers. Easy terms. Write today.

**INTERNATIONAL TYPEWRITER EXCHANGE**  
177 N. State St. Dept. 11-65 Chicago





## THE HOME WORKSHOP

## Your Home Heating Plant


(Continued from page 106)

screw holes, chisel the mortise a little wider, and refit the plate so that it will hold the door closer to the door stop. A piece of weather strip should then be fastened on the bottom of the door with 1-in. brads or 1-in. No. 6 round-head screws. Place this on the side where it will not interfere with the opening of the door. If there are still any cracks, nail weather strip on both sides and at the top of the door-jam outside so that the rubber will press gently against the door when it is closed and locked. With exceptionally bad doors, it is sometimes advisable to nail strips of regular door stop  $\frac{1}{2}$  by  $1\frac{1}{2}$  in. around the jam so that it will be a tight fit against the door, and then place weather strip on top.

WEATHER STRIP ON DOOR JAMB



When the doors and windows are all tight, it is well to see if there are any places where warm air can escape from warm rooms either to the cellar or attic or through the house wall. The wall of a frame house itself is usually built so as to contain a number of air cells, as it were, since the building regulations usually provide for fire stops and the like to break up the long spaces between studs. Take the precaution, however,

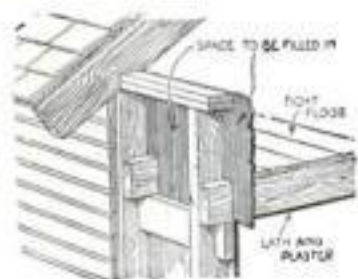

to see that none of these wall spaces, which are so important in insulating the house, open into the attic or cellar. If any of them do, cover the spaces with building paper, wall board, plaster board, or strips of wood. If the attic is of the unfinished variety and has no floor, the beams should be carefully covered with building paper, if nothing better, so as to provide a "dead" air space between the ceiling of the rooms on the upper floor and the attic.

In the same way, if there are any places where the cellar air can penetrate between the inner and outer walls of the house, those openings should be closed with building paper.

The importance of taking these precautions becomes more apparent when it is remembered that lath and plaster do not form a good insulator. That is why it is desirable to have a layer of building paper over the inside of the studs as well as between the sheathing and the siding or other finishing material on the outside of a frame dwelling.

Dead air spaces are the best insulators

(Continued on page 108)



Catalog Number Four contains Marvelous article on tuning Receiving Sets. 10 cents brings it to you.

## TOUCH DOWN!

Football returns by radio have almost the thrill of "Touchdown!" Perhaps you cannot attend the Big Game. You can get the returns on a **Tuska Radio Receiver!**

**Tuska Radio Apparatus** is the leader. First in Service. Highest in quality. Best in Price.

Examine **Tuska Radio** at your dealer's today.

**THE C. D. TUSKA COMPANY**  
20 Bartholomew Ave., Hartford, Conn.

# TUSKA RADIO

Established 1911



This Big  
 $\frac{1}{4}$  h. p. motor **\$13.50**  
For a Little While  
Longer at—

F. O. B.  
CHICAGO

(NO TELLING WHEN PRICE WILL ADVANCE)

Steadily increasing cost of fuel, power, labor and material may force us to raise our price on this big, sturdy, 28-lb., 60 cycle split-phase A. C. Motor; but we'll hold the price down to this competition-defying level as long as ever we can.

A wonderful fan-cooled, squirrel-cage, split-phase motor, tested for 50% overload before leaving factory, and guaranteed for 1 year! Its speed of 1740 r. p. m. fits it exactly for such service as drills, small lathes, fans, blowers, forges; household washing machines, cream separators and all forms of motor drive calling for  $\frac{1}{4}$  h. p. and a capacity for temporary overload.



**COMBINED GRINDER AND BUFFER \$25.00**  
Complete with Above Motor

Machine has handy on-and-off lever in front, with switch enclosed in and protected by base. Grinding wheel is 6 in. in diameter, with  $\frac{1}{2}$  in. face; Buff 7 x  $\frac{1}{2}$  in., unsewed. Motor is same as described above except that it is totally enclosed and dust-proof.

Also ask for our line of Motors and Generators for Radio Service.

**Send Cash With Order**, as these low prices permit of no book-keeping, billing or collection expense.

Our money-back plan and our guarantee fully protect you.

**NORTHWESTERN ELECTRIC CO.**

410 S. Hoyne Street

CHICAGO, ILL.



# COLUMBIA RADIO PARTS

## INSURES MAXIMUM EFFICIENCY



Columbia Moulded Variometer

A superior instrument with the Stator and Rotor of moulded hard rubber. Accurate electrical and mechanical construction throughout; designed for best values of maximum and minimum inductance and minimum distributed capacity. Has 3/16" shaft, with spring tension to secure electrical contact. Adapted for both base and panel mounting. All metal parts highly nicked. An essential radio instrument of beauty and efficiency.

Price  
\$5.50  
With Dial  
\$6.50

Columbia 180°  
Moulded Variocoupler

A MOST efficient 180° coupler designed for sharp tuning from 150 to 650 meters. Stator made of a highly dielectrical composition. Rotor of moulded hard rubber; both wound with green silk covered wire. All metal parts nickel plated and mechanically correct. Ten taps are provided. Has 3/16" shaft with spring tension to insure electrical contact; base and panel mounting.



Price  
\$5.00  
With Dial  
\$6.00

**JOBBER & DEALERS**—These are two of the several efficient instruments we manufacture. A NUMBER OF SELECT TERRITORIES ARE STILL OPEN. WRITE OR WIRE FOR OUR ATTRACTIVE DISCOUNTS. Quick deliveries assured.

## COLUMBIA RADIO CORPORATION

2762 Diversey Avenue

CHICAGO, ILL.

# Easy to Play Easy to Pay

Clyde  
C. Doerr,  
B. M.,

Director Club Royal Orchestra, makers of Victor Records for dancing. Hear their Buescher instruments on your phonograph.

## The Most Prominent Professionals

Use True-Tone Musical Instruments. They have helped make famous Paul Whiteman, Tom Brown, Art Hickman, Donald Clark, Clay Smith, Guy Holmes, Meyer Davis, Joseph C. Smith, Ben Selvin, Ben Krueger, Henry Santrey, Vincent Lopez and thousands of others. \$500 to \$1,000 weekly for but two hours a day is not uncommon for musicians of such ability to earn. You may have equal talent and enjoy the most pleasant of vocations.

75% of all popular phonograph records are played with Buescher instruments.

## Free Saxophone Book

After nearly 300 years' string instruments are tiredly displaced by Saxophone. Our Free Saxophone Book tells which Saxophone takes violin, cello and bass parts, and many other things you would like to know. Ask for your copy.

**Sax Invented the Saxophone  
Buescher Perfected It**

You will be astonished at the ease with which you can master a Saxophone. It is the easiest of all wind instruments to play and one of the most beautiful. Three first lessons sent free. You can learn the scale in an hour's practice and play popular music in a few weeks. Practice is a pleasure because you learn so quickly. You can take your place in a band within 90 days if you so desire.



## True-Tone Saxophone

Unrivalled for home entertainment, church, lodge or school. In big demand for orchestra dance music. Buescher popularity and superiority is proven by the fact that Buescher makes more Saxophones than all other manufacturers combined.

## Free Trial—Easy Payments

You may order any Buescher Saxophone, Cornet, Trumpet, Trombone, or other Band or Orchestra Instrument without paying in advance, and try it six days in your own home, without obligation. If perfectly satisfied, pay for it on easy payments to suit your convenience. Mention the instrument interested in and a complete catalog will be mailed free. Send the coupon for a free copy of the most interesting booklet on the Saxophone ever published.

## BUESCHER BAND INSTRUMENT CO.

Makers of Everything in Band and Orchestra Instruments  
3165 Buescher Block Elkhart, Indiana.

## BUESCHER BAND INSTRUMENT CO.

3165 Buescher Block, Elkhart, Indiana

Kindly mail to me Saxophone Book.

Shall we also send you free Complete Catalog of all Buescher True-Tone Brass Band Instruments?

Name.....

P. O. Address.....

Instrument I play is.....

## THE HOME WORKSHOP

## Your Home Heating Plant


(Continued from page 107)

of relatively low temperature. Therefore, if it is desired to insulate the hot air pipes in the cellar, they should be covered with corrugated insulating material or asbestos at least 1/4 in. thick and not with solid asbestos, cement or paper. Conversely, if pipes—such as steam or hot water—are radiating heat at relatively high temperatures, they are best insulated with solid material.

The customary way of insulating pipes of the latter kind is to cover them with 1 in. thick asbestos or magnesia sections, covered with canvas. These sections are secured in place by lacquered brass bands.

Another method is to apply asbestos cement, which is obtained in powdered form and mixed with water. This is then covered with canvas and usually a coat of ordinary cement and water is applied to the whole with a brush.

In the various types of moderately priced frame dwellings now being built in vast numbers throughout the country, projections from the first floor are often used to break up the monotony of the otherwise boxlike construction and to give additional floor space without a corresponding increase of the cost of the foundation. Since these projections are usually exposed to the

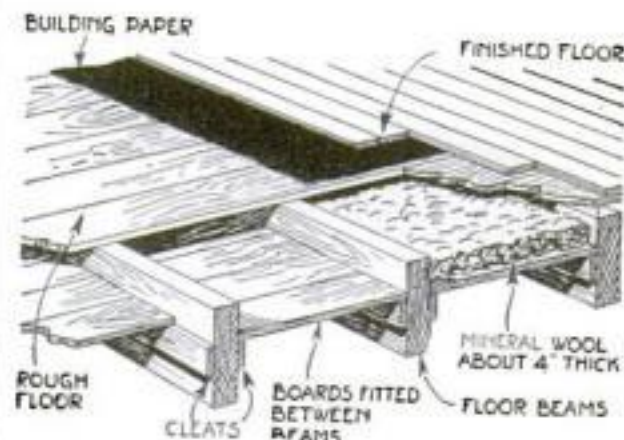

Method of placing mineral wool beneath floor. It also can be packed between inside and outside walls where necessary

weather underneath, it is most important that the floors should be properly insulated.

The standard method of providing this insulation, and the easiest for the home worker to apply, is to place a layer of mineral wool below the floor, as shown. Even ashes are better than nothing.

Storm sash, doors, and porches should always be placed on an exposed side of a house facing the prevailing winter winds.

It is not difficult to fit and hang sash. Two thin rods should be used for measuring. Cut one the exact height of the window frame opening, and the other, the width. Test each sash with these and, if it is too large, plane it off. Bevel the bottom edge to conform with the slant of the sill.

Special hardware can be obtained for hanging the sash and to allow it to be pushed open at the bottom for ventilation. Sash also can be obtained with one small pane, arranged to open like a small door, for purposes of ventilation, or with a ventilator in the bottom sill.

It is possible for the home worker to make his own sash without much difficulty and at some saving in expense. One of the simplest ways of doing this was described in POPULAR SCIENCE MONTHLY for last February, and working drawings for a simple, yet unusually attractive looking storm porch were given in the Home Workshop Department of last January.




## THE HOME WORKSHOP

## Easily Made Hygrometer Will Measure Humidity in Air

By Capt. E. A. McCann

ONE of the secrets of heating a house economically and efficiently and keeping it comfortable through the winter months is to provide a sufficient amount of moisture for the air. If the humidity is right, a temperature of 65 or 67 degrees will feel as warm as a temperature of 70 degrees or more when the air is dry.

The humidity indoors should be approximately 50 per cent, according to competent heating and ventilating authorities. That is, the air should have half as much moisture as it is capable of holding. We could not live in perfectly dry air, and generally speaking the best degree of humidity for us is about 66 per cent, but with ordinary

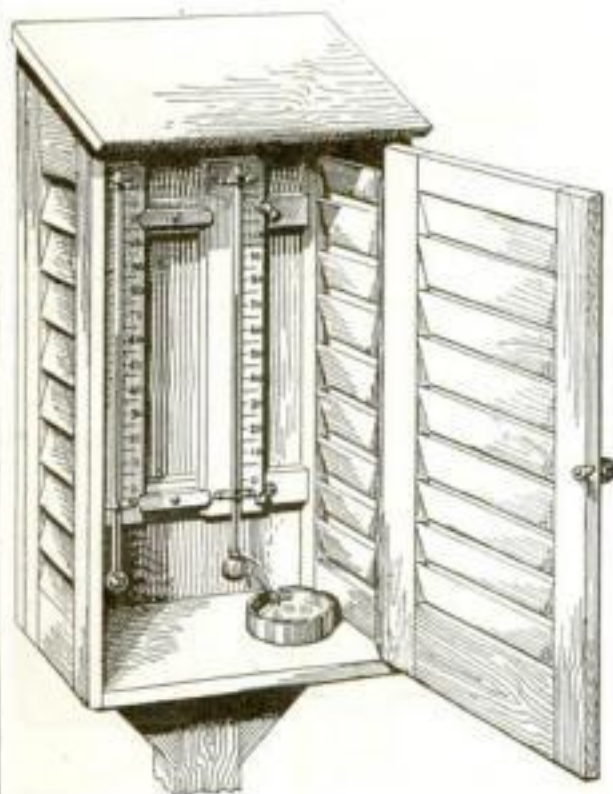

The hygrometer consists of a wet and dry thermometer, the readings of which are compared in computing the humidity. For indoor use the instrument does not need to be housed

heating plants it is usually next to impossible to maintain even 50 per cent humidity inside our homes in winter.

Temperature and water vapor in the air are, indeed, governing factors of climate and determine the wind and weather of the world, our various climates, and with them, our health and temper.

Humidity is measured by means of a hygrometer. This instrument consists in its simplest form of two thermometers, one wet and the other dry. To make one, therefore, you will require two thermometers. Be careful to see that they register evenly. They are suspended side by side and if they are to be used outside, they should be sheltered in a wooden screen standing about 5 ft. from the ground, with jalousies on three sides so that the air may freely circulate within but the sun and rain be excluded. The top should be slanted and project well from the sides all round. The bottom preferably should have jalousies like the sides.

The two thermometers are kept in position by brass clips or thumbscrews so that they can be removed for cleaning. The bulbs descend clear of the scales or supports.

Around one bulb tie a piece of thin muslin and fasten a few strands of cotton wick to

(Continued on page 110)

## At Last! The Perfect Radio Loud Speaker for the Home

THERE is no other Loud Speaker like the DICTOGRAPH—made expressly for home use by the makers of world-famous Dictograph products—standard everywhere for the finest, most accurate and most sensitive sound-transmission and loud-speaking devices. No other organization in existence has the facilities, the skill, the experience of the Dictograph Products Corporation for producing a perfect Loud Speaker. And the price is only \$20.00 complete with 5 ft. flexible cord.

Price  
**\$20**  
Complete with  
5 ft. flexible cord



## DICTOGRAPH Radio LOUD SPEAKER

Years of experience in producing the marvelously sensitive "Acousticon" for the Deaf, the Detective Dictograph and the Dictograph System of Loud-Speaking Telephones have made possible this wonderful Radio Loud Speaker that reproduces every sound—singing, speaking, instrumental music—in crystal-clear, natural tones, full volume, and Free from Distortion and Noise.

The Dictograph Radio Loud Speaker gives perfect results with any vacuum tube receiving set. No alterations; no extra batteries—you simply plug in and listen. The handsome appearance of this quality instrument harmonizes with any home.

Ask for a Free Demonstration of the Dictograph Radio Loud Speaker at any reliable radio shop. Get DICTOGRAPH quality and still save money.

*The Standard of the World*

The DICTOGRAPH PRODUCTS CORPORATION  
220 West 42d Street (Branches in All Principal Cities) New York City

A beautiful instrument! Finely constructed—richly finished. Its handsome appearance harmonizes with any home. Highly burnished, French lacquered, eleven-inch spun copper bell horn attached to die cast black enamel tone arm, finished with nickel trimmings.

Cabinet 6 x 5 inches base, 4 inches high, of solid, ebony-finished hardwood, mounted upon rubber knobs. Furnished complete with 5 ft. flexible cord. No extra batteries required.

## The Best Head Set at Any Price



## DICTOGRAPH Radio HEAD SET

The Dictograph Radio Head Set has established a standard of quality impossible to secure in any other Head Set. Its use on any receiving set, crystal detector or vacuum tube, improves reception immeasurably.

3000 ohms resistance. Price \$12.—the best Head Set in the world. Regularly furnished as Standard Equipment with the Leading Receiving Sets made.

Dealers: Order through your jobber or write for names of authorized distributors.

## BUILD THIS RADIO RECEIVER



Complete parts, except cabinet, \$13.00. Brings in all big stations. Other models \$5.95 up. Blue print of above instrument 25 cents. Blue prints of Audion Detector, Receiver, Regenerative Receiver, Radio and Audio Amplifier, all for \$1.25. TRIBUNE AIRPHONE CO., Dept. L, Owego, N. Y.

## NEW SINGLE PHASE A. C. MOTORS EMERSON

1/4 H.P.—110 volt, 60 cycle, 1725 speed, complete with cord, plug and grooved pulley—\$13.00



1/4 H.P. \$58.00  
1/2 H.P. 62.00  
1 1/2 H.P. 75.00  
2 H.P. 88.00

General Electric  
1/4 H.P. \$16.50  
1/2 H.P. 39.00

ONE YEAR GUARANTEE

Include Pulley and Base—All Motors 1/4 H.P. or larger, 110-220 Volt Rep. Ind. Type.

Satisfaction guaranteed or money refunded  
Illustrated Catalog of Motors and Supplies FREE  
HYRE ELECTRIC CO., 625X So. Dearborn St., CHICAGO

## Spectacles FREE!

On Trial



Send No Money

Let me send you on Ten Days' Trial a pair of my famous "True Fit" Shell Rim of thousands now in use everywhere. These Glasses will enable anyone to read the smallest print, thread the finest needle, see far or near, and prevent eyestrain or headaches. If after trying them for 10 days and nights you are amazed and delighted, and think them equal to glasses sold elsewhere at \$15.00, send only \$4.49; if you don't want to keep them, return them and there will be no charge. Send no money! Pay no C.O.D.! Simply your name, address and age, and state the length of time you have worn glasses, if any. A beautiful velvet-lined, gold-lettered Spectacle Case FREE. DR. RITHOLZ, Dept. DR 1701, Station C, Madison and Laflin Sts., CHICAGO, ILL.



NAME	POSITION	SALARY
John	AUTOMOBILE ENGINEER	\$125 A WEEK
	REPAIR MAN	\$50 A WEEK
	CHAUFFEUR	\$40 A WEEK

## Put Your Name ON THIS Pay-Roll

Men like you are wanted for big-pay positions in the fascinating field of automobile engineering. We have made it easy for you to fit yourself for one of these positions. You don't have to go to school. You don't have to serve an apprenticeship. Fifteen automobile engineers and specialists have compiled a spare time reading course that will equip you to be an automobile expert without taking any time from your present work.

## AUTO BOOKS

6 Volumes Shipped Free

Now ready for you—an up-to-the-minute six-volume library on Automobile Engineering, covering the construction, care and repair of pleasure cars, motor trucks and motorcycles. Brimming over with advanced information on Lighting Systems, Garage Design and Equipment, Welding and other repair methods. Contains everything that a mechanic or an engineer or motorcyclist or the owner or prospective owner of a motor car ought to know. Written in simple language that anybody can understand. Tastefully bound in American Morocco, flexible covers, gold stamped, 2,650 pages and 2,100 illustrations, tables and explanatory diagrams. A library that cost thousands of dollars to compile but that comes to you free for 7 days' examination.

## Only 10c a Day

Not a cent to pay in advance. First you see the books in your own home or shop. Just mail coupon and pay express charges when books arrive. You can read them and study them for seven whole days before you decide whether you want to keep them or not. If you like the books send only \$2.80 in seven days and \$3 a month until the special introductory price of \$21.80 has been paid. (Regular price \$45.)

## Send No Money Now



Don't take our word for it. See the books without cost. There is so much profit in this offer for you, that we urge you to waste not a moment in sending for the books. Put the coupon in the mails today. Send no money—just the coupon!

American Technical Society, Dept. A-208 Chicago, Ill.

AMERICAN TECHNICAL SOCIETY  
Dept. A-208 Chicago, Ill.

Please send me the 6-volume set, Automobile Engineering for 7 days' examination, shipping charges collect. If I decide to buy, I will send \$2.80 within 7 days and the balance at \$3 a month until the \$21.80 has been paid. Then you send me a receipt showing that the \$45.00 set of books are mine and fully paid for. If I think I can get along without the books after the seven days' trial, I will return them at your expense.

Name .....

Address .....

Employed by .....

## THE HOME WORKSHOP

### Homemade Hygrometer

(Continued from page 109)

the glass tube above, letting them come in contact with the muslin. The strands descend into a small vessel of distilled or clean rain water, placed near the wet and as far as possible from the dry bulb. This arrangement keeps the one bulb wet and the evaporation cools it and causes that thermometer to register lower than the other, the difference varying with the amount of free moisture in contact with the dry bulb.

### Reading the Hygrometer

After you have taken the readings of the wet thermometer and the dry thermometer, subtract the first from the second. If the difference is less than 10, consult Table No. 1; if 10 or more, look at Table No. 2.

In either case, follow down the left-hand column until you reach the number nearest to the reading of the dry thermometer.

From that point follow straight along to the right until you reach the column directly under the figure (on the upper line) that represents the difference in reading between the wet and the dry thermometers. At that point you will find the percentage of humidity. For example: Wet thermometer, 54; dry thermometer, 67; difference, 13; humidity, 39.

TABLE No. 1

Dry Thermometer	Difference in degrees between dry and wet thermometers when less than 10 points								
	1	2	3	4	5	6	7	8	9
0	67	35	.	.	.	.	.	.	.
5	74	48	22	.	.	.	.	.	.
10	78	57	35	14	.	.	.	.	.
15	82	64	47	29	12	.	.	.	.
20	85	70	56	41	27	13	.	.	.
25	87	74	62	50	38	26	14	3	.
30	89	78	67	57	47	36	26	17	.
35	91	82	73	65	54	45	37	28	19
40	92	84	76	68	60	53	45	38	30
45	92	85	78	71	64	58	51	44	38
50	93	87	80	74	67	61	55	50	44
55	94	88	82	76	70	65	59	54	49
60	94	89	84	78	73	68	63	58	53
65	95	90	85	80	75	70	65	61	56
70	95	90	86	81	77	72	68	64	60
75	95	91	87	82	78	74	70	66	62
80	96	92	87	83	79	75	72	68	64
85	96	92	88	84	80	77	73	70	66
90	96	93	89	86	82	79	76	72	69
95	96	92	88	85	81	78	75	71	68
100	97	93	90	86	83	80	77	74	71

(Percentage of humidity)

TABLE No. 2

Dry Thermometer	Difference in degrees between dry and wet thermometers when 10 or more points								
	10	11	12	13	14	15	16	17	18
40	22	16	8	.	.	.	.	.	.
45	32	25	19	13	7	.	.	.	.
50	38	33	27	22	16	11	6	.	.
55	43	39	34	29	24	19	15	10	6
60	48	44	39	34	30	26	22	18	14
65	52	48	44	39	35	31	28	24	20
70	55	52	48	44	40	36	33	29	26
75	58	55	51	47	44	40	37	34	31
80	61	57	54	51	47	44	41	38	35
85	63	60	56	53	50	47	44	41	38
90	66	63	60	58	55	52	49	47	44
95	65	62	59	58	56	53	50	47	44
100	68	65	62	59	57	54	51	49	47

(Percentage of humidity)

When taking readings, be careful to note that the wet bulb is wet, and the dry one dry; if the latter has become wet, it will register as a wet bulb for the time being.

(Continued on page 111)

## Let Diamonds say Merry Xmas

FOR A FEW CENTS A DAY

NO MONEY DOWN



THIS startling diamond value pictured can be yours without risking a single penny. Each item is ideally suited for a Christmas gift. Your selection sent on your simple request without a single penny down. If you don't agree that it is the biggest bargain you ever saw, return it for a refund. If you keep it, pay at the rate of only a few cents a day.

### YEARLY DIVIDENDS

You are guaranteed 8 Per Cent, yearly increase in value on all diamond exchanges; also, 5 Per Cent. bonus privilege.

### MILLION DOLLAR BARGAIN BOOK FREE

The Greatest Bargains in America are pictured in our new MILLION DOLLAR BARGAIN BOOK. Send for your copy today to Dept. 1708. See these wonderful bargains for yourself under the Lyon Change Account Plan.

**J.M. LYON & CO.**  
2-4 Maiden Lane N.Y.  
In Business Nearly 100 years

## GUARANTEED MOTORS AT A BARGAIN PRICE



1/6 HP.  
\$10

### THEY'RE RELIABLE REYNOLDS MOTORS

These are new, first-quality motors. Made and guaranteed by a big, responsible house. They cost us more than \$10 to make. We had them all ready for assembly when orders were cancelled. You save more than half.

### JUST THE THING FOR HOUSE, GARAGE, SHOP

Deliver full 1-6 H.P. with liberal overload capacity, 1750 R. P. M. Alternating current, 110 V. 60 Cy. (also for 25, 30, 40, 50 Cy. or 220 V., at \$1.00 extra.) Suitable for washing-machine, ironer, dish-washer, compressor, bench lathe, blower, fan, drill press, scroll saw or any small machine around house, shop, garage.

### MADE AND GUARANTEED BY WELL KNOWN HOUSE

Low price may not mean a bargain in a motor. A low grade, unreliable, short-lived motor is expensive at any price. But these are new, high grade, Reliable, Reynolds Motors—a motor bargain at \$10—that you are not likely to meet again.

### SOLD ON MONEY BACK GUARANTEE

New motor or free repairs if anything goes wrong within one year. Parts always obtainable. Net weight 20 pounds, shipping weight 26 pounds. Easy means of reversing direction of rotation. 10 ft. cord with attachment plug, 50c. Pulleys, 1 1/2 inch or 2 inch, 50c.

Send cash or order C. O. D. by express.

**REYNOLDS**  
ELECTRIC COMPANY

2612 W. Congress Street, — Chicago, Illinois

## How to Become A Master of English

Is a valuable FREE booklet which proves that the Kleiser Mail Course in Practical English and Mental Efficiency will teach you to Write Stories that Sell—Literature that will Compel Attention; it will show you how to Enlarge your stock of Words—Use the Right Word in the Right Place—Prepare Sermons, Addresses, Advertisements, Letters, etc.

### BOOTH TARKINGTON

Distinguished Novelist: "Your course is almost painfully needed by many professional writers and speakers. A student who intelligently follows your Course will know what he is talking about when he talks or when he writes." Famous Writers, Business and Professional Men, Speakers and others are sending enthusiastic letters telling how the Course has enlarged their mental capacity. Increased their incomes. It will do the same for YOU. Send to-day for the free booklet to FUNK & WAGNALLS COMPANY, Dept. 606, New York, N. Y.

**CONSTRUCTION OF INDUCTION COILS and Transformers.** By T. S. CURTIS. Open and closed core transformers are both taken up. Price 25 cents

Popular Science Monthly - 225 West 39th Street, New York





## "\$60 more a month!"

"Last night I came home with great news—a \$60 increase in salary! I took the money out of my pocket and asked Mary to count it. You should have seen her face light up when she found the extra \$60. I think she was even happier than I was, for it was the third increase in a year."

"To-day I am manager of my department—earning more money than I ever thought it would be possible for me to make. I owe it all to the training I received from the International Correspondence Schools. That little coupon was the means of changing my whole life."

How much longer are you going to wait before taking the step that is bound to bring you more money? Isn't it better to start now than to wait for years and then realize what the delay has cost you?

One hour each night spent with the I. C. S. in your own home will prepare you for the position you want in the work you like best.

Don't let another priceless hour go to waste! Without cost or obligation, let us prove that we can help you. Mark and mail this coupon.

### INTERNATIONAL CORRESPONDENCE SCHOOLS Box 7610-C, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

#### BUSINESS TRAINING DEPARTMENT

- |   |   |
|---|---|
| <input type="checkbox"/> Business Management                              | <input type="checkbox"/> Salesmanship           |
| <input type="checkbox"/> Industrial Management                            | <input type="checkbox"/> Advertising            |
| <input type="checkbox"/> Personnel Organization                           | <input type="checkbox"/> Better Letters         |
| <input type="checkbox"/> Traffic Management                               | <input type="checkbox"/> Foreign Trade          |
| <input type="checkbox"/> Business Law                                     | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law                          | <input type="checkbox"/> Business English       |
| <input type="checkbox"/> Accountancy (including C.P.A.)                   | <input type="checkbox"/> Civil Service          |
| <input type="checkbox"/> Nicholson Cost Accounting                        | <input type="checkbox"/> Railway Mail Clerk     |
| <input type="checkbox"/> Bookkeeping                                      | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary                                | <input type="checkbox"/> High School Subjects   |
| <input type="checkbox"/> Business Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating           |

#### TECHNICAL AND INDUSTRIAL DEPARTMENT

- |   |  |
|---|--|
| <input type="checkbox"/> Electrical Engineering                           | <input type="checkbox"/> Architect                                   |
| <input type="checkbox"/> Electric Lighting                                | <input type="checkbox"/> Blue Print Reading                          |
| <input type="checkbox"/> Mechanical Engineer                              | <input type="checkbox"/> Contractor and Builder                      |
| <input type="checkbox"/> Mechanical Draftsman                             | <input type="checkbox"/> Architectural Draftsman                     |
| <input type="checkbox"/> Machine Shop Practice                            | <input type="checkbox"/> Concrete Builder                            |
| <input type="checkbox"/> Railroad Positions                               | <input type="checkbox"/> Structural Engineer                         |
| <input type="checkbox"/> Gas Engine Operating                             | <input type="checkbox"/> Chemistry <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Civil Engineer                                   | <input type="checkbox"/> Automobile Work                             |
| <input type="checkbox"/> Surveying and Mapping                            | <input type="checkbox"/> Airplane Engines                            |
| <input type="checkbox"/> Metallurgy                                       | <input type="checkbox"/> Agriculture and Poultry                     |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics                                 |

Name.....

Street Address.....

City.....State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.



Masterpieces! Master craftsmen make and fit Keen Kutter knife parts so exactly they seem grown together. The finished knives reflect this workmanship.



Simmons Hardware Company

# KEEN KUTTER

## THE HOME WORKSHOP

### Homemade Hygrometer

(Continued from page 110)

For indoor use the screen is not necessary. With the temperature of a room at 50 degrees, each cubic foot of air should contain 3 gr. aqueous vapor; at 60 degrees, 4 gr.; at 70 degrees, 5 gr.; that is, when the dry bulb stands at those points, the wet should show 45, 54, and 63 degrees respectively to give 66 per cent humidity. The figures are not the absolute amount of water vapor in the air, but the relative humidity with regard to the temperature at the time, because warm air holds more moisture than cold. Thus at 32° F., 1 c. ft. of air can hold nearly 3 gr. of aqueous vapor; at 60 degrees it will hold 6 gr.; then for every increase of 27 degrees the holding capacity of a cubic foot is doubled. At a temperature of 30 degrees, for instance, the relative humidity of 90 per cent corresponds to 0.149 in. of vapor pressure, while 60 per cent at 80 degrees equals 0.511 in., or more than three times as much.

### Hygrometer Not Affected by Frost


In frosty weather, when the muslin is thinly coated with ice, the readings are still valid, because evaporation takes place as freely from the surface of ice as from water, but if it is dry, wet it and let it freeze.

You can often foretell frost with this instrument, and so perhaps save delicate plants. When the temperature is below 45 degrees, take the difference between the readings and multiply by 25, subtract this from the reading of the dry bulb, and the result will indicate approximately the temperature to which the air will fall during the coming night. Moist winds or increasing cloudiness will, of course, sometimes falsify this forecast.

### How to Fasten a Bolt in End of Pipe or Radio Mast

ON MANY occasions it is necessary to make a fastening at the end of a pipe in connection with a wireless mast, awning work, hand rail attachments, framing, and the like.

To hold a bolt in the open end of a pipe and leave the end portion protruding is

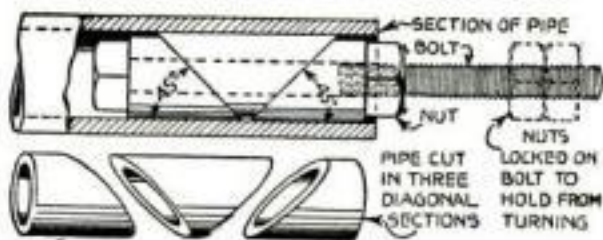

Tightening the nut expands the three pieces of pipe in the bore

easily accomplished in such cases if the method illustrated is followed.

First obtain a 4- or 5-in. length of pipe smaller in diameter than the pipe to which the bolt is to be secured. Saw two cuts diagonally across the piece so as to separate it into three parts. The bolt is placed through these and they are inserted in the end of the pipe. The nut is then set up solidly so that the outside of the segments presses against the inside of the pipe.

The bolt can be tightened by taking up the nut. To hold the bolt from turning while tightening the nut, lock two nuts tightly at the end of the bolt to give a grip.—G. A. LUERS.

# 21 Jewel Burlington



## LOOK!

Adjustable to the Second  
Adjusted to Temperature  
Adjusted to Isochronism  
Adjusted to Positions  
21 Ruby and Sapphire Jewels  
25 Year Gold Strata Case  
Your Choice of Dials—  
(Including Montgomery R. R. Dial)  
New Ideas in Thin Cases.

# Only \$1.00 Down

Only One Dollar Down will buy this masterpiece of watch manufacture. The balance you are allowed to pay in small, easy monthly payments. The Burlington—a 21-Jewel Watch—is sold to you at a price much lower than that of other high-grade watches. Besides, you have the selection of the finest thin model designs and latest styles in watch cases. Don't delay! Write for the FREE Watch Book and our Special Offer today.

# Write

While this Special Offer Lasts

Get the Burlington Watch Book by sending this coupon. Find out about this great special offer which is being made for only a limited time. You will know a great deal more about watch buying when you read this book. You will be able to "steer clear" of the over-priced watches which are no better. Remember, the Burlington is sent to you for only One-Dollar down, balance in small monthly payments. Send the coupon for watch book and our special offer Today! Do not delay one minute!


Burlington Watch Co., Dept. 1368  
19th St. and Marshall Blvd., Chicago, Illinois  
Canadian Address: 62 Albert St., Winnipeg, Man.

Please send me (without obligations and prepaid) your free book on watches with full explanation of your \$1 down offer on the Burlington Watch.

Name.....

Address.....



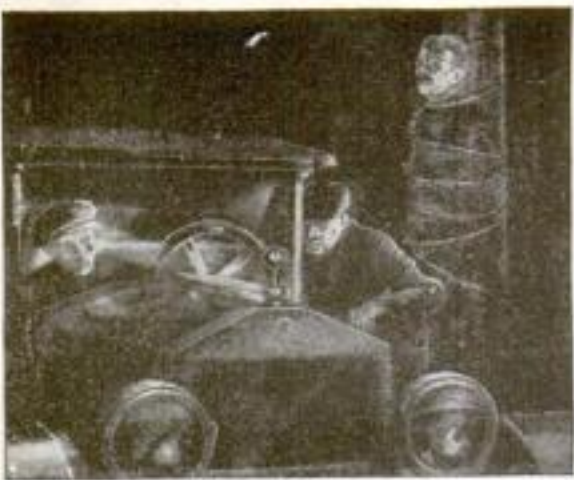

# FREE

## Actual Reports of Secret Service Operator 38

HERE is something money can't buy. More fascinating than detective stories. Confidential reports of a real operator—No. 38—to his Secret Service Bureau, headed by the most famous detective in America. Absolutely free. No cost. No obligations. Don't fail to send for them.

They may point the way to Big Money for you. See how the modern detective works. Read these inside stories of the solution of great mysteries. See what possibilities this most fascinating and eventful of all professions offers to you—and how you may fit yourself for it.

## Be a Finger Print Expert

To command the highest fees, the Secret Service man must also be a Finger Print Expert. These reports show why. This profession may be easily learned at home, in your spare time. Wonderful opportunity in this UNCROWDED, PROFIT-ABLE field.

## Make \$5,000 to \$10,000 a Year

The unfilled demand for trained Finger Print men is increasing daily. Opportunity is waiting for you. No time to lose. Send today for these Reports, also our big Free book on Finger Prints. Gives all particulars and success stories of our graduates! Brilliant future ahead if you act now.

## Learn at Home in Spare Time

And now you can learn the secrets of this science at home in your spare time. Any man with common school education and average ability can become a Finger Print Detective in surprisingly short time.

## Special Offer Limited Time

Everyone getting these Free Reports will also receive my Special Offer of a Professional Finger Print Outfit, absolutely FREE. Made for a limited time only. Send coupon today—sure. Reports, Finger Print Book, and special outfit offer, all Free and Prepaid. Don't delay and perhaps forget. Do this right now.



← Also  
**FREE**

Send the coupon

**UNIVERSITY OF  
APPLIED SCIENCE**

1920 Sunnyside Ave., Dept. 1368, Chicago, Ill.

T. G. COOKE, Pres. University of Applied Science  
1920 Sunnyside Ave., Dept. 1368, Chicago, Ill.

Dear Mr. Cooke: Please send me FREE and prepaid, Reports of Operator 38, your new illustrated book on Crime and Crime Detection and your Special Outfit Offer. It is fully understood I assume no obligation.

Name.....Age.....

Address.....


Town.....State.....

## THE HOME WORKSHOP

### Easily Made Wooden Flower Box Has Water Reservoir

HOUSE plants flourish in the wooden flower box illustrated, which has a self-contained reservoir for water. The water is poured down the tube shown in the upper right-hand corner of the photograph, and rises from the bottom up into the soil. This prevents the caking of the earth around the plant.

Above the bottom of the box is a second bottom, the space between being about 5/16 in. in depth. This second bottom is not fitted closely because room must be allowed for expansion and to permit the water to rise. The inner bottom also has a

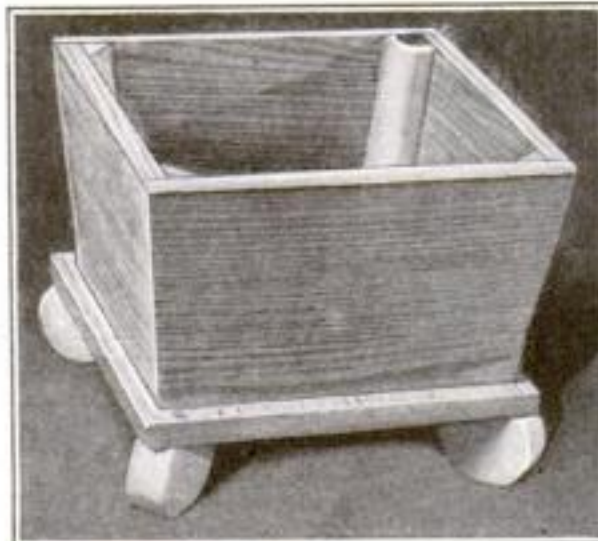

Water poured through hole visible in upper right-hand corner is stored between double bottoms

1 3/4-in. hole in the center through which the water passes upward. This hole is filled with a sponge to prevent the earth from falling through into the reservoir. Four short lengths of dowels are set into the under surface of the inner bottom to hold it up.

Making this box is what teachers call a butt-joint job and is, therefore, comparatively simple, but the joints have to be watertight, so good workmanship is required. The first model was made with mitered joints, which look better but are more difficult. Many of the boxes my pupils have made were strengthened with copper bands 5/8 by 2 in., fastened around the corners at the top with copper upholstery nails.—P. S. HALLECK.

### Old Wooden Bed Is Cut Down to Make a Settee

IF YOU have an old wooden bed stored away in the attic, it probably can be made into a useful and attractive settee.

Finishing nails and about six 3-in. screws were all the additional materials needed to make the settee illustrated, and the tools required were a saw, a hammer, and a screwdriver.

The footboard was cut in half to make the ends and arms of the settee. The side rails and some of the slats were used for the seat, and the high headboard, which was to form the back, was cut down and some of the unnecessary ornamental work at the top removed, resulting in the settee shown above.—E. W.



## "The World's Best"

The best saxophones in the world are built by Conn. So say the great artists of the day—a few of whom are shown above.

PLAY A TUNE IN ONE HOUR! Exclusive features and improvements on the Conn give you quick mastery, without previous musical experience. Beautiful tone, perfect intonation. Send coupon for Free Book and details of FREE TRIAL, EASY PAYMENT PLAN.

C. G. CONN, LT D.

1132 Conn Bldg., Elkhart, Ind.



C. G. Conn, Ltd.  
1132 Conn Bldg., Elkhart, Ind.  
Please send me free book and details of Free Trial, Easy Payment plan (mention instrument.)

Name.....

St. or Rural Route.....

State, County.....

Instrument.....

# MURDOCK RADIO

WHEN men everywhere insist on Murdock apparatus; we realize that quality manufacture has imposed on us a quantity obligation, sometimes hard to meet.

Examine Murdock apparatus at your dealer's.

There are no other phones so good at so low a price. After you have bought, a 14 day trial privilege assures satisfaction with your purchase.

WM. J. MURDOCK CO.  
345 Washington Ave., Chelsea, Mass.  
1270 Broadway, New York City  
509 Mission St., San Francisco, Cal.  
No. 56—2000 Ohms.....\$5.00  
No. 56—3000 Ohms.....\$5.50



## Men Wanted to become Draftsmen

Salary \$200 to \$300 a month when competent. Chief Draftsman will train you personally until you are placed in high salaried position. The day you start I will give you absolutely FREE a draftsman's complete working outfit. Thousands of draftsmen are needed. Big pay, clean work.

Write Today! Send your name and address for my book, let "Successful Draftsmanship" it carries a vital message to you. Sent free. No obligation. Write today. CHIEF DRAFTSMAN, DOBE Dept. 1368 4001 Broadway Chicago, Illinois



## THE HOME WORKSHOP

## Discarded Picture Frames Make Attractive Serving Trays

OLD picture frames can be converted without much difficulty into substantial and attractive serving trays. In most attics there are old pictures with elaborately molded frames that have been put aside because either the picture or the frame has become old-fashioned. Often the frames are of walnut with moldings of good design, so that they will serve for making exceptionally fine serving trays.

The large serving tray illustrated, which is 14¾ by 19¾ in., was made from a frame that happened to be about the size of a regular serving tray. If the frame happens to be too large or is an odd shape, it can be cut down to the desired size and shape.

Cretonne, good reproductions of pictures that have decorative quality, Japanese prints, or commercial silhouettes, such as are sold for lampshades, can be used effectively underneath the glass. A study of commercial trays in a first class furniture store will provide suggestions for arranging these decorations. Sometimes an old, much prized pennant or a piece of embroidery or lace will prove attractive.


Brass handles, made especially for these trays, can be purchased reasonably. The bottom of the tray should be covered with felt, well glued on.

If an oval frame is available, it also may be used for a serving tray, even if quite small. Often such a tray looks better if it has wooden handles, and these too can be made at home. They should be of the same kind of wood as the frame, the handles themselves being about ¾ in. in diameter, and the rods by which they are connected with the frame ½ in. or less in diameter. Holes for these rods are drilled into the frame at an angle, and the rods are glued in place.


The first step in finishing a tray is to remove all the old finish from the frame. This can be done with a varnish remover, which will penetrate into all parts of the molding. Sandpaper the parts smooth and apply a coat of walnut, mahogany, or other stain, followed by two or three coats of shellac, rubbing down each coat a little with fine sandpaper. Then apply wax or varnish.—GLADSTONE CALIFF.

## Brush Fastened to Soldering Can

WHEN a number of parts have to be brushed with soldering fluid, it is a good idea to combine a brush with the container. This can be done by fitting a piece of tubing into the top of a can that has a screw cap, and placing the brush inside the tube. The end of the tube should be flattened slightly to hold the brush securely.—H. B.

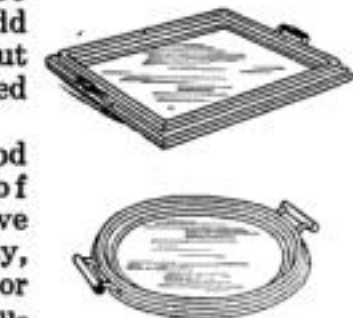

Square and oval trays

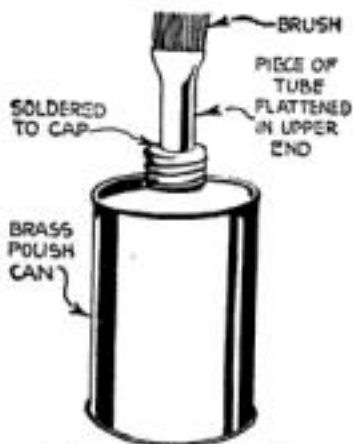

For speedy soldering

## PATENTS TRADE-MARKS AND COPYRIGHTS

## SPECIAL OFFER FREE OPINION AS TO PATENTABLE NATURE

Before disclosing an invention, the inventor should write for our blank form "Record of Invention." This should be signed and witnessed and if returned to us together with model or sketch and description of the invention, we will give our opinion as to its patentable nature.



## Our Three Books Mailed Free to Inventors

Our Illustrated Guide BOOK

## HOW TO OBTAIN A PATENT

Contains full instructions regarding U. S. Patents. Our Methods, Terms, and 100 Mechanical Movements illustrated and described, Articles on Assignment or SALE OF PATENTS, Patent Practice and Procedure, and Law Points for inventors.

## OUR TRADE MARK BOOK

Shows the value and necessity of Trade-Mark Protection and gives information regarding unfair competition.

## OUR FOREIGN BOOK

We have Direct Agencies in all Foreign Countries. Write for our illustrated Guide Book on Foreign Patents.

Send for List of Patent Buyers containing unsolicited Letters from Manufacturers and others Wishing to Buy Patents.

## SPECIALIZATION Our Staff

The field of invention is so vast that it is impossible for any one to become an expert in all the different classes of invention. Only those skilled in the class to which the invention relates are capable of rendering efficient service. For this reason Victor J. Evans & Co. employ a number of patent lawyers and mechanical experts who have been selected for their special knowledge and ability in certain lines of invention. Each case is placed in charge of experts in the classes to which the invention relates.

## THE VALUE OF YOUR PATENT

Will depend much upon the skill and care with which your case is prosecuted in the United States Patent Office. We spare neither time nor pains to secure the broadest possible patents that the inventions will warrant. That every case entrusted to us receives our best efforts, and that our work is done consistently, skillfully and thoroughly is evidenced by the many unsolicited letters of commendation that we receive constantly from our clients. We will furnish upon request lists of clients from any State in the Union for whom we have secured patents.

## Our New York, Philadelphia, Pittsburgh, Chicago, and San Francisco Offices

Owing to the growth of our business we have established for the benefit of our clients Branch Offices in New York City, Philadelphia, Pa., Pittsburg, Pa., Chicago, Ill., and San Francisco, Cal. These branch offices being located in these large commercial cities, together with our Main Office located near the U. S. Patent Office, in Washington, enables us to more promptly handle the business of our clients, particularly as the branch offices are in constant touch with the Main Office and fully equipped to handle patent business in all its branches.

## Highest References—Prompt Attention—Reasonable Terms

—FREE COUPON—



## VICTOR J. EVANS &amp; CO. Patent Attorneys

New York Offices 1007 Woolworth Bldg. Philadelphia Offices 714-715 Liberty Bldg. Pittsburgh Offices 514 Empire Bldg. Chicago Offices, 1114 Tacoma Bldg. San Francisco Offices, Hobart Bldg. Main Offices, 760 9th Street, Washington, D. C.

Gentlemen: Please send me FREE OF CHARGE your books as described above.

Name.....Address.....



# PATENTS

IF YOU HAVE AN INVENTION and DESIRE TO LEARN HOW TO

SECURE A PATENT, send for Our Guide Book, HOW TO GET A PATENT, sent free on request. Tells our Terms, Methods, etc. Send model or sketch and description of your invention and we will give our opinion as to its patentable nature.

NAME.....

STREET.....

CITY.....STATE.....

**RANDOLPH & CO.**

130 F St., N. W., Washington, D. C.

## Stop Using a Truss



Reduced Fac-Simile Gold Medal.

**STUART'S PLAPAO-PADS** are different from the truss, being medicine applicators made self-adhesive purposely to hold the distended muscles securely in place. No straps, buckles or springs attached—cannot slip, so cannot chafe or press against the punic bone. Thousands have successfully treated themselves at home without hindrance from work—most obstinate cases conquered.

Soft as velvet—easy to apply—inexpensive. Awarded Gold Medal and Grand Prix. Process of recovery is natural, so afterwards no further use for trusses. We prove it by sending Trial of Plapao absolutely FREE.

Write name on Coupon and send TODAY. **FREE** Plapao Co., 790 Stuart Bldg., St. Louis, Mo.

Name.....

Address.....

Return mail will bring Free Trial Plapao.....

## PATENTS and TRADE-MARKS

As one of the oldest patent firms in America, and representing a clientage extending to all parts of the country, we afford inventors and Manufacturers at lowest consistent charges, a service noted for efficiency and results, evidenced by many well-known Patents and Trade Marks of extraordinary value.

Lacey & Lacey, 648 F St., Washington, D.C.

ESTABLISHED 1869

Our book Patent Sense—Free

## PATENTS

Booklet Free Highest References  
Promptness Assured Best Results

Send drawing or model for preliminary examination of Patent Office records and report as to patentability.

All Business Given Prompt and Proper Attention

**WATSON E. COLEMAN, Patent Lawyer,**  
624 F St., Washington, D. C.



## PATENTS

Send us sketch or model for patentability opinion and exact cost of patent. Our book "How to Obtain a Patent" sent free on request. It tells how to apply for Patents, Trade Marks, Foreign Patents, Copyrights, etc.; gives information on Patent Procedure; tells what every inventor should know. Thousands of inventors, who are our clients, are our references.

**CHANDLEE & CHANDLEE, 25 Years' Experience**  
437 Seventh St., Washington, D. C.

## PATENTS

TRADE-MARKS COPYRIGHTS

Send for our free book of patent information

**Beale & Park** 804 F St., Washington, D. C.  
16 S. Broad St., Philadelphia, Pa.

## CAN YOU

think of a simple, practical idea that will fill one of the many requests we have on file for new inventions? It may mean a fortune for you. Thousands of things are needed RIGHT NOW. Your brains can help. Send today for our great new book—"Inventions and Trade Marks, Their Protection and Exploitation"—and learn more about making money from ideas than you ever knew before. It tells many things that are wanted, too. A postal will do—it is free.

We help our clients, without charge, to get the dollars out of their ideas—having facilities none others possess.

Advice free. Don't delay—get the book at once.

**AMERICAN INDUSTRIES, INC.**

201 Patent Dept., WASHINGTON, D. C.

**PATENTS ADVERTISED For SALE FREE In INVENTION And MANUFACTURING SUPPLEMENT.**

Published for the man with an idea. Send for free sample copy. One year's subscription 50c.

## PATENTS

### To the Man With an Idea

I offer a most comprehensive, experienced, efficient service for his prompt, legal protection and the development of his proposition.

Send sketch, or model and description, for advice as to cost, search through prior United States patents, etc. Preliminary advice gladly furnished without charge.

My experience and familiarity with various arts, frequently enable me to accurately advise clients as to probable patentability before they go to any expense.

Booklet of valuable information and form for properly disclosing your idea, free on request. Write today.

**RICHARD B. OWEN**

Patent Lawyer

6 Owen Building, Washington, D.C.  
2276-D Woolworth Building  
New York City


## THE HOME WORKSHOP

### Adapting a Farm Gate to Suit a Depressed Road

**AN ANNOYING** feature of roads under farmyard gates is that the road will wear down and soon leave a space beneath the gate through which the smaller animals will find their way.

Here is the way in which one farmer solved the problem. He hinged an auxil-

This flood type of extension to the gate adapts it to irregular ground and thus prevents farm animals from straying

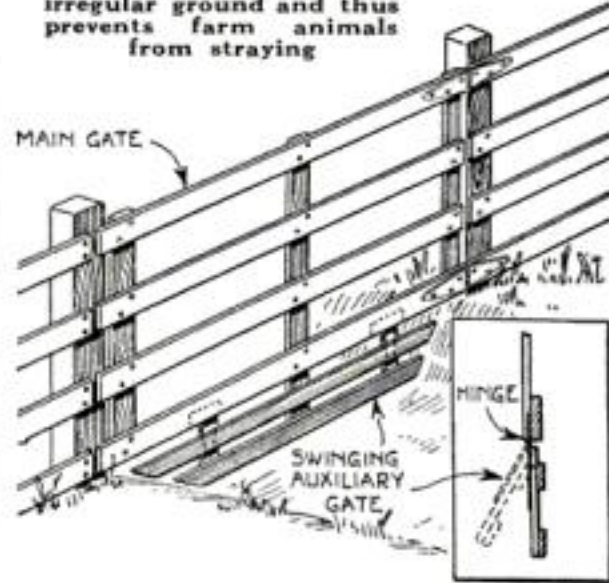


ary gate underneath the main gate in such a manner that when the gate was opened and swung back against the bank of the road, the lower gate swung up, returning to position of itself when the gate was again closed.—LOUIS SCHNEIDER.

### Spring and Tube Used to Re-Tire Baby Carriage Wheels

**WHEN** a baby-buggy tire wears out, often it is found difficult to secure and to put on a new one. The following method will be found very simple, cheap and practical, and anybody with ordinary mechanical ability can utilize it with ease.

Obtain heavy rubber tubing long enough to fit around the rim of the wheel, and steel wire spring long enough to fit the rim



A quick and durable repair

when the spring is stretched about two inches. The spring must be of such size that it can be easily pulled through the hole in the rubber tubing. The ends of the spring are fastened together. This makes a rubber tire that can be easily sprung in its place on the rim of the wheel.

It was found that heavy rubber tubing with thick walls containing some cotton, is used for gas-stove connections and can be secured at hardware stores. This tubing was made to serve the purpose and wears unusually well. The wire spring used is the ordinary screendoor or bird-cage spring. These are too short for the average size wheel and it is necessary to splice two pieces to make the proper length. The splice must be as smooth as possible, so that no free wire ends are left to puncture the rubber tube.—MRS. E. K.


IF YOUR radio set is one of several stages of amplification, try the effect of changing around the amplifying tubes. A new arrangement will sometimes make a big difference in the signals.—S. H.



## THE HOME WORKSHOP

## Razor Blade Utilized as Cabinet Scraper for Fine Work

A HANDY and useful scraper for cabinet work can be made by inserting a safety razor blade in a wooden holder, as shown. The opening in the handle, which is a piece of soft wood, is cut on a scroll-saw or in any convenient manner, and a piece is also removed from the back to allow the shavings to escape. The shape of the




handle is such that the blade stays in place while in use, yet can easily be removed. Any type of safety razor

blade will serve and one blade will last for some time before it becomes dull.

This scraper is useful on fine cabinet work where an ordinary scraper would be too large. For example, one was used in finishing the end rails of an old table. It is also valuable for smoothing inlays. In places where even this scraper is too large, a safety razor blade alone may be utilized.—G. C.

## Adjustable Socket Wrench Made with Old Bit Brace

IF YOU happen to have an old bit brace that has outlived its usefulness, you can convert it into an adjustable socket wrench. Saw off the chuck and heat and flatten the end so that you can attach to it a small

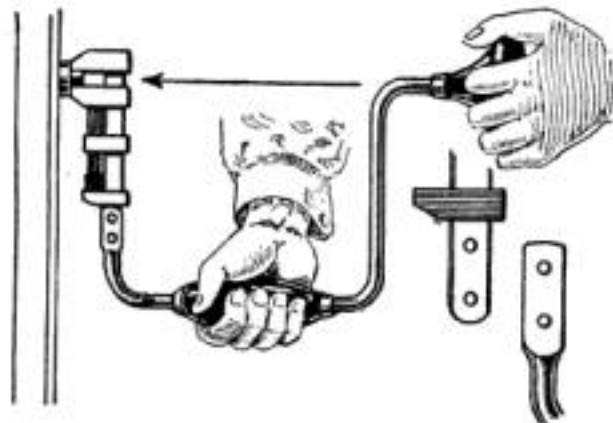


A powerful and speedy wrench for accessible work

monkey-wrench from which the handle has been removed and the shank cut down. Flatten the end of the wrench shank and place it against the flattened end of the bit brace so that the jaws of the wrench are directly under the round brace handle. In this position the two may either be riveted or bolted together.—S. W.

## Stop Holds Garage Doors Open

THE stop illustrated will eliminate the danger of garage doors being blown against the car while entering or leaving the garage. A 1/2-in. round steel rod bent into a hook at one end and sharpened to a point at the other is held in place on the inside of the doors by two staples or 1/2-in. pipe cleats. A heavy nail or hook is driven into the door to provide a hanger for the stop rod when the doors are being opened or closed.—ALEXANDER GRABAU.

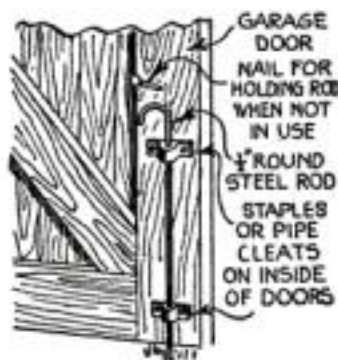

# W. L. DOUGLAS

## \$5.00 \$6.00 \$7.00 & \$8.00 SHOES FOR MEN AND WOMEN



W. L. Douglas \$7.00 and \$8.00 shoes are absolutely the best shoe values for the money in this country.

**WEAR W. L. DOUGLAS SHOES AND SAVE MONEY.**

W. L. Douglas \$4.00 and \$4.50 shoes for boys, best in quality, best in style, best all around shoes for boys.

All W. L. Douglas shoes are made of the best and finest leathers, by skilled shoemakers, all working to make the best shoes for the price that money can buy. The quality is unsurpassed. The smart styles are the leaders in the fashion centers of America. Only by examining them can you appreciate their wonderful value. Shoes of equal quality cannot be bought elsewhere at anywhere near our prices.

W. L. Douglas shoes are put into all of our 110 stores at factory cost. We do not make one cent of profit until the shoes are sold to you.

It is worth dollars for you to remember that when you buy shoes at our stores **YOU PAY ONLY ONE PROFIT.**

No matter where you live, shoe dealers can supply you with W. L. Douglas shoes. They cost no more in San Francisco than they do in New York. Insist upon having W. L. Douglas shoes with the name and retail price stamped on the sole. Do not take a substitute and pay extra profits. Order direct from the factory and save money.

Write for Catalog Today  
Pres. W. L. Douglas Shoe Co.,  
124 Spark St., Brockton, Mass.

**Quick action!**

So often, where a liniment is required, there is need for an antiseptic. And where an antiseptic is required, there is often need for a germicide. Have all three in one container. \$1.25 at drug-gists or postpaid. Liberal trial bottle, postpaid, 10c.

W. F. YOUNG, Inc.,  
150 Temple Street  
Springfield, Mass.

**Absorbine Jr.**  
THE ANTISEPTIC LINIMENT

**My new plan brings this man**

**\$1076 an hour!**



L. G. Sprindler of Akron, Ohio, made \$10.76 an hour the first time out! Almost took him off his feet! My men and women are cleaning up all over! Gust Belgay made \$52.00 in one day! E. T. Oliver sold \$30 in two hours. W. E. Gibson took 69 orders in 2 days. W. H. Marion got 36 orders from 40 calls. Why? The merchandise. It sells itself and you make over 100 per cent profit.

### An Amazing Opportunity

I will positively show you the biggest selling profits and opportunities that any manufacturer has been able to offer you. No training. No experience. The quality holds your customers, thus you are building a permanent, sound business that will keep you financially independent.

### Just Send Me Your Name

Just write me at once for full details of my proposition. There is no obligation—and it will mean real money for you. It's an honest to goodness opportunity! Write me this minute while you think of it. You'll never regret it.

**E. M. DAVIS, Dept. 5797 Chicago**

**E. M. Davis, Dept. 5797 Chicago**

Please send me full particulars of your new sales plan—and proof that there's big money in it.

Name .....

St. No. ....

Town ..... State .....

## LAUGH AT THE WEATHER

with  
**"Wear Me"**  
Windshield Wings

10" x 20" Pevelled Plate Glass. Clamped Not Bolted. Hardware Strong and Rustproof. No interference with Side Curtains. Fully Guaranteed.

**\$12.50**

Per Set  
Ford Special \$10.00 Per Set

"The Kind you Have Been Waiting For"

Order from your dealer or direct

WEAR ME AUTO SPECIALTIES  
"Wear Me" Auto Specialties  
PITTSBURGH PA.

## U.S. PATENTS



### DON'T LOSE YOUR RIGHTS TO PATENT PROTECTION

Before disclosing your invention to anyone send for blank form "EVIDENCE OF CONCEPTION" to be signed and witnessed. A sample form together with printed instructions will show you just how to work up your evidence and establish the same before filing application for patent. As registered patent attorneys we represent hundreds of inventors all over the United States and Canada in the advancement of inventions. Our schedule of fees will be found reasonable. The form "Evidence of Conception," sample, instructions relating to obtaining of patents and schedule of fees sent upon request. Ask for them,—a post card will do.

PATENTS AND TRADE MARKS  
**LANCASTER & ALLWINE**

274 Ouray Bldg.

WASHINGTON, D. C.

Originators of forms "Evidence of Conception."





**ADD FROM \$600  
TO \$5000 A YEAR  
TO YOUR  
PROFITS!**

**WHY** worry about lessened profits from your store? Here's an easy way to increase your profits every month in the year!

Place a Butter-Kist Popcorn and Peanut Machine in your store in unoccupied space—sell these tasty treats to every customer. And the space required? That's easy! Any store has enough space because the machine takes up little room.

And the profits? Out of every dollar's worth of Butter-Kist Popcorn you sell, 70 cents is yours to keep!

It's so easy to make steady customers because everybody likes the delicious taste of Butter-Kist products. People will come back to you again and again for more. That's why you can sell dollar after dollar's worth, day in and day out. Just remember, Popcorn and Peanuts are big sellers everywhere.

Steady streams of customers every day tell why merchants all over America are averaging from \$600 to \$5000 every year with Butter-Kist Popcorn Machines. If others can do this—so can you.

### BUTTER-KIST Popcorn "America's Oldest Treat"

Before you turn this page, write for our "Location Chart" that will tell you approximately how much profit you can make the Butter-Kist Way in your location. Fill in and mail the coupon. It may solve your problem of how to increase your profits. Send the coupon today.

**HOLCOMB & HOKE MFG. CO.**  
World's Largest Manufacturers of Popcorn  
Machines and Peanut Toasters  
2126 Van Buren St. Indianapolis

HOLCOMB & HOKE MFG. CO.,  
2126 Van Buren St., Indianapolis, Ind.

Please send me, without obligation on my part, your free Butter-Kist book, "America's New Industry." I also want the Location Chart which I will fill out and return to you.

Name \_\_\_\_\_  
Address \_\_\_\_\_  
City and State \_\_\_\_\_  
Business \_\_\_\_\_


**BUTTER-KIST**  
Popcorn and Peanut Machines

### THE HOME WORKSHOP

#### Homemade Combination Locks Small Desk or Wall Safe

**THIS** simple combination lock is one I made for a small wall safe for the safe keeping of stamps, coins and jewelry, although obviously it could be used for other purposes.

The lock proper consists of only three parts, A, B, and C. Part B fits over C and A fits on top of B. Part B must turn freely

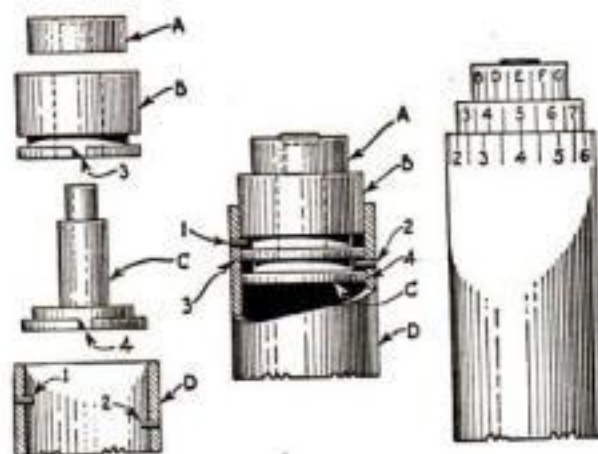

When the slots are correctly aligned, the door opens


after A is riveted to C. The slots 3 and 4 must be in line with the pins 1 and 2 before the lock can be opened.

After placing the slots in correct alignment, pull on the lock until pin 1 enters the groove occupied by pin 2. Then turn C until slot 4 comes in line with pin 1. The lock will then pull out. It is necessary to mark off dials as shown on all the three parts.—JOHN AURES.

#### Clothes Horse Quickly Made

**MANY** are the days that washings cannot be hung out of doors, yet the drying of clothes indoors is always a problem. Some use lines, some driers that can be bought; we have tried both, but my wife likes this homemade clothes horse best of all. It takes up little room when not in use and yet holds a number of clothes.

White pine, cypress, or any light wood that does not warp easily, can be used. For the central post one piece 2 by 2 in. by

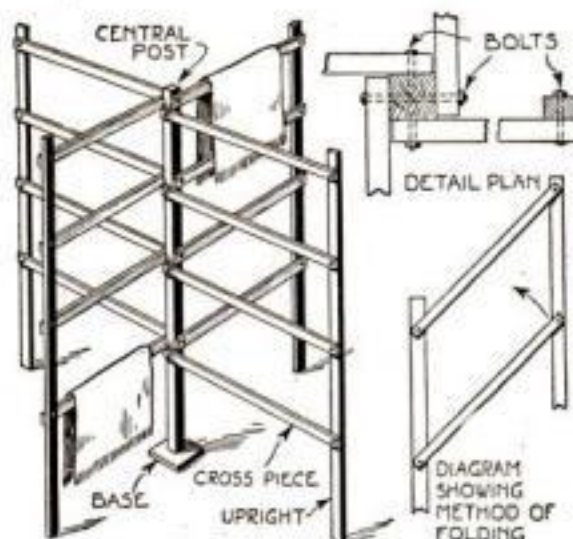

Folds up compactly when not in use

6 ft. is required; for the four other uprights, 1 by 1 1/2 in. by 6 ft. pieces. Sixteen 3/4 in. by 1 in. by 28 in. rods are needed for cross pieces and one 1/8 by 8 by 8 in. for the base. To fasten the parts together use 16 bolts 1/4 in. by 2 1/4 in. and 8 bolts 1/4 in. by 4 1/2 in.

The wood should be sandpapered so there will be no rough places. It can be white enameled or left without finish.—K. W. F.

## "Lighting Fixtures"



Ready to hang.  
Direct from manufacturers.  
Completely wired including glass-ware.

Send for Catalogue No. 24  
and Dealers' proposition

**ERIE FIXTURE SUPPLY CO.**  
Desk A, Erie, Pa.

## This Wonderful Invention



converts any ordinary cook stove into a gas stove. OXO-GAS made from common kerosene and air (mostly air). Cheaper, cleaner and more efficient than coal. OXO-GAS appliances for every purpose. We have openings for responsible, energetic men as distributors. Only those who can properly finance themselves considered.

**GLORIA LIGHT COMPANY**  
108 N. May St., Chicago, Ill.

## Don't Wear a Truss



MR. C. E. BROOKS

**BE COMFORTABLE**—Wear the Brooks Appliance, the modern scientific invention which gives rupture sufferers immediate relief. It has no obnoxious springs or pads. Automatic Air Cushions bind and draw together the broken parts. No salves or plasters. Durable. Cheap. Sent on trial to prove its worth. Never on sale in stores as every Appliance is made to order, the proper size and shape of Air Cushion depending on the nature of each case. Beware of imitations. Look for trade-mark bearing portrait and signature of C. E. Brooks which appears on every Appliance. None other genuine. Full information and booklet sent free in plain, sealed envelope.

**BROOKS APPLIANCE CO., 255 F. State St., Marshall, Mich.**

## AGENTS: \$6 PER DAY AND UP

Selling concentrated, non-alcoholic food flavors. Always fresh. Put up in collapsible tubes. Ten times the strength of bottled flavors. Guaranteed under U. S. pure food laws. All flavors. Sells in every home. Used every day. Not sold in stores. Big demand. Big repetition. 100% profit.

**Men or Women**  
can make big money. Just sold over \$300 in one month. You will find this a big, easy seller and a sure reposter. Must satisfy customers or money back. Write for territory and sample outfit. Get a big line of customers. Get repeat orders every month and have a steady income. Write quick.

**American Products Co.**  
7237 American Bldg., Cincinnati, O.



ACT QUICK WRITE TO-DAY

## BOYS! BOYS! BOYS! THROW YOUR VOICE



Into a trunk, under the bed or anywhere. Lots of fun fooling the Teacher, Policeman or Friends.  
**THE VENTRILO,**  
a little instrument, fits in the mouth out of sight, used with above for Bird Calls, etc. Anyone can use it. NEVER FAILS. Also a 32 PAGE BOOK which gives full instructions on Ventriloquism. Formulas for Secret Writing (Invisible Ink), 14 Money Making Secrets and 10 BIG TRICKS ON MAGIC all for 10¢.  
**ROY. NOV. CO., Dept. 702 So. Norwalk, Conn.**  
LARGEST and OLDEST Mail Order House in Connecticut.

#### Electric Bells

A complete treatise for the practical worker in installing, operating and testing bell circuits, burglar alarms, thermostats and other apparatus used with electric bells. The detailed instructions for building the apparatus will appeal to the experimenter particularly.

124 pp. Fully illustrated Price, 75 cents  
**POPULAR SCIENCE MONTHLY**  
225 West 39th Street New York City, N. Y.




## THE HOME WORKSHOP

## Ford Axle Housing Forms a Cheap Portable Forge

ONE half of an old Ford axle housing, which can be obtained at little cost from an automobile junk dealer, can be used for building a small portable forge that will serve many uses in the home workshop, garage, or small machine shop.

The housing is cut off so as not to be of unwieldy length, and fire clay and tin are used to stop up the ends. Air is supplied through a length of  $\frac{1}{2}$ -in. pipe, to receive which the housing is tapped. The bellshaped firebox of the forge is provided with a circular iron bottom, in which is drilled a  $\frac{3}{16}$ -in. hole to admit the air.—G. F.

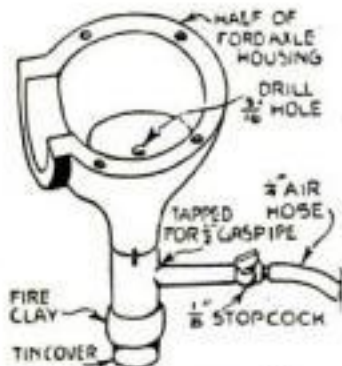

For the home smithy

## Sharpening Shears with a Needle

THE sharpener for shears illustrated below was made with nothing more than a small piece of sheet copper, a darning needle, some thread, and a drop of shellac.


The copper,  $\frac{3}{4}$  by  $2\frac{3}{4}$  in., was bent up  $\frac{1}{2}$  in. from one end. The thread was wrapped around the middle of the needle, which was placed in the bend and fastened with a touch of shellac.

The copper was then bent entirely over and clamped tightly with pliers. The extreme point of the needle was ground or broken off to prevent pricking the hand or fingers.

To use, place either end of the needle between the cutting edges of the shears and close the shears, allowing the needle to slide smoothly between the edges. Repeat the operation several times until a good edge is obtained.—JOHN A. GESSLER.

## Screw-Eyes as Shelf Supports in Music Cabinet

ONE of my students who was making a music cabinet found that none of the local hardware stores had regular shelf supports in stock. I therefore suggested putting in the three shelves with screw-eyes. Three were placed on each side of each shelf. Since the shelves were extra wide and gave signs of warping, a screw was screwed through each screw-eye into the under side of the shelf. These substitute supports cost little, served the purpose well, and looked neat.—G. C.

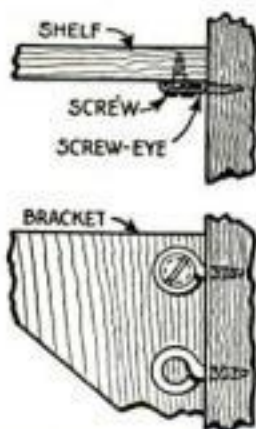

Supports as seen from front and bottom of the cabinet shelves

# A Knockout!

## BOXING Jiu-Jitsu Wrestling

~~\$5.00~~  
**\$2.97**

85 lessons —over 200 illustrations

Here it is—the famous Marshall Stillman Course in Boxing, Jiu-jitsu and wrestling, now at the extraordinary price of \$2.97 instead of \$5.00!—85 lessons, 381 pages, 246 illustrations!

Sooner or later you'll have to "whip your man." It may come tomorrow. A bully insults you, your sweetheart or mother. Do you swallow the insult? No, you fight, but unless you know more about boxing and self-defense than your opponent, you're the one who's going to get licked.

You're not playing fair with those who love and depend upon you unless you prepare yourself. And think of the sport you're missing. There's barrels of fun in friendly boxing bouts and wrestling matches. You may even box rings around that "chap who thinks he knows it all" or pin his shoulders to the mat.

Marshall Stillman teaches you the game right in your own home from the simplest rudiments of hitting and guarding to the most scientific blows and guards such as the Benny Leonard Triple, the Jack Dempsey Triple, the Fitzsimmons Shift, etc. So quickly do pupils learn that many outbox bigger opponents after only two weeks' training.

In wrestling you learn 15 Jiu-jitsu holds—how to

disarm an opponent, how to break a strangle hold, etc.—and 14 of the best mat holds—the Gotch Toe Hold, the Stecher Scissor Hold, the Head-lock, etc.

With the course you get a Free History of 69 Famous Boxers, with their pictures and "inside" stories about them. **SEND NO MONEY:** Simply fill in and mail the coupon. When you have the course in your hands, merely deposit 97 cents with the postman. Then examine the course for 10 days—try it out thoroughly. At the end of 10 days either send us the small balance of \$2 in final payment, or return the course, and we'll send your deposit back. Mail the coupon to Marshall Stillman Association, Dept. 1122-K, 42nd St. and Madison Ave., New York.

## COUPON

Marshall Stillman Association

Dept. 1122-K, 42nd St. and Madison Ave., New York

You may send me on approval the Marshall Stillman Course. I will deposit 97c with the postman, with the understanding that if, after 10 days, I wish to return the course I may do so and my money will be refunded. If I keep the course I am simply to send you two dollars in final payment.

Name.....

Address.....

## FREE Radio Catalog



Describes and illustrates our large complete stock of Radio Equipment of all kinds. We can make immediate shipments of proven, reliable equipment. Protect yourself against disappointment by taking advantage of our experience and reliability.

Send \$5.00 For Genuine Cunningham or Radiotron Detector Tube.

Free catalog sent on request.

JULIUS ANDRAE & SONS CO.

In business since 1880

119 Michigan Street - Milwaukee, Wis.

## TYPEWRITERS

17c a Day soon pays for a genuine visible Underwood or L. C. Smith rebuilt Typewriter. Save \$20 to \$30 on famous Larkin Easy-Payment plan. Handsomely finished. 5 Year Guarantee. 30 Days Trial. Send for FREE Book TODAY.

Larkin Co. Inc. Desk TFSM-1122

Buffalo, N. Y. Peoria and Chicago, Ill.



## Be an "OLD MASTER" Salesman—Earn \$50.00 to \$150.00 Weekly

Opportunity all around you. Wonderful new discovery that every man with ambition can sell to all auto, truck and vehicle owners. No experience necessary. We will show you how.

## "OLD MASTER" Auto Enamel

The new scientific discovery that the creators spent many years to perfect and put on the market. Men of all ages and business are becoming independent by "OLD MASTER" methods, which we guarantee will make big money for you.

## Dries in Twenty-four Hours

That is the great appeal which makes every car owner want to buy "OLD MASTER." Positively a quick seller. Can be put on quickly by anyone. Gives new car results. Users swear by it, because it lines up to advertising. Men selling "OLD MASTER" would not change back to old work for any consideration.

You can join the salesmen now. Territory ready. Be local salesman or distributor. Paint cars yourself. The opportunity is big.

Write immediately for E. A. Zeisloft's easy plan on how to gain success.

Exclusive agency open for man who desires \$50.00 to \$150.00 weekly. Big nation-wide campaign just starting. Wide-awake men are making big money selling wonderful auto enamel recently perfected after years of study. Dries in twenty-four hours. Anyone can use it. Spreads evenly and quickly. Motorists, garages, auto dealers want it on sight. Made in big exclusive paint and varnish plant. Formula from "OLD MASTER" auto painter. Took years to perfect.

Write at once. Apply for territory.

Going fast. Address

AKRON PAINT PRODUCTS CO.

Akron, Ohio

## Build Your Own RADIO

### BUT—Build it right!

Following our complete and simple instructions, diagrams and photographs, even the inexperienced are building perfect sets.

at

A Saving of 72%

FREE Descriptive Circular mailed upon request without obligation—Send for it today

GERSCH & MARSHALL  
Radio Company

Radio Engineering  
65 Board of Trade - Chicago, Illinois





## Are Your Hands Tied?

Are your hands tied by a lack of training? Are you bound down to a routine job because you have never learned to do any one thing well?

Don't give up! There is an easy, fascinating way for you to prepare yourself for a better job and a bigger salary. You can do it right at home in the spare time that now goes to waste.

No matter where you live, the International Correspondence Schools will come to you. No matter what your handicaps, or how small your means, we have a plan to meet your circumstances.

Don't let another priceless hour of spare time go to waste. Without cost or obligation, let us prove that we can help you to get a better job and a bigger salary. Mark and mail this coupon.

### INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7611-C, Scranton, Penna.  
Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

#### BUSINESS TRAINING DEPARTMENT

- |   |   |
|---|---|
| <input type="checkbox"/> Business Management            | <input type="checkbox"/> Salesmanship           |
| <input type="checkbox"/> Industrial Management          | <input type="checkbox"/> Advertising            |
| <input type="checkbox"/> Personnel Organization         | <input type="checkbox"/> Better Letters         |
| <input type="checkbox"/> Traffic Management             | <input type="checkbox"/> Foreign Trade          |
| <input type="checkbox"/> Business Law                   | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law        | <input type="checkbox"/> Business English       |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service          |
| <input type="checkbox"/> Nicholson Cost Accounting      | <input type="checkbox"/> Railway Mail Clerk     |
| <input type="checkbox"/> Bookkeeping                    | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary              | <input type="checkbox"/> High School Subjects   |
| <input type="checkbox"/> Business Spanish               | <input type="checkbox"/> Illustrating           |
| <input type="checkbox"/> French                         |   |

#### TECHNICAL AND INDUSTRIAL DEPARTMENT

- |   |  |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect               |
| <input type="checkbox"/> Electric Lighting      | <input type="checkbox"/> Blue Print Reading      |
| <input type="checkbox"/> Mechanical Engineer    | <input type="checkbox"/> Contractor and Builder  |
| <input type="checkbox"/> Mechanical Draftsman   | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice  | <input type="checkbox"/> Concrete Builder        |
| <input type="checkbox"/> Railroad Positions     | <input type="checkbox"/> Structural Engineer     |
| <input type="checkbox"/> Gas Engine Operating   | <input type="checkbox"/> Chemistry               |
| <input type="checkbox"/> Civil Engineer         | <input type="checkbox"/> Pharmacy                |
| <input type="checkbox"/> Surveying and Mapping  | <input type="checkbox"/> Automobile Work         |
| <input type="checkbox"/> Metallurgy             | <input type="checkbox"/> Airplane Engines        |
| <input type="checkbox"/> Steam Engineering      | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Radio                  | <input type="checkbox"/> Mathematics             |

Name.....

Street Address.....

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

## WORKO Radio Cabinets

Build your own receiving set. Worko Cabinets are solid Mahogany. Fronts rabbeted. Tops hinged. Beautiful brown finish—hand rubbed. Order today for quick delivery. Check or M. O. Prepaid East of Rockies.



Panel Size	Inside Dimensions	Price Ex.
6x7"	5 1/2" high 6 1/2" wide 7" dp	\$2.40
6x10 1/2"	5 1/2" " 10" " 7" "	2.65
6x14"	5 1/2" " 13 1/2" " 7" "	3.10
6x21"	5 1/2" " 20 1/2" " 7" "	3.95


Worko Co., Mfrs., Racine, Wis., Dept. C.

### THE HOME WORKSHOP

## Hot-Air Propeller Operates Novel Pecking Bird

THE mechanism of this little novelty consists of two parts, a pecking bird and a propeller driven by hot air from any radiator or stove.

The base is 1/4 in. thick and 6 in. square, with a round hole in the center 4 in. in diameter. The bird is cut from a printed picture and mounted on cardboard, or is drawn directly on cardboard. It should have three separate parts, body, neck, and tail. The body is mounted on a stationary piece of wood, while the tail and the neck are fastened to the body with string or wire. A little above both points of attachment a thread is fastened so that the head and the

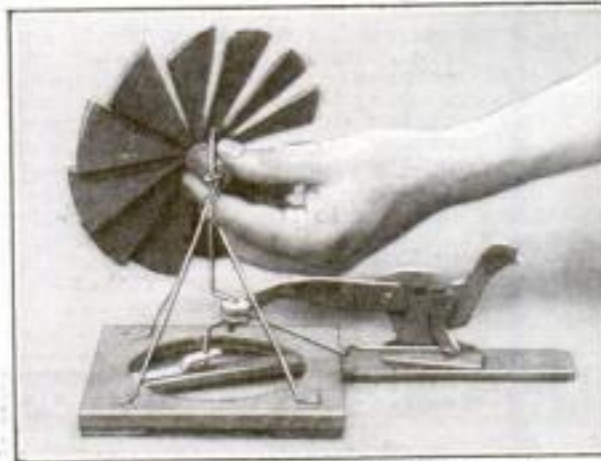

When the wheel turns, the bird pecks

tail are held in their normal positions. The neck part must be cut so that it extends towards the base or a separate arm attached to it to provide a long leverage.

Over the round hole a three-legged wire support is made for the wheelshaft, which is a stout piece of wire 6 in. long. Near the bottom a U-shaped bend is formed, and the top is flattened.

Place the shaft through the loop of the tripod support, hold it vertically, and attach a thin piece of wood over the round hole, directly below the shaft. A small step bearing should then be provided as shown.

Cut off two pieces of wire about 2 in. long, form a loop at each end, and fasten them together. One end is placed in the U-shaped bend, between two thin corks; the other end is attached to the long lever-like arm on the neck of the bird. When the shaft is turned, the bird will bob its head as if it were eating, and whenever the head goes down the tail goes up.

The wheel is made from thin tin, 6 in. in diameter, attached to the top of the wire shaft by means of a cork.—F. H. L.

### Uses for Shotgun Shells

EMPTY shotgun shells should not be thrown away, because they are most useful as containers for small articles. They can be corked like bottles and stored away compactly in drawers or boxes.

The home worker can arrange a rack for the shells in which to keep small screws, drills, taps, and reamers. The sportsman can use the shells to hold hooks, splitshot, sinkers, and other small items of equipment. The autoist can carry them in the side pocket of his car to keep fuses, contact points, springs, cotters, and lock washers separated and properly labeled for immediate use. An emergency sewing kit can be made by wrapping a liberal supply of thread around a shell and placing inside it a few buttons, needles and pins.—J. V. R.

### The COAL shortage is your opportunity



Put yourself over

## with the CROWN Fuel Saver

This timely utility meets the public demand for fuel saving in present coal shortage. Get on a solid financial footing. Become distributor for CROWN Fuel Saver. Establish a big profit, permanent business.

The CROWN sells readily because it saves at least 1/5 the fuel. Distributors thoroughly trained without cost, and backed by business getting advertising in local paper.

Write or wire for exclusive distributor proposition. Profits are big and generous to workers with sales ability.

CFSCO 12 N. 10th St., Richmond, Indiana

### RADIO & AUTO Storage Batteries CHARGED FROM A LAMP SOCKET, for Few Cents with an F-F BATTERY BOOSTER

which is a Full Wave Magnetic Rectifier, for 105-125 Volt 60 Cycle A. C. Is it not gratifying to be Always Ready for Radiophone Broadcast Music? **F-F BATTERY BOOSTERS** are Complete Compact Convenient Portable. Automatic Charging Units. Infinite Carbon Rectifying Brushes Maintain Uninterrupted Service at Constant Efficiency, while Full Wave Design Delivers Rapid Taper Charge. Screw Plug in Lamp Socket; Snap CLIPS on Battery Terminals & Battery will be Charged in Morning. No Skill is Required. **F-F BATTERY BOOSTERS** Save You Money. Last Lifetime. Popular PRICES: Type 6 charges 6 Volt Battery at 6 cents \$15; Type 8 charges 8 Volt Battery up to 120 Volts \$15; Type 12 charges 12 Volt Battery at 12 cents \$29; Type 16 charges 16 Volt Battery at 16 cents \$34; Type 20 charges 20 Volt Battery at 20 cents \$39; Type 24 charges 24 Volt Battery at 24 cents \$44; Type 30 charges 30 Volt Battery at 30 cents \$54. Large Types are for heavy Radios, or where time is limited. Shipping Weights Complete with **AMMETER & BATTERY CLIPS** 11 to 35 lbs. Purchase from Your Dealer, or Mail Check for Prompt Shipment. Or if for Parcel Post, add Postage & Insurance Charges. Or Order Type desired Shipper C.O.D. **ORDER NOW or WRITE Immediately for FREE BOOSTER Bulletin 17.** **THE FRANCE MFG. CO., CLEVELAND, OHIO, U. S. A.** Canadian Reps: Battery Service & Sales Co., Hamilton, Ontario, Canada

## "DON'T SHOUT"

"I hear you. I can hear now as well as anybody. 'How?' WITH THE MORLEY PHONE. I've a pair in my ears now, but they are invisible. I would not know I had them in, myself, only that I hear all right." The Morley Phone for the **DEAF** is to the ears what glasses are to the eyes. Invisible, comfortable, weightless and harmless.

Anyone can adjust it. Over one hundred thousand sold. Write for booklet and testimonials. **THE MORLEY CO., Dept. 797, 28 South 15th Street, Philadelphia.**

## BIG VALUE for 10 Cts.

6 Songs, words and music; 25 Pictures Pretty Girls; 40 Ways to Make Money; 1 Joke Book; 1 Book on Love; 1 Magic Book; 1 Book Letter Writing; 1 Dream Book and Fortune Teller; 1 Cook Book; 1 Base Ball Book, gives rules for games; 1 Toy Maker Book; Language of Flowers; 1 Morse Telegraph Alphabet; 12 Chemical Experiments; Magic Age Table; Great North Pole Game; 100 Conundrums; 3 Puzzles; 12 Games; 30 Verses for Autograph Albums. All the above by mail for 10 cts. and 3 cts. postage. **ROYAL SALES CO., Desk 604, South Norwalk, Conn.**

## CLASS PINS

FREE CATALOG. Give name of school or club and number in class. Either pin illustrated made with any 3 letters and 2 figures, one or two colors enamel. Silver plate, 20¢ ea., \$2.00 doz. Sterling silver, 40¢ ea., \$4.00 doz. Write for catalog of sterling and solid gold pins and rings. **Bastian Bros. Co. 450 Bastian Bldg., Rochester, N.Y.**


**Agents** LARGE MANUFACTURER OF SHIRTS wants Agents to sell complete line of shirts direct to wearer. Exclusive patterns. Big values. No capital or experience required. Write for free samples. **MADISON SHIRT MILLS 507 Broadway, New York, N.Y.**



## THE HOME WORKSHOP

## A Barrel Form Used in Making a Concrete Cesspool

A CESSPOOL for sewage disposal may be built with little more than two bags of cement and a large wooden barrel. A hole about 6 ft. deep is dug in the ground and then filled in loosely with rock and brick for a depth of 2 ft. The barrel is cut out at the place where the drain is to enter and is placed in an inverted position on the loose rock. A mixture of cement and sand

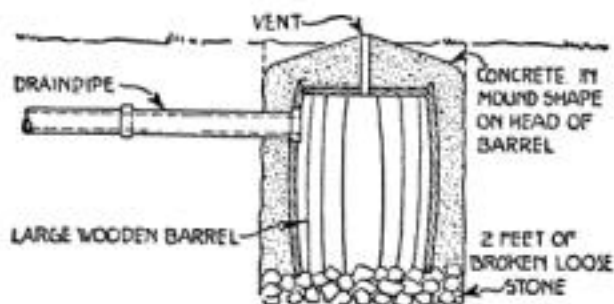

The barrel is set on broken stone foundation and concrete poured around it


is then poured between the barrel and the surrounding wall of earth.

At the top of the barrel a 2-in. hole is fitted with a tin tube before the cement mixture is built up in mound shape over the barrel. This vent prevents any accumulation of gas from backing up the pipe. Eventually the barrel will rot away but the concrete walls will remain permanently.—G. A. LUERS.

## Tray for Sorting Small Parts

THIS tray will save much time in sorting the usual miscellaneous lot of nuts, bolts, screws, washers, and other small parts and fittings kept together in boxes or tins in the home workshop.

Place the sliding plate under the hole, dump the "junk" into the tray, spread out

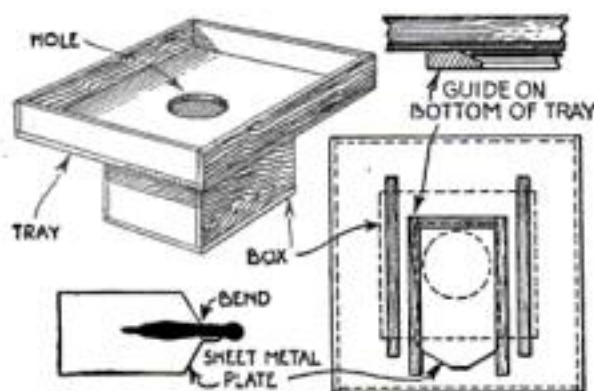

This device makes it easy to find the right nut, screw, and washer without any delay

the parts, and you will be able to find what you are looking for in no time.

To put everything into the box again, set the tray on top of the box, pull out the plate and use it to scrape the scattered parts through the hole.—D. W. CLARK.

## "Shielding" Your Radio Set

SOMETIMES when adjusting the knobs and dials of sensitive, closely regulated outfits the signals will die down as soon as the hand is removed. This is due to the capacity effect of the body. To get around it, cover the back side of the panel with tin foil or sheet copper, using care to see that the metal does not touch contacts, rods or wires. This is called a shield. At the point nearest the ground, connect the shield with the ground.—W. J. T.

## "Radio—the New Field of Unlimited Opportunity."

Today the Radio industry is surpassing all records in its rapid growth and development, yet those who are closely connected with the leading radio companies of the world say that this new art—**RADIO**—is yet in its infancy.

Think what wonderful opportunities there are for those who are qualified to enter this interesting scientific field. Why not identify yourself with a future that is as unlimited in its possibilities as is the mind of man.

Prepare yourself for a future in the Radio field through the **Home Study Course of the Radio Institute of America**—(the oldest and best equipped radio school in the United States)—over 6500 graduates, 95% of whom have secured well paying positions in this new branch of science.

The Home Study Course is prepared for those who cannot attend the Institute personally and exactly

parallels the residence course. The same text books are used and the Institute staff of instructors prepare and examine your home studies in a systematically organized course of instruction.

**A THREE-WEEKS' POST-GRADUATE COURSE, IN OUR NEW YORK CITY INSTITUTE IS GIVEN FREE TO ALL STUDENTS OF THE HOME STUDY COURSE DESIRING IT.**

The graduates of the Radio Institute enjoy a great and exclusive advantage in the close connection existing between the Institute and the Radio Corporation of America, the world's largest Radio Manufacturing and Commercial Radio Company.

Write for our booklet, "**Radio—the new field of Unlimited Opportunity.**"

## Radio Institute of America

328 Broadway

(FORMERLY MARCONI INSTITUTE)

New York City

Branch Residence School

New Call Building, New Montgomery Street, SAN FRANCISCO, CALIF.



## Bringing Home the "Bacon"

SWIFTLY, economically, comfortably, a Harley-Davidson speeds you and your pal *anywhere*—far from the humdrum of the city, to hidden haunts where the sport hasn't been spoiled by the crowds.

Harley-Davidson  
World's Champion Motorcycle


Ten Improvements for 1923, including new brakes and a roller-bearing hub, firmly establish the Harley-Davidson as the standard of motorcycle value.

Reduced prices on 1923 models! Only \$285 for the famous Twin, the luxurious speed-mount that travels 50 miles on a dollar's worth of "gas", oil and tires!

See your dealer for demonstration. Write us for new illustrated literature.

Harley-Davidson Motor Co.,  
Milwaukee, Wisconsin.

Attractive dealer's proposition for unassigned territories. Address Desk A-2.

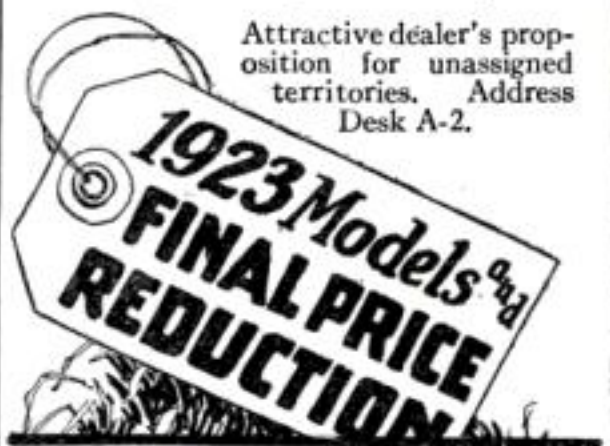RADIO FANS  
LISTEN IN ON THIS  
IMPORTANT NEWS!

**AUTOMATIC  
ELECTRIC  
LONG RANGE  
RADIO  
HEAD SETS**



Are now  
perfected and  
being distrib-  
uted every-

where to amateurs and professionals. There is no distortion or metallic sound whether you use crystal set, amplifier or loud speaker. The Automatic Electric HEAD SET positively assures the best results.

The Automatic Electric long-range HEAD SET is the tested product of telephone experts or over thirty years' experience.

Dealers in Standard Radio Equipment sell Automatic Electric HEAD SETS. Ask your dealer first. If he cannot supply you with the genuine, send your order direct.

Sent postpaid to any address in the U. S. for **\$10.00**

With Plug attached, \$11.50.  
Jobbers and Dealers—  
Write today for discounts and full particulars about our Jobber-dealer plan.

Automatic Electric  
Company

Engineers, Designers and Manufacturers  
of the Automatic Telephone in  
Use the World Over.

HOME OFFICE AND FACTORY: CHICAGO, U. S. A.





## Marvelous Music of the Air

Beautiful concerts, instructive lectures, entertaining stories, the days' news—all this comes at your bidding to your home through the medium of the world's most thrilling scientific achievement—RADIO.

To get the best results in listening to wireless entertainment, use the

### STROMBERG-CARLSON Radio Head Set

Price \$7.50

The perfected product of 28 years devoted to manufacturing voice reproduction apparatus. These Head Sets are unexcelled in tonal quality; are extremely sensitive to long distance signals. They are designed with a view to greatest comfort and adjustability; have a forked cord which permits two observers to "listen in" simultaneously with one Head Set.

We make other radio parts for high efficiency in commercial and amateur service: Stromberg-Carlson Universal Plug fits any standard jack, takes any type or size of conductor. Stromberg-Carlson Radio Jack adapted to all standard Radio Plugs.

You may order Stromberg-Carlson apparatus from your electrical merchandise dealer, or a postal will bring you free Bulletin No. 1029-P. S., which fully describes the exclusive Stromberg-Carlson features.



**STROMBERG-CARLSON**  
Telephone Manufacturing Company  
Rochester, N. Y.    Kansas City  
Chicago    Toronto  
Address Nearest Office

## THE HOME WORKSHOP

### How to Make Permanent Baskets of Sea Moss

**D**AINTY basket plants resembling fluffy tropical vegetation may be made by placing "sea moss" in a large snail shell. This so-called sea moss is not related to the vegetable kingdom, but is a colony of animals, the hydroid polyps, scientifically known as *Hydroidea*. These usually are tiny creatures which, through budding, have developed numerous branches, and, according to their species, they produce tiny tree-shaped, bush-shaped, or delicate mosslike structures.

All of the animals in the colony are connected with each other by means of a canal. In this way the food that one polyp may catch is distributed through the colony. The outer surfaces of these tiny animals excrete a chitinlike substance that often completely surrounds the stem and branches.

*Sertularia argentea*, which is the polyp used for the "plant" in the hanging garden, occurs in large stocks producing many-branched feathery projections on which the individual, sessile animals are found. These bunches form thick clusters on the shallower places along the beaches and can be found at almost any season of the year. All that need be done is to color them slightly and place them in some suitable container. These "plants" require absolutely no care whatever; when once suspended they will keep "fresh" for years.—E. B.



One of many basket shapes

### Old Vacuum Cleaner Serves as Suction Fan for Small Shop

**A** SUCTION fan, for use in connection with a grinder and buffer, may be constructed from an old vacuum cleaner. One of these may be obtained usually from any firm dealing in vacuum cleaners, since they take old ones in part payment for new cleaners and, as the old ones are antiquated and of little value for the work they were intended to do, they often can be had for \$10 or \$12, which is about the value of the small second-hand motor they contain.



Applied to emery wheel

They can be applied to the grinder or buffer by making a suitable hood of galvanized iron and connecting it with the vacuum nozzle. Place the vacuum cleaner slightly lower than the grinder, so that gravity will assist in carrying away the heavier particles.—HARRY J. MORRIS.

## NEW KIND OF HEAT!



Does Away With Dirty Coal and Wood

### Turn Valve—Heat Instantly

Throw away the coal scuttle—banish the wood pile. Don't worry about coal shortage or high prices. Amazing new invention, the Oliver Oil-Gas Burner turns your heater, cook stove or furnace into a gas burner. No changes—in one minute you flip the Oliver into the fire box. You have as much or as little heat as you want at turn of valve.



### Cheaper than Coal or Wood—3 Times the Heat

Not an oil heater. No wicks, no smells, no waiting. A real gas burner. The Oliver makes its own gas from 95% air and 5% coal oil (kerosene) the cheapest fuel there is. Gives three times heat of coal instantly. Heats and bakes better, quicker by simply turning valve. Saves time, money, drudgery and heat 100,000 in use.

### Use it in Your Stove 30 Days FREE

Sixteen models—one for every stove, heater or furnace. No more building fires—no more heavy coal to carry and lift—no more cold rooms in winter. Put the Oliver in your stoves now—30 days FREE. Don't risk a cent. Iron-clad, Money-Back Guarantee protects you. Absolutely safe, last a lifetime.



### Write for FREE BOOK

Get this attractive book FREE. Tells all about the wonderful Oliver. Write now and get new low introductory price offer. Hurry! Get your Oliver in before winter. OLIVER OIL-GAS BURNER & MACHINE CO., 105 Oliver Bldg., St. Louis Mo. Oldest, largest manufacturers of Oil Burners in America.

**AGENTS** Earn as high as \$500 a month—\$25.00 a day spare time in easy, Exclusive territory. Real co-operation. Sells like wild-fire. Write for Free sample case offer.

Get an IDEAL Variable



## CONDENSER

**O**NE of the most efficient and reliable Condensers obtainable. Exceptionally well made and finished. Spacing of plates is unusually accurate. Phosphor bronze spring assures finer adjustment and holds moveable plates firmly in desired position; IDEAL Condensers will never slip out of adjustment. Pure Bakelite insulation. 1/4 in. shaft to fit any standard dial. Threaded holes for mounting on panel of set. Made in three sizes:

No. 1—43 plates—Capacity .001	\$4.75 each
No. 2—23 plates— " .0005	3.75 "
No. 3—11 plates— " .00025	3.00 "

### Ideal VERNIER Condenser

A well-made, accurate Vernier of excellent design and high quality. Low capacity, as a Vernier should be. Black fibre insulation. Price \$1.50

Ask your dealer for IDEAL CONDENSERS; the IDEAL name is your assurance of satisfactory service. Or we will ship your order direct at these prices. Made by the manufacturers of IDEAL Model Aeroplanes; the most perfect flying models of real Aeroplanes ever made.

**IDEAL RADIO MFG. COMPANY**  
159 Wooster St., cor. W. Houston St., New York City

**DIAMONDS-WATCHES**  
**CASH or CREDIT**  
**Genuine Diamonds GUARANTEED**  
Our Diamonds are distinctive in fiery brilliancy, blue white, perfect cut. Sent prepaid for your Free Examination, on CHARGE ACCOUNT.  
**Send for FREE Catalog**  
Everything fully explained. Over 2,000 illustrations of Diamonds, Watches, Pearls, Jewelry, Silverware, etc., at **GREATLY REDUCED PRICES**. The Diamond Ring illustrated is only one of a multitude shown in our large Catalog. Exquisite diamonds, \$25 up.  
**LIBERTY BONDS Accepted**  
**LOFTIS BROS. & CO., National Jewelers**  
Dept. F-871. 108 N. State St., Chicago, Ill.

## 5 Master Keys

Work like magic in emergencies or prove whether your door or padlocks are burglar-proof. Open and test thousands of different locks. Recommended by users in ten different nations. Most wonderful and only keys of their kind. Send \$1 today. Novel key chain FREE with set.

Master Key Co., 6 Manhattan Block, Milwaukee, Wis.




## THE HOME WORKSHOP

## Hinged Dripboard Provides Extra Space at Kitchen Sink

TO PROVIDE additional working space at the kitchen sink, I constructed a hinged dripboard as shown. The board was a piece of  $\frac{3}{8}$  by 15 by 28 in. dressed California pine, to which were attached strips of  $\frac{3}{8}$  by 2 in. molding. The seams were calked on the inside with a mixture of litharge and enough distilled linseed oil to make a putty. After this paste had "set" for about a week, it became as hard as the board itself and thoroughly waterproof.

To mount the board, a strip  $\frac{3}{8}$  by 5 by 24 in. was fastened against the wall horizontally and another strip  $\frac{3}{8}$  by 5 in. by 5 ft. was placed vertically at one end of the first strip.

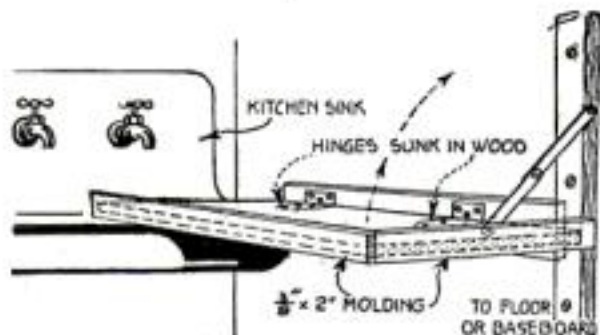

When not in use, the dripboard folds back against the wall

These were screwed to the wall after it had been tapped and plugged.

Two light steel 4-in. tee hinges were then used for hingeing the board to the horizontal strip in such a way that it inclined at an angle of 3 degrees toward the sink, the lower end projecting 2 in. past the rim of the sink. A stay for holding the board in position was made from two pieces of strap iron  $1/16$  by  $\frac{3}{8}$  by 6 in. I joined them by boring  $\frac{1}{4}$ -in. holes and making a rivet from a  $5/16$ -in. length of wire cut from a 20-penny nail.


The board, when folded back against the wall, is fastened with a hook and eye. The entire material cost me \$1.37 and proved an investment that was appreciated by the entire household.—WILLIAM H. DECK.

## Gaspipe Forms Ornamental Reading or Piano Lamp

OLD gaspipe and a little strap iron and brass can be worked up into a practical and good looking reading or piano lamp at a cost of next to nothing.

The stand should be of either  $\frac{3}{8}$ - or  $\frac{1}{2}$ -in. pipe. On top of the stand is screwed a tee, reducing to  $\frac{1}{8}$  in. The arm is bent from  $\frac{1}{8}$ -in. pipe and on one end of it is screwed an electric socket and shade holder. The ornaments are formed from strips of brass soldered or riveted to the arm; similar ornaments are attached to the stand. The feet are made from strap iron and attached to the pipe with stove bolts screwed into tapped holes in the pipe.

The lamp should be finished in dark bronze and the arms touched with gilt in polychrome effect. A suitable shade frame can be purchased.—PAUL W. TRIER.

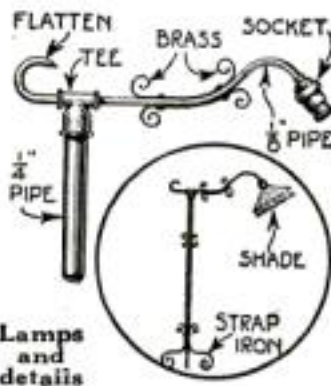

**\$91.50** **2 H-P.** **F. O. B.** **Factory** **OTTAWA** **LOG SAW**

**4 H-P.** 2 H-P. saws 8-in. logs as well as 5-ft. logs; Light weight; wheel mounted; easy to move. 4 H-P. saws logs, limbs; falls trees. Fast cutting. Start or stop saw while engine runs. Use engine for general belt work.

**BIG FUEL SHORTAGE!** Make big money sawing and selling wood. OTTAWA quickly pays for itself. Shipped direct from Factory or 9 branches at big saving. Write today for FREE Book.

**OTTAWA MFG. CO., 1806-D Wood St., Ottawa, Kan.**

**30 Days' Trial 10-YEAR GUARANTEE**

**Free Book**

**WRITE TODAY!**

## MOTORCYCLE BARGAINS

SAVE 25% to 65%

on Slightly used and Rebuilt Motorcycles, Side Cars, Johnson Motor Wheels, Evans Power Cycles, Bicycles. Send for Free Bargain Bulletin and Money Saving Message, listing hundreds of Bargains in used, rebuilt and new machines, supplies, accessories, etc.

**AMERICAN MOTOR CYCLE CO.**  
Dept. 1115, 2047 W. Chicago Ave., CHICAGO

## CUSTOM TAILOR MADE TO FIT YOUR INDIVIDUAL CAR



\$4.40 and Up  
Parcels Post Paid

Made in our custom shops after your order is received. We ship ordinarily in 2 or 3 days. Perfect fit guaranteed when correct name, year and model of car is given. You can easily apply it yourself. We furnish instructions and all necessary tacks, welts and fasteners. Our catalogue No. 11 with samples is free for the asking.

**LIBERTY TOP & TIRE CO., Dept. E-8, Cincinnati, O.**



## Learn the Radio Code in one evening

QUICKLY, simply—in a few hours—you can learn the secret of code messages—right from your own set.

Don't let the other fellows get ahead of you in wireless. Don't let the code hold you back from scores of interesting events. Listening in to concerts is only half the game. Learn the code and get your full share of fun.

## Try this short-cut system

This is not a tedious course. It is the most interesting and practical short-cut system in the Radio Code that has ever been offered. The lessons are entertaining as well as instructive.

This system should be in every home where wireless is used, whether the operator be young or old, skilled or unskilled.

The American Code way gives you the latest book on the Radio Code and then translates four lessons on two wonderfully interesting Okeh phonograph records. Just put the Okeh Radio Records on the machine, have the book handy, and presto! the code is learned in one evening.

**Text-book and 2 Records**  
all for \$2.00  
or book alone—50c

For a limited time we are offering this splendid system at a price of \$2.00. We cannot guarantee, however, that this offer will be continued indefinitely. We suggest that you order your set early.

Just drop in to your dealer, either radio or phonograph, and ask for the code book and Jack Binn's Okeh Radio Records. Or perhaps the simplest way for you to obtain the set is to send us your order with \$2.00 enclosed. The two Okeh Radio Records and code book will be sent you promptly. Address:

**American Code, Inc.**  
206 Broadway  
NEW YORK CITY

**Big FREE Catalog** **Get JENKINS' Low Prices!**

SAVE money by getting Special Low Prices on Jenkins' Nationally Known Orchestra and Band Instruments. Let us help you get started. Easy Payment plan—**Play While You Pay.** Learn to play from Jenkins' Band and Orchestra books. First Violin and Cornet parts FREE. Special Free Service for Orchestras and Bands. Ask about it. Send Today for Big Free Catalog. 44 Years in Business—13 Stores. 942 Jenkins' Bldg. KANSAS CITY, MO.

## RADIO

\$15 Down  
\$10.00  
a Month



## Unparalleled Offer

"SENSITONE" Long Distance Receiving Set, COMPLETE ready to use—no parts to buy.

Just what you have been waiting for—a complete, dependable, easily-operated, long distance Radio Receiving Set, ready to use, at a reasonable price and on easy terms. No shopping around for tubes, batteries and other parts—just put up the wires and you're ready to listen.

For the business man or farmer Radio brings valuable market and weather reports, stock quotations and other business information; and, in the evening, the whole family will revel in wonderful concerts, operas, lectures by highly-paid city talent, bed-time stories for the children—something good for every member of every household from the 310 sending stations in all parts of the U.S.

And, on Sundays, sermons by famous preachers and sacred concerts by great choirs and orchestras.

## Easy Payments

\$15 Down—\$10 a Month

A Thoroughly Reliable Set, manufactured under the Armstrong License (U. S. Patent No. 1,113,149).

Complete set in a handsome oak cabinet, vacuum tube, A and B batteries, head-set, antenna, insulators and ground wires.

Everything you need; with full directions, so you can set it up and begin listening at once to the good things of the world.

The SENSITONE is equal to any complete set you could buy at \$175.00, yet our price is only \$95.00 and you can pay for it \$15.00 down and \$10 a month, or if you prefer, send \$90 cash. Enjoy it while you're paying for it. Remember, set is complete—with nothing else to buy. You are buying from a reputable concern rated in Dun & Bradstreet or any bank will tell you.

**HAROLD R. WAKEM & CO.**

836 W. Washington Blvd. Chicago, Ill.

Please ship me one complete "Sensitone" Radio Receiving Set as described above for which I agree to pay \$15.00 herewith and \$10.00 per month until the full purchase price of \$95.00 is paid. Set to remain the property of Harold Wakem & Company until fully paid for.

Name .....  
Address .....





## After the THANKSGIVING DINNER hear the voice of the Outer World~

THE finest of soloists and orchestras—the most interesting and amusing of speakers—all are at your service, rendered by the wonderful power of Magnavox Radio the Reproducer Supreme.

Until you have heard a wireless program reproduced by the Magnavox, you cannot realize the enjoyment that radio brings to the home.



**R-2 Magnavox Radio** with 18-inch horn: this instrument is intended for those who wish the utmost in amplifying power; for large audiences, dance halls, etc. . . . . \$85.00

**R-3 Magnavox Radio** with 14-inch horn: the ideal instrument for use in homes, offices, amateur stations, etc. . . . . \$45.00

**Model C Magnavox Power Amplifier** insures getting the largest possible power input for your Magnavox Radio.

2 stage AC-2-C . \$80.00  
3-stage AC-3-C . 110.00

When you purchase a Magnavox product you possess an instrument of the highest quality and service.

*Magnavox products can be had of good dealers everywhere. Write us for copy of new illustrated booklet.*

**THE MAGNAVOX CO.**  
Oakland, California  
N. Y. Office: 370 Seventh Ave.

**MAGNAVOX**  
Radio  
The Reproducer Supreme


### THE HOME WORKSHOP

## 'Auto and Phonograph Horns Combined in Loudspeaker

By John A. Mahon

A LOUDSPEAKER I made for myself out of an old auto horn and a portion of a phonograph horn has given exceptional satisfaction. The volume of sound it produces easily fills a whole apartment, and it is absolutely devoid of rasping, mechanical noises. I compared it in respect to clearness, absence of distortion and appearance with five different kinds selling for \$45 and less and would not exchange it for any one of them.

To make one like it, obtain from a junk dealer one of the oldtime auto horns with a 4-in. bell, if possible. The larger the bell, the better. Remove the flexible tubing that joined the bulb to the horn and with it

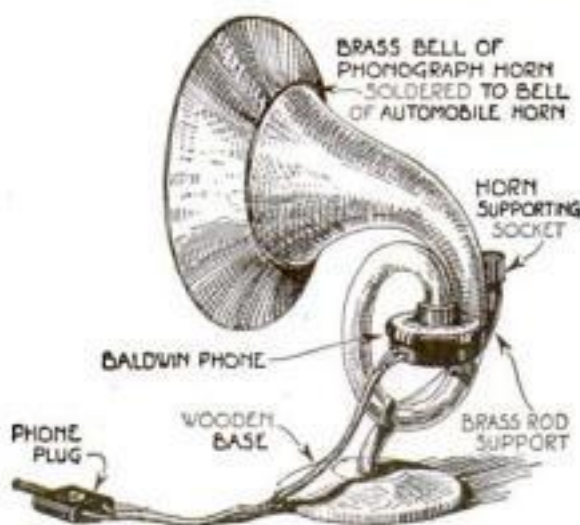

This makes an attractive looking as well as efficient amplifier

the reed of the horn. Then get an old tin phonograph horn with a brass bell that will fit the outer rim of the auto horn. Remove the bell from the phonograph horn and solder it to the bell of the auto horn, as shown.

Bend a piece of brass rod so that one end will fit in the socket of the auto horn where it was fastened to the auto, and insert the other end of the rod in a wooden base, which should be well weighted. Glue a piece of felt to the bottom of the stand.

I found that a Baldwin C phone exactly fitted the end of the horn where the reed had been removed. Other phones can be connected by means of a piece of rubber hose slipped over the phone and held to the horn by a rubber band or fastened with a metal clip soldered to the horn.

Polish up the old horn, give the base and body of the horn back of the bell a coat of black enamel, and you will have a dependable and satisfactory loudspeaker. The whole outfit, including horn and phone, should not cost more than \$8 or \$10.

## Ladder Hooks for Roofing Work

IN ORDER to use a short ladder in making roof repairs, a mechanic made two hooks simply by nailing horse-shoes to the upper ends of the ladder and bending the irons open. These hook over the ridge of the roof and hold the ladder securely.—S. L. D.



## The Mark of the Quality Radio Store—



WHEN you see this sign on the clean plateglass window of a radio shop you may enter—assured that the apparatus and prices are right; the stock complete; a competent radio expert in charge—and the Golden Rule in force.

**"It Pays to Buy at the Sorsinc Store"**

Mr. Dealer: If you are a progressive merchant you may display the Sorsinc sign. Let us tell you how.

Ship Owners Radio Service, Inc.  
80 Washington St., New York  
Wholesale Distributors

A full capacity folding typewriter. Writes in 17 different styles of English type and in 55 different languages. Two type sets with each machine.

**Hammond Typewriter Corp.,**  
597 E. 69th ST. NEW YORK

The Versatile  
**HAMMOND**  
TYPEWRITERS

**TELL US YOUR SPARE TIME.**

You can earn \$15 to \$50 a week writing show cards in your own home.—No canvassing.—A pleasant profitable profession easily and quickly learnt by our new simple graphic block system. Artistic ability not necessary.—We teach you how, and supply you with work—Distance no object. Full particulars and booklet free.

**WILSON METHODS LIMITED—DEPT. C**  
64 East Richmond, Toronto, Canada.

**Artists and Draftsmen  
Draw In Comfort**

with your board adjusted any desired angle. Revolve your board by using the **Hoffman Drawing Board Bracket**. A neat indestructible article Guaranteed to please you or your money back.

Price, Bracket without board, \$5.00 post paid in U. S. Descriptive Circular D, on request.

**HOFFMAN DRAWING STAND CO.**  
281 Meigs St., Rochester, N. Y.

**BUCHSTEIN'S FIBRE LIMB**

soothing to your stump—strong, cool, neat, light. Easy payments.

Braces for all deformities.

Guaranteed 5 Years  
Send for Catalog Today.

**P-BUCHSTEIN CO., 113 6th St., S., MINNEAPOLIS, MINN.**

**HIGH GRADE  
WIRELESS**

Head Receivers, Microphones, Keys, Jacks, Etc.

MANUFACTURED BY  
**American Electric**  
COMPANY  
STATE AND 64TH STS., CHICAGO, U. S. A.




## THE HOME WORKSHOP

## Making a Projector for Picture Postal Cards and Photos

By Harry L. Gray

A POSTAL-CARD projector will provide an unlimited source of evening entertainment. The construction of the apparatus is not difficult if electric current is available. Two bulbs, preferably 75-watt, will be needed, as well as two reading-glasses. These can be 3 and 4 in. or 4 and 5 in. in diameter. The larger glasses will give a much brighter image on the screen.

A box to contain the bulbs, lenses and reflectors can be made of wood or metal. The dimensions indicated on the drawing will prove about right, but they can be varied somewhat to suit the material on hand. Hinged at the bottom, the back

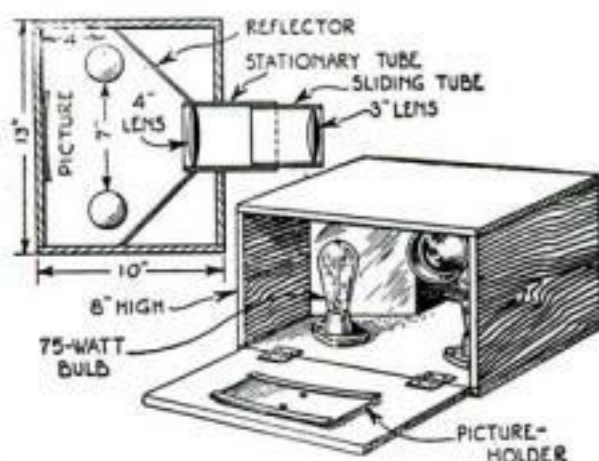

The projector with door open, and view showing location of lights, reflectors, and lenses

opens downward to make easy the changing of the pictures. The postal-card holder should be slightly curved for best results, as that allows all parts of the picture to be brought into focus at once.

A reflector is placed in each forward corner of the box; these can be of bright tin or tin, enameled white. The interior of the box should be enameled white with the exception of the back and the lens tubes, which should be black. The lens tubes can be made of metal or cardboard, or sometimes two cans may be found that will slide within each other. One of the glasses is fastened in the end of each tube, the larger glass being placed to the rear. After the apparatus has once been focused, the tube with the large lens is fastened solidly in place and the smaller tube used for all further focusing.

In case electric current is not to be had, the constructor can use acetylene. Simply place a burner in the positions of the light bulbs, and use a tank or small acetylene generator.

Any kind of pictures may be shown, but they will be reversed on the screen. This is not, however, objectionable, unless there is lettering on them, in which event the pictures should be viewed from the back of the screen.

## To Remove a Broken Ax Handle


A GOOD way to remove a broken ax handle from the eye of the blade is to saw off the wood even with the blade and drill a hole through the piece that remains incased within the steel. Next, make four cuts with a hacksaw, quartering the wood so that the four pieces can be driven out easily.—W. M. SCHMIDT.



## Ives Trains will make you smile too

AN IVES Railroad System will make any boy smile. They range from \$1.75 to \$50.00 in price. There are spring locomotives that whiz around an "O" gauge track and monster electrics that operate on standard 2 gauge track, exact copies of the latest New York Central models.

The Ives Railroad Systems have a dazzling variety of bridges, tunnels, switches, passenger and freight stations, signals and railroad equipment lights. The freight cars are painted like the real ones on principal railroads, coal cars, tank cars, flat cars, lumber cars, cabooses.

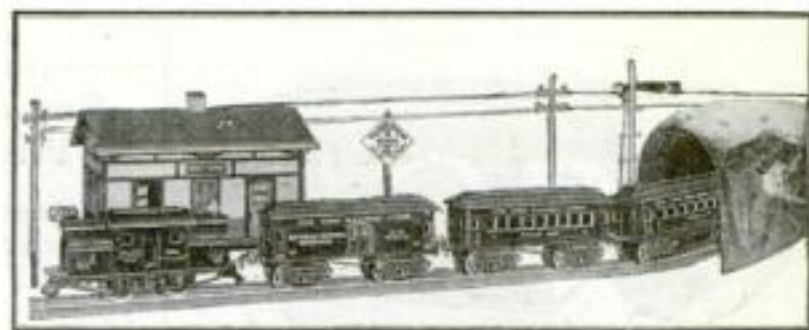

## SPECIAL \$15 COMBINATION

The Ives Electric Train Outfit, 31 inches long, consisting of reversible locomotive with electric headlight, 3 cars with automatic couplers. 14 feet of track, station, tunnel, semaphore, danger signal and 6 telegraph poles. If your dealer can not supply you send us the money and we will see that you are taken care of.

The Ives Trains can be operated either indoors or out. After the indoor season their substantial construction makes them an ideal outdoor toy. Boys can build a railroad, running a spur track to the edge of a pond or brook, ship the freight to a miniature wharf and load it on an Ives merchant ship—an entire transportation scheme all with Ives equipment. No other manufacturer furnishes this complete outfit. It can all be bought in separate units.

Send 10c right now for our dandy 1922 catalog ablaze with colors, showing Ives Trains and Boats.

THE IVES MANUFACTURING CORPORATION  
202 Holland Avenue Bridgeport, Conn.

Ives Toys  
MAKE HAPPY BOYS

## "Bowlegs and Knock-Knees" Unsightly

Send for Booklet Showing Photos of Men With and Without  
**The Perfect Leg Forms**  
PERFECT SALES CO., 140 N. Mayfield Ave., Dept. 45, Chicago, Ill.

## Manufacturer to Consumer

**Varicoupler**  
Anywhere on receipt of \$2.50

We manufacture fifty standard Radio parts. Send two cent stamp for catalog.  
**AJAX CO.**  
7304 Stony Island Ave. Chicago, Ill.

**Varimeter**  
Anywhere on receipt of \$3.25



Useful 24 hours a day

Your Davenport-Sofa  
Bed—20c a Day

Upholstered in flowered tapestry or imitation leather. Cane-panel ends. A roomy, attractive sofa for daytime. A restful bed for night time. This sofa and 1200 other equally attractive furnishings offered in our big, 104-page, FREE Larkin Book of Better Homes. A trustworthy guide to thousands of home-lovers in home beautifying. Check below offer interested in.

## Lower Prices Now On

☐ Furnishings ☐ Symphonic Player Pianos  
☐ Symphonic Pianos ☐ Symphonola Phonographs  
(Check offer and mail ad today)  
Let us quote our money-saving Factory-to-Family prices on these Furnishings and famous Musical Instruments.

**1 to 4 Years' Time to Pay**  
Mail this ad—check offer—and give full name and address NOW for Big FREE Book.

**Larkin Co Inc.**  
Desk FPSM-1122, Buffalo, N. Y., Peoria & Chicago, Ill.

BE A  
RADIO WIZARD

Have your set the best. Make the other fellows look up to you as a radio expert.

It's easy when you have the Standard Radio Encyclopedia, by A. Howland Wood, Ex-Navy Instructor and Radio Engineer. Explains every instrument plainly. Tells how they work. Shows how to build, hook-up and operate. Nearly 100 illustrations, wiring diagrams, etc. Written in plain English that clearly explains the most difficult technical terms.

You need this book to really know radio. It only costs \$2.00 postpaid. Your money gladly returned if you are not absolutely satisfied. Order today from Perry & Elliott Co., 146-E Summer St., Boston, Mass.

## EASY ORDER BLANK


**PERRY & ELLIOTT CO.,**  
146-E Summer St., Boston, Mass.

Enclosed is \$2.00. Send me The Standard Radio Encyclopedia. If I'm not absolutely satisfied, I can return it and get my money back.

Name.....

Address.....



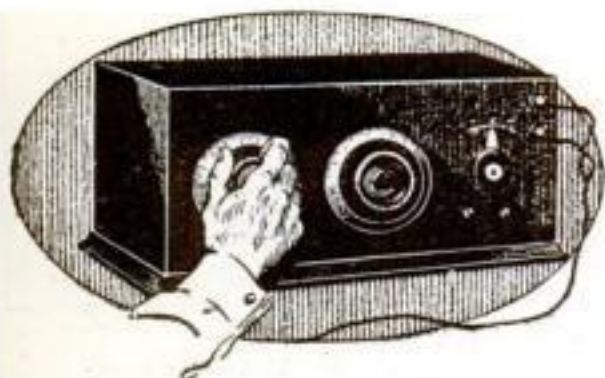

**You can get the best insulation now!**

**A**NY dealer can get Formica quickly now so there is no longer any need to use an insulation in which you have less confidence.

Our large capacity makes it possible for us to keep fully abreast of the large radio demand—and to serve all of our customers promptly.

When you insist on Formica you get an insulation that is approved by the navy and signal corps—and one that is known by the makers of the finest radio apparatus as being leak-proof, warp-proof, and remarkably uniform in insulating quality.

Formica works well with ordinary tools. You can produce a perfect panel, and all you need is a drill. It has a wonderfully attractive finish and holds it during a long life. Dampness, fumes, chemicals, do not injure Formica. It is almost immune to conditions.

That is why it is the most popular of all radio insulating materials.

**DEALERS:** We have many valuable dealer helps. Store cards, folders, plates for advertising. Call on us for cooperation.

**THE FORMICA INSULATION COMPANY**

4630 Spring Grove Ave.  
Cincinnati, Ohio

**FORMICA**  
A Laminated Phenolic Condensation Product  
SHEETS TUBES RODS

THE HOME WORKSHOP

**Screw Fastens Steel Wedge Permanently in Handle**

**T**HE accompanying illustration shows an effective method of permanently securing the wedge in the handle of a carpenter's or machinist's hammer, so that neither jarring nor the shrinking of the wood will



cause the handle to come out of the eye of the hammer.

The wedge is made of steel and should be wide enough to reach lengthwise almost across the hammer's eye. In the center of the wedge a hole is drilled with a diameter slightly larger than the thickness of the wedge at its thickest part.


Then two parallel saw-cuts are made from the thick end of the wedge to the hole, so as to form a slot with rounded bottom.

The wedge is driven into the handle as shown in the picture and a wood-screw is screwed into the slot until its point is stopped by the rounded bottom of the slot. The projecting portion of the screw is then sawed off and filed smooth.—R. H. Y.

**Hand Twister for Stretching Wire**

**S**TRETCHING fence wire is an easy matter with a tool such as is illustrated, which is simply a tee made of short lengths of 1-in. pipe.

This tool is used by a Maryland farmer for practically all his fence work. The end of the wire to be stretched is passed through a staple to guide it and into a small hole in the stem of the tee, then being twisted about the pipe.




A useful one-man tool

After the wire is tight, the staple is driven entirely in to hold it.—G. A.

**Strong Hinges for Garage Doors**

**T**HIS simple form of hinge was made especially for hanging a heavy garage door. It was forged by heating two lengths of bar stock, and twisting them around each other. The ends were then flattened and drilled for bolts.

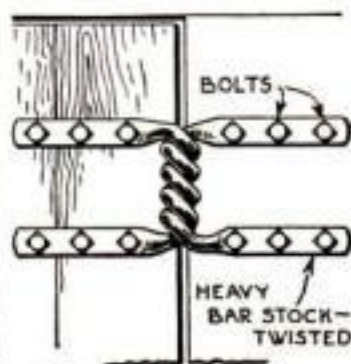

A self-opening or closing hinge

The construction is such that the weight of the door causes it to swing open when unlocked. By twisting the rods in the reverse direction the hinge could be made to swing shut if desired. It is practically indestructible and works easily when oiled.—S. L. J.

**WINTER'S COMING START A BAND**

A good musician need never worry about a job. He's welcome anywhere, any time. King instruments are easy to play because perfectly constructed. They are the choice of leading musicians everywhere. We sell complete band equipment direct to users. You save all middleman's profits. Write for our special proposition for band leaders and organizers.

**Easy Payment Plan**

Buy new King Saxophones, Trombones, Cornets, Baritone, Basses, Altos, Drums, etc., on our easy payment plan. Free ten day trial. Then a small sum down. Balance in easy monthly payments.

**Big Stock of Re-built Instruments**

If you want to start a band of untrained players write for our latest list of re-built instruments. Good as new. Very low in price. Ask for big free, illustrated catalog showing instruments and prices.


THE H. N. WHITE CO.

5200-03 Superior Ave. Cleveland, Ohio



**ADD \$5.00 a DAY to YOUR PROFITS with a TORIT ACETYLENE TORCH No. 13**

For radiator repairing, general soldering, light brazing, heating, battery repairing, etc. Produces instant hot flame, works rapidly. Furnished with 4 different tips and soldering copper, enabling you to do a wider range of work.

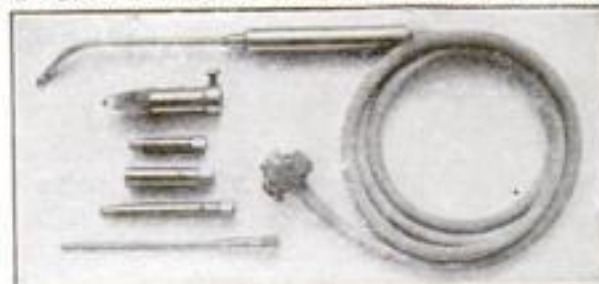

**USES ACETYLENE ONLY**

A splendid use for discarded auto acetylene tanks. Many owners make the Torit No. 13 pay for itself in a single day. Torch with 4 different tips; soldering copper, 5 ft. tubing and connection for auto acetylene tank \$7.50.

Order today from your jobber, or  
St. Paul Welding & Mfg. Co., 164 W. 3rd St., St. Paul, Minn.



**SEXUAL KNOWLEDGE**

**ILLUSTRATED**  
By WINFIELD SCOTT HALL, M.D., Ph.D.

**SEX FACTS MADE PLAIN**

What every young man and  
Every young woman should know  
What every young husband and  
Every young wife should know  
What every parent should know

\$1.00

Postpaid

Mailed in plain wrapper

Cloth binding—320 pages—many illustrations

Table of contents, & commendations, on request.

AMERICAN PUB. CO., 1117 Winston Bldg., Philadelphia

**Rabbit Book FREE**

Illustrated. Facts about the easy, profitable home industry—growing domestic hares for meat, fur, fancy. Little space—cheap equipment. Big demand. We buy all you raise at \$7 to \$18 per pair. Turn your spare time into cash. Book free—write now.

**STANDARD FOOD & FUR ASS'N**  
407-C Broadway New York City

**Wrestling Book FREE**

Learn to be an expert wrestler. Know scientific wrestling, self-defense, and jiu-jitsu. Develop a splendid physique, and have perfect health. Join this popular school and learn by mail. The famous world's champions—the marvelous  
**Frank Gotch and Farmer Burns** offer you a wonderful opportunity. Wrestling is easily and quickly learned at home by mail. Men and boys write now for splendid free book. Learn all the science and tricks. Be able to handle big men with ease. Accept this wonderful offer NOW. Send for free book today, stating your age.  
Farmer Burns School of Wrestling, 1788 Range Bldg., Omaha, Neb.





## The Shipshape Home

### How to Do the Odd Jobs

#### Fixing That Balky Door

QUITE often there will be a door in the house that is a "lame duck." You try to close it and it will not close tightly; you try to open it and it sticks; and when your back is turned, it seems to swing open of its own accord. When you try to latch it, the plunger seems either too short to reach the striking plate or will not enter it. And it is quite probable that the hinges creak, too.

Let's perform an "operation" on the door. Pull the pins from the hinges, or, if

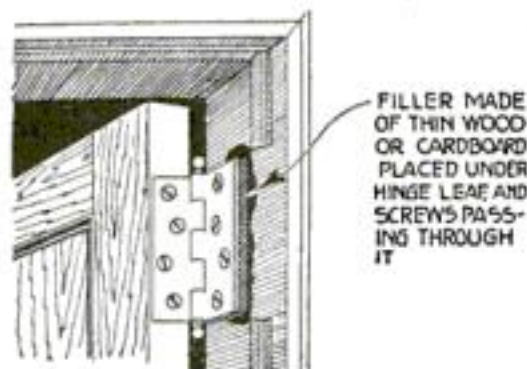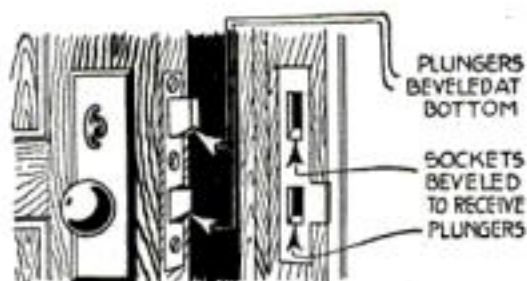

Three suggestions for altering doors that do not close easily

necessary, remove the screws from one leaf of each hinge, and take down the door. Dress off the part at the top or the bottom that would not permit it to close. If much wood is to be removed, it is best to saw it, but in most instances you will find that the work is easier done with a hand plane, rasp, or even coarse sandpaper. Do not varnish the raw edge, but rub on paraffin wax, cover with paper, and pass a moderately warm iron over it several times.

To make the lock catch, place pads cut from fiber board, pasteboard, or thin wood between the hinges and the door-jamb. Oil the hinges and pins and rehang the door. If the bolt still refuses to enter the striking plate, file the top or bottom of the plunger to a bevel, and if that is not sufficient, bevel also the top or bottom of the socket into which it is to fit.—LEROY CRIGLER.

#### Connecting Lead Pipes

THE household mechanic has a good deal of difficulty in connecting lead piping by means of the conventional "wiped" joint, particularly when the splice is to be made in some inaccessible place. The following method requires little skill and completely eliminates any danger

(Continued on page 126)

# Radio

The Greatest Radio Offer of the Year—Absolutely Complete, \$49.50

This special receiving outfit will give as good results as any outfit of this improved type on the market. It is absolutely complete, there is nothing extra to buy. We include everything—you simply put up the aerial, connect the instruments, which is easy to do, and in less than half an hour you can be receiving signals, radio music, lectures, stock reports, market reports, or any other radio program sent out. In making tests with this set in Chicago we regularly heard Detroit, Pittsburgh and other stations were often tuned in. Of course, atmospheric conditions affect the range of this or any other receiving set made.

#### Highest Development in Radio Receiving

This outfit will equal in results any outfit of this type regardless of price. It is especially made for us and has behind it the fifty year old guarantee of Montgomery Ward & Co.: "Satisfaction guaranteed or your money back." You take no risk whatever in ordering this set.

#### Long Distance Vacuum Tube Receiving Set

The complete outfit includes our special Combined Tuner and Detector; Special 2000 ohm Double Head Set; Radio Storage Battery; one Detector Tube, one "B" Battery; and complete antenna and connecting equipment including 150 feet bare copper wire and 25 feet insulated wire, porcelain tube; double throw switch; 2 antenna insulators; lightning protector; ground clamp, 2 screw eyes and 25 feet of wire for instrument connections.

Order this set at our risk. It will be packed carefully and shipped immediately from our nearest house. Shipping weight 40 pounds.

5632599—Complete Outfit, \$49.50

Order this outfit today and start at once enjoying in your home the most marvelous invention of the age. Price of receiving set without batteries, head piece, switch and aerial, shipping weight 8 pounds: 5632598—\$27.50.

Send money order or check to the one of our five houses that is nearest to you.

MONTGOMERY WARD & CO., Dept. 5-R

Chicago Kansas City Saint Paul Fort Worth Portland, Ore.



## Montgomery Ward & Co.

The Oldest Mail Order House is Today the Most Progressive

#### Only \$45.00 For This Job Complete

Save exorbitant freight rates and one-half original cost by buying Ford Speedster Bodies knocked down. Simple, complete instructions furnished, all parts cut to exact fit. Any one can assemble this job. Complete with hood, radiator shell, instrument board, upholstery, metal parts, wood parts, bolt screws, etc. Flat radiator shell furnished made up. Designed low with lack of wind resistance. Price set up \$90. Further particulars on request. The Central Auto Supply Co. Eng. Dept. 122 Louisville, Ky.



#### Home School Club MARVELOUS MOVIES Church Camp Office

The most beautiful and best constructed motion picture machine for the price in the world. Shows the same clear, crisp movies the big theatres exhibit. Child or grown up can easily operate the Paramount without any previous experience. Do not confuse this machine with toys at the same price. The Paramount is not a toy. It is a real, wonderful, guaranteed machine made of best materials by skilled workmen.

Just attach the electric plug to any electric current and turn the crank and your show is on. The entire outfit, complete, weighs only twelve (12) pounds.

Our Film Service Is Available


Includes best movie stars

The PARAMOUNT Motion Picture Machine (Patents Pending) Price, \$35.00

(Sent anywhere—ready for use)

Inquire at your nearest dealer. If he cannot supply you write us mentioning dealer's name and we will send you our free catalogue.

Remember there is no substitute for the PARAMOUNT  
**PARAMOUNT MFG. CO.**  
Box 371; Dept. 68-D BOSTON, MASS.

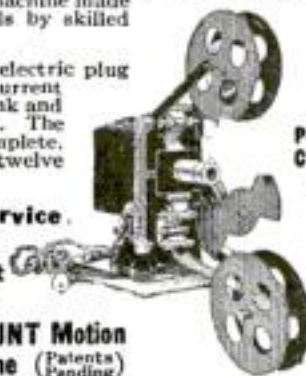

Professional Construction Absolutely Safe



#### Marvelous Book Sent FREE

You can now learn Taxidermy, the wonderful art of mounting birds, animals, tanning skins, etc. Learn at home, by mail. The free book tells how, about your own trophies. Decorate home and den. Hunters, trappers, nature lovers, you need taxidermy. Interesting, fascinating, big profits. Join our school, 15,000 students. Success guaranteed. Get our free book with out delay. Send right now—today.

N.W. School of Taxidermy 1188 Elwood Bldg., Omaha, Neb.



#### High School Course in Two Years

Lack of High School training bars you from a successful business career. This simplified and complete High School Course—specially prepared for home study by leading professors—meets all requirements for entrance to college and the leading professions.

#### 30 Other Courses

No matter what your business inclinations may be, you can't hope to succeed without specialized training. Let us give you the practical training you need. Check and mail Coupon for Free Bulletin.

**American School**  
Drexel Ave. and 58th St.  
Dept. H. 875 Chicago

Send me full information on the subject checked and how you will help me win success.

.....Architect	.....Lawyer
.....Building Contractor	.....Machine Shop Practice
.....Automobile Engineer	.....Photoplay Writer
.....Automobile Repairman	.....Mechanical Engineer
.....Civil Engineer	.....Shop Superintendent
.....Structural Engineer	.....Employment Manager
.....Business Manager	.....Steam Engineer
.....Cert. Public Accountant	.....Foremanship
.....Accountant and Auditor	.....Sanitary Engineer
.....Bookkeeper	.....Surveyor (and Mapping)
.....Draftsman and Designer	.....Telephone Engineer
.....Electrical Engineer	.....Telegraph Engineer
.....Electric Light and Power	.....High School Graduate
.....General Education	.....Fire Insurance Expert
.....Vocational Guidance	.....Wireless Radio
.....Business Law	.....Undecided

Name .....  
Address .....





## EASY TO WORK RADION

**RADION** Panels can be easily cut, drilled, sawed, threaded, tapped, sanded, stamped and engraved by the amateur without incurring the danger of chipping or leaving rough edges. No other panel combines the same high dielectric strength and beauty with these ideal working qualities.

Send for complete Radion Catalog listing stock sizes of Black, Brown and Mahogany (mahogany grain) Panels, together with complete list of Moulded Radion Parts.

**American Hard Rubber Co.**  
11 Mercer Street - - - New York, N. Y.  
Chicago Office - - - Conway Building

*Like the  
romance of  
radio itself*

is the story of the phenomenal growth of the company whose name has been linked with radio from the earliest days—Twelve years is a long time in radio—yet over twelve years ago—in 1909 to be exact, William B. Duck began his pioneer work in radio equipment.

Way back in those early days Mr. Duck foresaw with an almost perfect vision the ultimate growth of radio. He was the first and only one to put a "human touch" in a catalog embracing a scientific subject; he realized how largely educational such a catalog must be to accomplish its ultimate purpose—and today, with radio on every tongue, there is in Duck's Wonder Catalog an even larger wealth of practical radio information and diagrams than will be found in any of the earlier editions—and in language easy for the layman to understand. It is little wonder that Duck's catalog is universally known as "The Radio Amateur's Bible."



embraces 62 instruments—58 parts—the largest and most comprehensive line produced by any radio manufacturer. They should be had at all worthwhile retail stores throughout the United States and Canada. In selecting your radio equipment at your dealer's, insist on seeing Duck's products—products that have stood the test of time.



### DUCK'S Big 256-Page CATALOG

as well as all former editions is now, as in the past, all radio catalogs in one. No other even half so large. It displays not only Duck goods but the products of practically all worthwhile manufacturers and contains more up-to-date and practical

radio information than will be found in many text books.

Send 25c in coin for this wonderful book—a retainer that hardly pays the cost of printing.

#### DEALERS

We offer facilities and advantages not equalled by any other radio house. Write or wire for our proposition.

**THE WILLIAM B. DUCK CO.**  
224-228 Superior St., Toledo, Ohio  
Established 1909

**HERE'S A REAL BUSINESS!**  
**IT'S DIFFERENT**  
Start permanent business. Everything furnished. Work anywhere, only table room required. \$25.00 to \$75.00 weekly operating Tangley Art Portrait Landscape Painting Business. No experience necessary. Hundreds successful workers. Free booklet.  
Tangley Company 178 Main, Muscatine, Iowa



**BUY  
TO-DAY  
10  
MONTHS  
TO PAY**



## Send No Money

**Ladies Diamond Solitaire Ring  
Examination FREE**

**\$2.00  
A  
MONTH**

This exquisite, blue-white perfectly cut Diamond, in ladies' 14K solid-gold setting will be sent FREE of charge, all transportation charges prepaid, for your examination. If satisfied, pay only \$5.00—balance at \$2.00 a month for ten months. Buying direct assures you this Rock Bottom Price, on easy credit terms. Take advantage of this amazing offer TODAY! Only \$2.00 a month after you have examined the ring and find it all and more than you expected. If not satisfied, simply return—examination will have cost you nothing.

**No Security! No Red Tape!  
We Gladly Trust You**

**Free**

Send postal for  
Greatest Diamond,  
Watch and Gift Book  
ever published.

Let us send you FREE this beautiful De Luxe Catalog No. 472-S. Contains 98 pages in colors, showing the most wonderful assortment of exquisite designs in Diamonds, Watches and Jewelry. Ten months to pay on everything. Write today. Address Dept. 472-S.  
Capital, \$1,000,000



**"THE HOUSE OF QUALITY"**  
**L.W. SWEET INC.**  
1650-1660 BROADWAY, NEW YORK

### THE HOME WORKSHOP


#### The Shipshape Home

(Continued from page 125)

to property or fingers from the melted lead.

To connect pipes of the same diameter, secure a union of the proper size and screw each part separately to each end of the pipe, running through about  $\frac{1}{4}$  in. beyond the end. With a tapered pin of the proper size and a hammer, swage over the pipe that projects, and, if thought necessary, expand the lead pipe well into the threaded part of the union. Screw the two parts together in the usual way; a very tight joint will result.

To connect pipes of different sizes, procure a cap which will fit tightly inside the

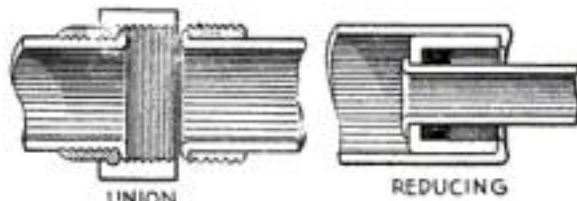

Two easily made joints for lead pipes

larger pipe and drill a hole of the size of the smaller pipe in the end. Push the end of the smaller pipe through the cap and through the drilled hole so that it projects about  $\frac{1}{2}$  in. Swage over this part and pour enough melted lead into the inside of the cap to have a layer  $\frac{1}{2}$  in. thick. The lead pipe should be scraped to let the lead take hold. The cap is then driven into the larger pipe so that  $\frac{3}{4}$  in. projects, and this is turned over into the cap, if possible. The pipe should also be hammered down to fit the cap closely.—MYRON DRACHMAN.

#### Bolting into Cement

A THREADED hole may be made in cement very easily whenever it is necessary to bolt a table, bench, or machine to a concrete floor, or to fix brackets to concrete walls or ceilings. Drill holes in the concrete somewhat larger than the bolt and then wind the thread of each bolt with wire, the diameter of which is about equal to the pitch of the thread. Place the wire and bolt in the hole and pour cement around them. In hardening, the cement will hold the wire thread firmly so that the bolt can be screwed in or out with very little difficulty.—HAROLD F. BLANCHARD.

#### Cementing Celluloid

WHEN film cement cannot be obtained for cementing celluloid and mending broken celluloid articles, the following preparation may be used instead:

In 1 oz. of acetone dissolve about 8 sq. in. of celluloid or old photographic film that has had the emulsion washed off. Paint a thick coat of this solution over both sides of the break and press or clamp the broken parts together. Small strips of the washed film can be cemented over the break with the same solution, if it is desired to strengthen the joints further.

Acetone, which may be obtained at any drug store, is the natural solvent for celluloid.

In addition to using this solution of celluloid in acetone for repairing celluloid articles, it can be coated over brush brass and nickel-plated ware and even over plain wooden articles to preserve or enhance their original finish.—F. ST. BOULANGER.



This One



6YFC-DXU-ZY6W








## THE HOME WORKSHOP

## Miniature Radio Cabinet Has Slide Tuning Coil

A MINIATURE radio receiving set of the loose coupler type was under construction in which the primary coil was 4 in. long and  $1\frac{1}{8}$  in. in diameter, wound with No. 28 wire. It was to be mounted in a little cabinet. Close tuning was desired, involving the taking off of a considerable number of taps. In such a small outfit this meant a lot of time, and time was limited. The same result was accomplished by using a slide tuning device.

The coil was fastened in the cabinet with the scraped contact path for the slider underneath, so that particles of metal worn off would fall away from the wire and not lodge between the turns and short circuit them. To an ordinary slider, from which

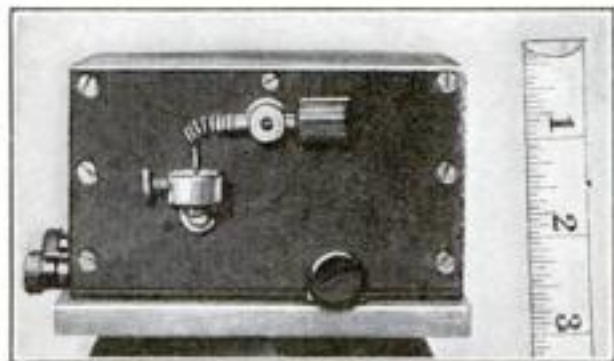


A sliding lower knob regulates wave length of this tiny crystal receiving set

the usual contact finger was removed, a brass plate was soldered, as shown. This was of thin spring brass. One end was cut down to form a flexible tongue and bent to make contact with the coil at the proper place, and the other end was bent so that it was vertical when in place.

The rod for the slider was placed close to the bottom of the cabinet, near the front. The composition panel,  $\frac{1}{8}$  in. thick, did not reach quite down to the base, so that there was a slit about  $\frac{1}{16}$  in. wide through which the slider plate projected. The bent part of the plate was parallel with and not quite touching the panel. To it a black composition knob was secured. This was quite a little job in itself. A brass screw was turned tightly into the socket of the knob and then cut off so that it projected only a trifle more than the thickness of the brass plate. The screw was passed through a hole in the plate, soldered and filed flush.

The slider was guided in its movement by the lower edge of the panel and the wooden base. The rod used was tubular, cut exactly to the length of the inside of the cabinet, and the ends tapped for machine screws. One end was held by a machine screw with the head countersunk in the wood, and the other by the screw of a binding-post for the ground lead.

A small crystal detector made up of a cup mounted on a nicked angle plate, a rod with a catwhisker on one end and a binding-post knob on the other, and a binding-post through which the rod passed, were mounted on the panel. In all other respects the set is just an ordinary loose coupler on a small scale. The secondary is wound with No. 32 wire. Under favorable conditions, the set will bring in broadcasting over a distance of 25 miles.—HOWARD GREENE.



Section through slider



# The New Science of Health

## CHIROPRACTIC (ki-ro-prak-tik)

BE WELL—BE HAPPY—BE SUCCESSFUL

STUDY this wonderful new science at the greatest school of its kind in the world — THE PALMER SCHOOL



This school is co-educational. Founded in 1895 it has expanded until today the faculty numbers thirty-seven.

The field is unlimited. We receive letters constantly from communities asking to send graduates to locate with them. People will pay anything for health. Chiropractic is the new science of health. Write for prospectus on our courses. 3,000 happy, contented students want you to join us.



B. J. PALMER  
President

WRITE TODAY

## The Palmer SCHOOL OF CHIROPRACTIC

(CHIROPRACTIC FOUNTAIN HEAD)

11th and Brady Streets

DAVENPORT, IOWA

We Have No Branches or Affiliated Schools



It Clamps  
Everywhere  
—stands  
anywhere

\$5

The  
LAMP  
with the  
CLAMP

## Adjusto-Lite

A FARMERWARE PRODUCT

Adjusto-Lite is the handy, economical light for home, office, store, studio—everywhere good light is needed. HANGS—CLAMPS—STANDS. The name says it—it's quickly adjustable. A turn of the reflector sends the light exactly where you want it. No glare—no eyestrain. And—economy.

Solid brass; handsome, durable and compact. Clamp is felt-lined—can't scratch. 5-yr. guarantee. Complete with 8-ft. cord and screw socket with 2-piece standard plug.

Get an Adjusto-Lite today. If your dealer doesn't carry it order direct.

S. W. FARBER

141 So. Fifth St., Brooklyn, N. Y.

Prices in U. S. A. and Canada, brass finish, \$5; bronze or nickel finish, \$5.50. West of Mississippi and Canadian Rockies and in Maritime Provinces, 25c per lamp additional.

TRADE MARK



\$1.00

Compass  
and  
Sun Dial

## The Ansonia SUNWATCH

Tells the correct time by the sun anywhere in the United States, and heads you in the right direction when you have lost your way.

For: Hunters, Fishermen, Canoeists, Motorists, Campers, Guides, Boy and Girl Scouts.

In a thin, satin-finished brass case, with latitude, longitude and variation tables on inside cover.

If you cannot get it from your dealer, send us a dollar attached to this adv. with your name and address below.

ANSONIA CLOCK COMPANY  
99 John St. Dept. M New York  
Makers of Fine Clocks for Half a Century


Name.....

St. & No. ....

City .....

American Sunwatch not adjusted for Canadian latitude and longitude. Canadian price \$1.50. Distributors: The Goldsmiths' Company of Canada, Ltd., 50 Yonge St., Toronto, Canada.



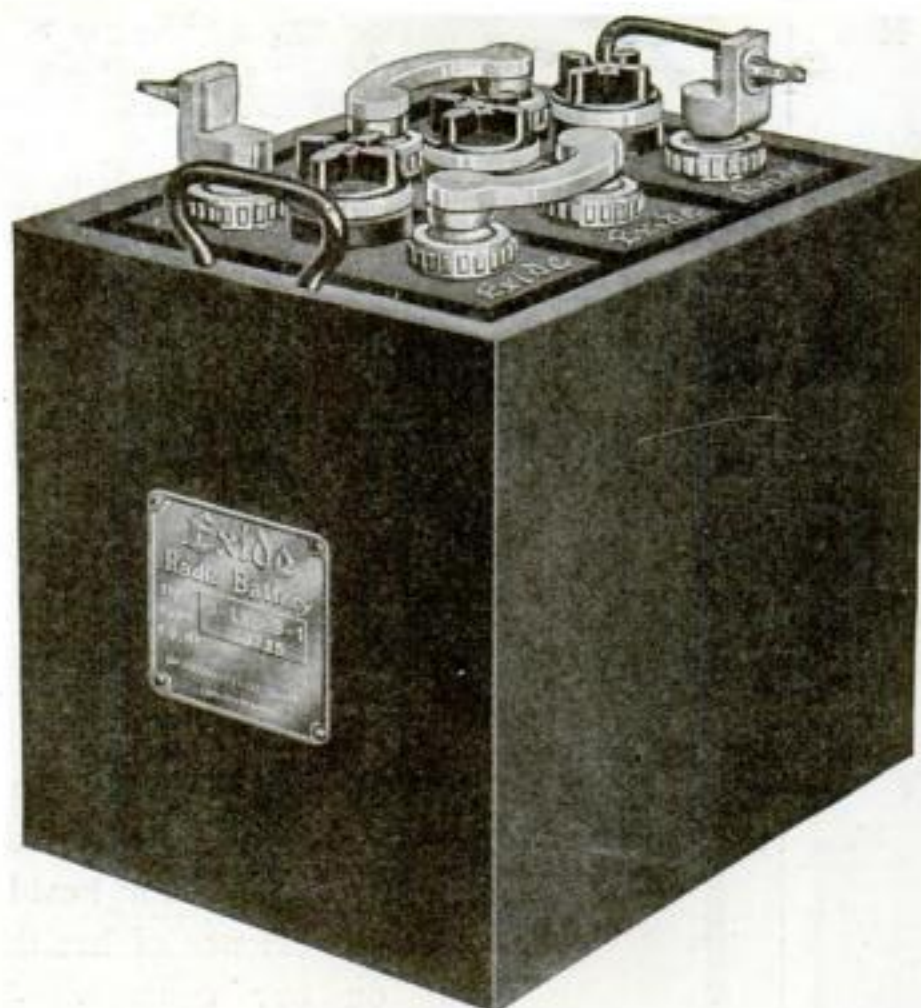

## Cheap batteries are costly

**T**HERE is no economy in buying a frail battery even at a slender price. Such a one gets out of order and does not last long. There is dollars-and-cents saving in getting an Exide Radio Battery, because it gives dependable service so much longer than you will receive from an ordinary battery.

The Exide Radio is designed especially to maintain constant voltage during a long period of discharge. You don't have to keep fussing with it. You can be

sure of an Exide, just as men whose lives depend on a battery rely on Exide power. A majority of the world's submarines are propelled under the sea by Exide Batteries. The telephone and telegraph systems use Exides to transmit their messages. Most of the government and commercial plants are Exide equipped.

Ask for an Exide Radio Battery at any place where radio equipment is sold. All Exide Service Stations sell Exide Radio Batteries and also recharge batteries.

**THE ELECTRIC STORAGE BATTERY COMPANY**  
Philadelphia

*Oldest and largest manufacturers in the world of storage batteries for every purpose*

# Exide

## BATTERIES



# COLGATE'S

**"HANDY GRIP"**  
REG. U.S. PAT. OFF.

**The Refill Shaving Stick**



## Like Putting a New Film in a Camera

**P**UTTING a Colgate "Refill" Shaving Stick into the "Handy Grip" is like putting a new film in a camera—easy, simple, and done in an instant.

The "Handy Grip" and metal container last for years. When you need "Refills," buy them for the price of the soap alone.

In hot water or cold, in hard water or soft, Colgate's lathers quickly, and needs no mussy rubbing in with the fingers. It leaves the face cool and refreshed.

The stick is the most economical form of shaving soap. We can give you this assurance impartially, since we make shaving powder and cream, as well as shaving sticks. But if you prefer cream, you will acknowledge when you have shaved with Colgate's Rapid-Shave Cream that you never knew before how good a shaving cream could be. It is one of our latest products, made on a new principle, and brought to perfection after years of scientific effort.

COLGATE & CO. Dept. R 199 Fulton St., New York

*The metal "Handy Grip," containing a trial size stick of Colgate's Shaving Soap sent for 10c. When the trial stick is used up you can buy the Colgate "Refills," for the price of the soap alone. There are 350 shaves in a Colgate Shaving Stick—double the number you can get from a tube of cream at the same price.*







## For all great music you need the Victrola

Great music is truly great only when it is given adequate interpretation.

On Victor records the great music of the world is interpreted by the most famous artists of the world. The Victrola is the one instrument specially made to play Victor records. Used *together* the Victrola and Victor records present for your enjoyment the highest achievements in the world of music.

Victrolas \$25 to \$1500. New Victor Records on sale by all dealers in Victor products on the 1st of each month.

Victrola No. 300  
\$250

Victrola No. 300, electric, \$290  
Mahogany, oak or walnut

# Victrola

REG. U.S. PAT. OFF.



Important: Look for these trade-marks. Under the lid. On the label.  
**Victor Talking Machine Company, Camden, New Jersey**